


Product datasheet

Specifications



FRONT PLATE ISFT 160 VERTIC W600/W650 6M

LVS03321

EAN Code: 3606481873590

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Type of front plate	Cut-out
Installed device	FuPact: fixed ISFT160 - control: fuse carriers handle - vertical installation
Poles description	4 x 3P: mounting plate support: ISFT160 vertical installation
Operating position	Vertical

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Connection position	Direct connection Rear connection
Number of vertical modules [50 mm]	6
Standards	IEC 61439-1 IEC 61439-2
Product certifications	ASTA
Material	Steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Textured Matt
Colour	White (RAL 9003)
Width	500 mm
Height	300 mm
Net weight	1.12 kg
Quantity per set	Set of 1

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

functional unit	600 mm PrismaSeT G floor-standing enclosure FuPact ISFT160 fixed fuse carriers handle vertical 3P 4 direct 8
	600 mm PrismaSeT G wall-mounted enclosure FuPact ISFT160 fixed fuse carriers handle vertical 3P 4 direct 8
	600 mm PrismaSeT G floor-standing enclosure FuPact ISFT160 fixed fuse carriers handle vertical 3P 4 rear connection on busbar 8
	600 mm PrismaSeT G wall-mounted enclosure FuPact ISFT160 fixed fuse carriers handle vertical 3P 4 rear connection on busbar 8
	650 mm 400 mm PrismaSeT P cubicle FuPact ISFT160 fixed fuse carriers handle vertical 3P 4 rear connection on busbar 6
	650 mm 400 mm PrismaSeT P cubicle FuPact ISFT160 fixed fuse carriers handle vertical 3P 4 direct 6

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	31.500 cm
Package 1 Length	51.500 cm
Package 1 Weight	1.110 kg
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Height	16.500 cm
Package 2 Width	32.000 cm
Package 2 Length	53.000 cm
Package 2 Weight	11.400 kg
Unit Type of Package 3	P12
Number of Units in Package 3	180
Package 3 Height	78.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	213.800 kg

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture

End of life manual availability


No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

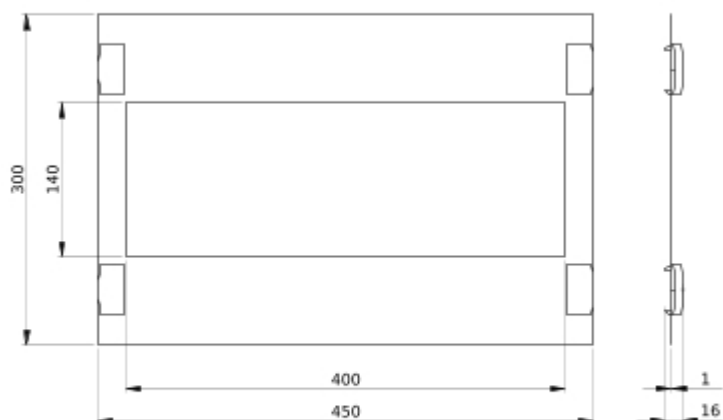

- All dimensions are approximate and are in
- Also see technical documentation.