


# OY5100



## Measuring light grid

OYA0140-15-0-10-C-3-IO

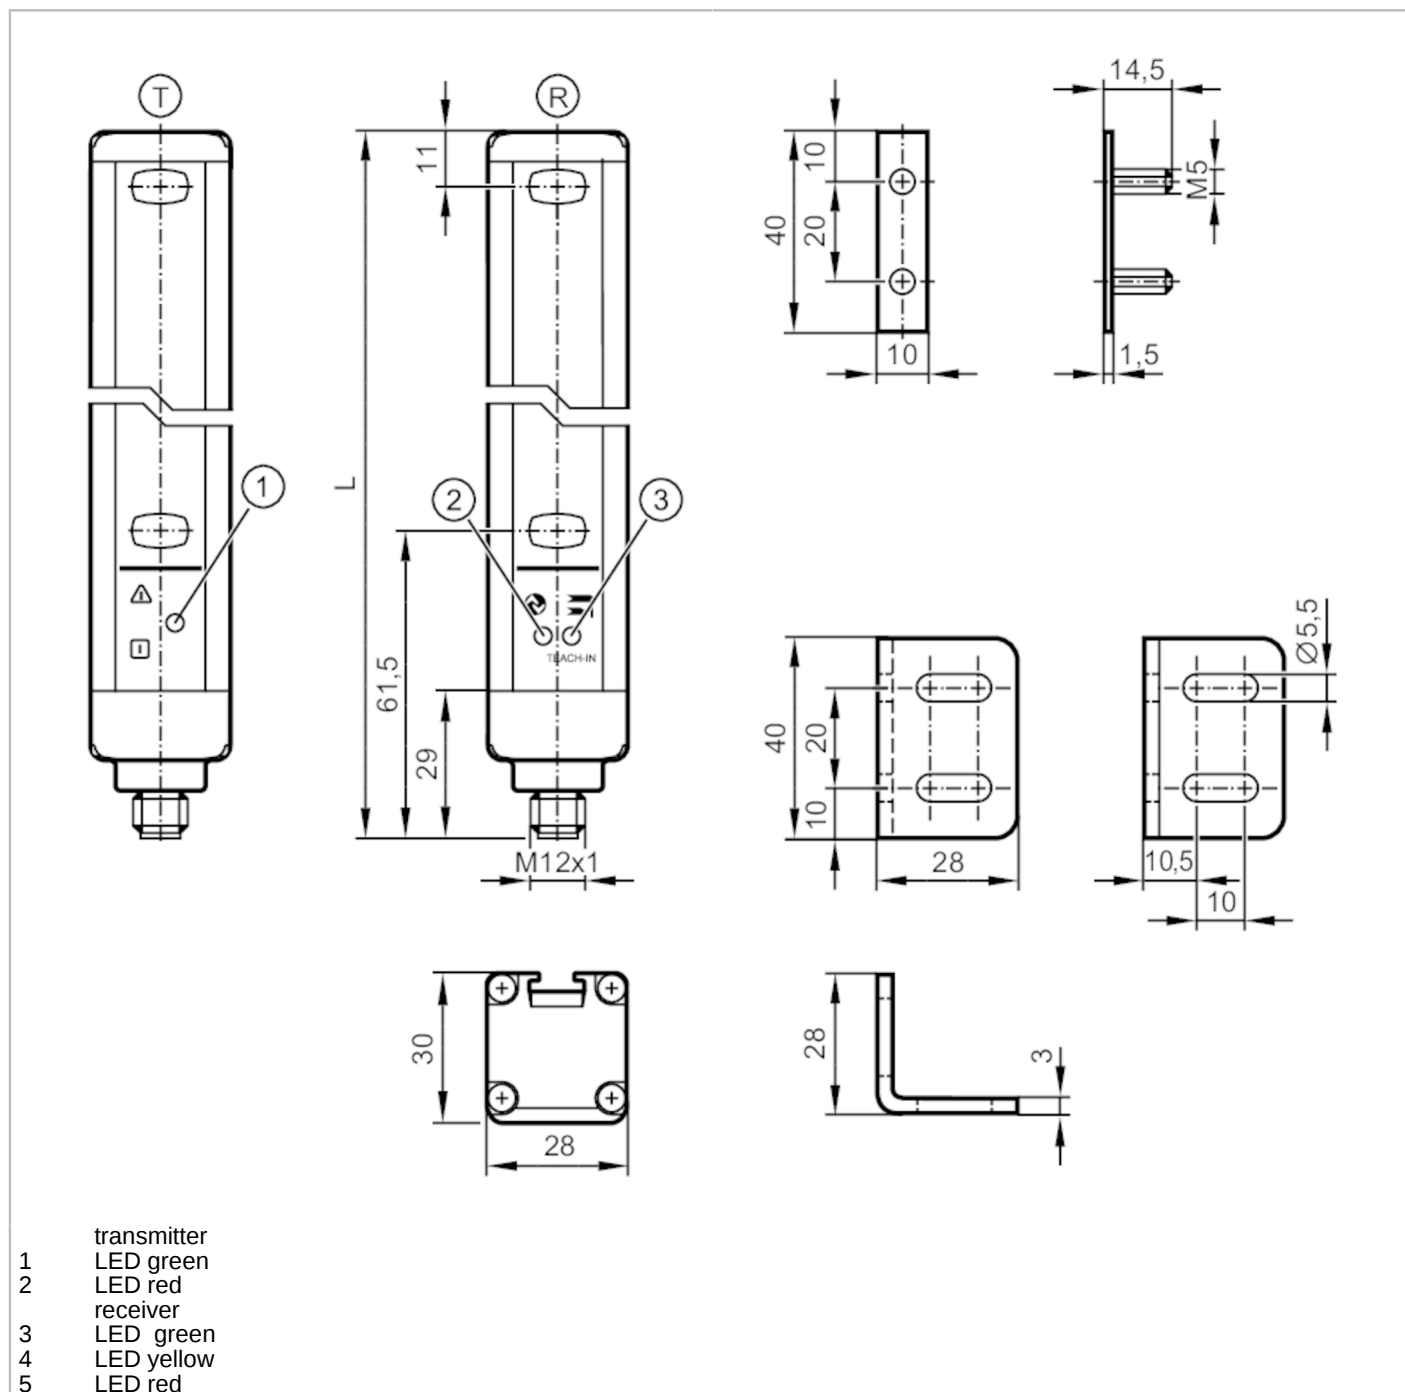

### Product characteristics

Type of light	infrared light
Electrical design	PNP/NPN; (parameterisable)
Output function	normally open / normally closed; (parameterisable)
Protection	IP 65; IP 67

### Electrical data

Operating voltage	[V]	19.2...28.8 DC
Protection class		III



## Measuring light grid

OYA0140-15-0-10-C-3-IO

Reverse polarity protection		yes
Max. power-on delay time	[ms]	300
Type of light		infrared light
Wave length	[nm]	880
<b>Receiver</b>		
Current consumption	[mA]	85
<b>Transmitter</b>		
Current consumption	[mA]	15
<b>Inputs / outputs</b>		
Number of inputs and outputs		Number of digital outputs: 1
<b>Outputs</b>		
Electrical design		PNP/NPN; (parameterisable)
Number of digital outputs		1
Output function		normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]	2
Max. current load per output	[mA]	100
Switching frequency DC	[Hz]	16
Short-circuit protection		yes
Overload protection		yes
<b>Detection zone</b>		
Number of beams		15
Sensing field height	[mm]	140
Sensing field width (low light intensity)	[m]	0...2
Sensing field width (high light intensity)	[m]	1...10
Distance between beams	[mm]	10
<b>Software / programming</b>		
Parameter setting options		hysteresis / window; second switch point; Switch-on and switch-off delay; switch-on operations; Teach function; light-on/dark-on mode
<b>Interfaces</b>		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles	Common - I&D	Identification and Diagnosis
	Function	Multiple switching signal
SIO mode		yes
Required master port type		A
Min. process cycle time	[ms]	10.4
IO-Link process data (cyclical)	<b>function</b>	<b>bit length</b>
	process value	80
	device status	4
	binary switching information	2

# OY5100



## Measuring light grid

OYA0140-15-0-10-C-3-IO

IO-Link functions (acyclical)	application specific tag; operating hours counter	
Supported DeviceIDs	<b>Type of operation</b>	<b>DeviceID</b>
Note	default	1399
For further information please see the IODD PDF file under "Downloads"		

Operating conditions		
Ambient temperature	[°C]	-10...55
Storage temperature	[°C]	-25...70
Protection		IP 65; IP 67
Max. immunity to extraneous light	[klx]	10

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	Class A
Vibration resistance	EN 60068-2-6 Fc	(10-55) Hz 1 mm amplitude, oscillation period 5 min., 30 min. per axis at resonance or 55 Hz
Shock resistance	EN 60068-2-27 Ea	30 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
MTTF	[years]	389


Mechanical data		
Weight	[g]	1079.1
Housing		rectangular
Dimensions	[mm]	213 x 30 x 28
Materials		housing: aluminium; front pane: PC
Length L	[mm]	213

Displays / operating elements		
Display	transmitter	2 LED
	receiver	3 LED

Accessories		
Items supplied	mounting bracket: 2	
	slot nuts: 2	
	Nuts	

Remarks		
Pack quantity	1 pcs.	

**Electrical connection - receiver**  
Connector: 1 x M12; coding: A






## Measuring light grid


OYA0140-15-0-10-C-3-IO

### Connection

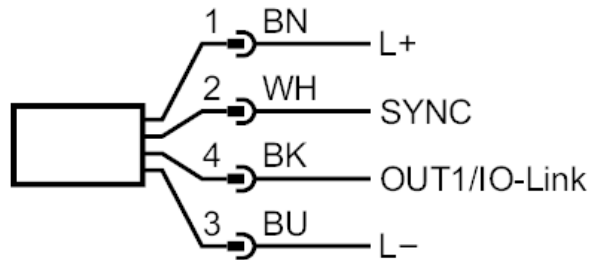

### Electrical connection - transmitter

Connector: 1 x M12; coding: A



### Connection

