



RCBO, 10 kA, 2P Type A, 30 mA, C-Char, In: 20A Un: 230V super-resistant

Model	
product brand name	SENTRON
product designation	RCBO
design of the product	Super resistant K
General technical data	
number of poles	2
number of poles with protection	2
design of pole	2P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui) rated value	500 V
surge voltage resistance rated value	4 000 V
surge current resistance at (8/20) $\mu$ s	3 kA
tripping fault current rated value	30 mA
<ul style="list-style-type: none"> <li>• operational current                             <ul style="list-style-type: none"> <li>— at 30 °C rated value</li> <li>— at 40 °C rated value</li> <li>— at 45 °C rated value</li> <li>— at 50 °C rated value</li> <li>— at 55 °C rated value</li> <li>— at 60 °C rated value</li> <li>— at 70 °C rated value</li> </ul> </li> <li>• operational current at AC rated value</li> </ul>	20 A 19.5 A 19.2 A 18.9 A 18.7 A 18.4 A 17.8 A 20 A
residual current type	A
Supply voltage	
supply voltage <ul style="list-style-type: none"> <li>• at AC rated value</li> <li>• for testing equipment minimum</li> </ul>	230/240 V 195 V
operating frequency	50/60 Hz
supply voltage frequency rated value	50 Hz
Protection class	
protection class IP	IP20, if the distribution board is installed, with connected conductors
Breaking Capacity	
switching capacity current	

<ul style="list-style-type: none"> <li>• according to EN 60898 rated value</li> </ul>	10 kA
<ul style="list-style-type: none"> <li>• according to IEC 60947-2 rated value</li> </ul>	15 kA
<b>short-circuit current breaking capacity (I<sub>cn</sub>) according to EN 61009-1 rated value</b>	10 kA
<b>rated residual switching capacity (I<sub>Δm</sub>) according to IEC 61009-1</b>	4.5 kA
<b>energy limitation class</b>	3

#### Dissipation

<b>power loss [W]</b>	
<ul style="list-style-type: none"> <li>• for rated value of the current at AC in hot operating state per pole</li> </ul>	1.36 W
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	2.7 W

#### Product details

<b>product feature touch protection</b>	Yes
product component neutral conductor switching	Yes
<b>product feature halogen-free</b>	No

#### Connections

<b>connectable conductor cross-section solid</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	1 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	35 mm <sup>2</sup>
<b>connectable conductor cross-section stranded</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	1 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	35 mm <sup>2</sup>
<b>connectable conductor cross-section finely stranded with core end processing</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	1 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	35 mm <sup>2</sup>
<b>tightening torque with screw-type terminals</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	2 N·m
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	2 N·m
<b>position of power supply cord</b>	Either top or bottom

#### Mechanical Design

<b>height</b>	85 mm
<b>width</b>	36 mm
<b>depth</b>	72 mm
<b>installation depth</b>	70 mm
<b>number of modular width units</b>	2
<b>mounting position</b>	any
<b>Net Weight</b>	259 g
<b>weight with packaging</b>	275 g

#### Environmental conditions

<b>influence of the surrounding temperature</b>	Max. 95% humidity
<b>ambient temperature during operation</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	-25 °C
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	40 °C
<b>ambient temperature during storage</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	-40 °C
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	70 °C
<b>number of test cycles for environmental testing according to IEC 60068-2-30</b>	28

#### Approvals Certificates

<b>Environment</b>	<b>General Product Approval</b>
--------------------	---------------------------------

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)



[Confirmation](#)



<b>General Product Approval</b>	<b>other</b>
---------------------------------	--------------

### Dangerous goods

[Transport Information](#)

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SU1324-7FR20>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SU1324-7FR20>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SU1324-7FR20](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SU1324-7FR20)

#### CAX-Online-Generator


<https://www.siemens.com/cax>

#### Tender specifications

<https://www.siemens.com/specifications>

#### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

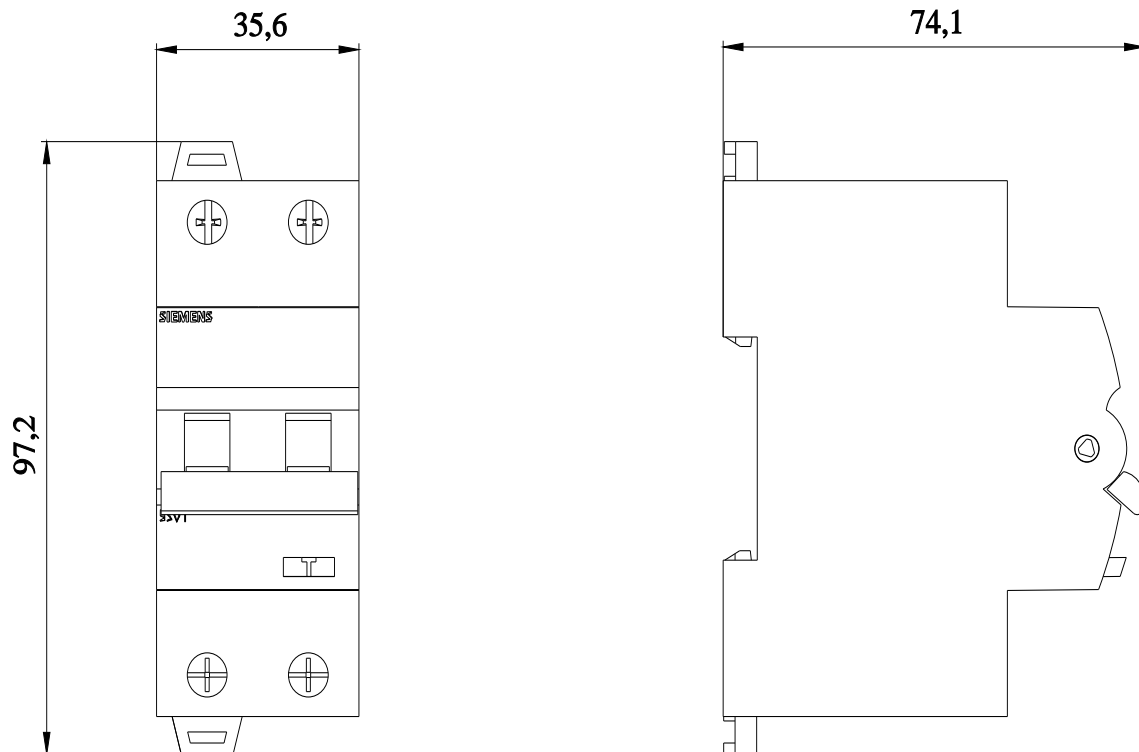



---

last modified:

7/22/2025 