


# Product datasheet

Specifications

## W650 MODULAR DEVICE RAIL PRISMA P



LVS03401

EAN Code: 3606481875563

### Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Rail
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P
Type of rail	Modular
Installed device	Acti 9: fixed C120 without earth leakage protection - control: toggle TeSys: fixed GV2LE TeSys: fixed GV2ME TeSys: fixed GV2RTn Acti 9: fixed iC120 without earth leakage protection - control: toggle Vigilohm: IM20 Vigilohm: IM20H ComPact: fixed INS100 - control: direct front rotary handle - vertical installation ComPact: fixed INS160 - control: direct front rotary handle - vertical installation ComPact: fixed INS40 - control: direct front rotary handle - vertical installation ComPact: fixed INS63 - control: direct front rotary handle - vertical installation Acti 9: fixed modular device Multi9: fixed modular device Multi9: fixed NG125 without earth leakage protection - control: toggle Multi9: fixed NG125 NA - control: toggle Vigirex: RH10 Vigirex: RH21 Vigirex: RH99 Acti 9: fixed C120 with earth leakage protection - control: toggle Acti 9: fixed iC120 with earth leakage protection - control: toggle Multi9: fixed NG125 with earth leakage protection - control: toggle Acti 9: fixed 1/2 or 1 module lamp - horizontal installation ComPact: fixed INS125 - control: direct front rotary handle - vertical installation Acti 9: fixed modular device <= 40 A Multi9: fixed modular device <= 40 A Vigilohm: IM10 Vigilohm: IM10H Vigilohm: IM9 Vigilohm: IM9-OL Acti 9: measurement device Multi9: measurement device Vigirex: RH197M

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Poles description</b>	1 x 3P: fixed C120 1 x 4P: fixed C120 9 x 3P: fixed GV2LE 9 x 3P: fixed GV2ME 9 x 3P: fixed GV2RTn 1 x 3P: fixed iC120 1 x 4P: fixed iC120 1 x 3P: fixed INS100 vertical installation 1 x 4P: fixed INS100 vertical installation 1 x 3P: fixed INS160 vertical installation 1 x 4P: fixed INS160 vertical installation 1 x 3P: fixed INS40 vertical installation 1 x 4P: fixed INS40 vertical installation 1 x 3P: fixed INS63 vertical installation 1 x 4P: fixed INS63 vertical installation 1 x 3P: fixed NG125 1 x 4P: fixed NG125 1 x 3P: fixed NG125 NA 1 x 4P: fixed NG125 NA 1 x 3P: fixed INS125 vertical installation 1 x 4P: fixed INS125 vertical installation
--------------------------	--

## Complementary

<b>installation description</b>	Cubicle - width 650 mm depth 400 mm
<b>Enclosure nominal height</b>	2000 mm
<b>Number of vertical modules [50 mm]</b>	2 module(s): 1/2 or 1 module lamp, direct in 650 mm Widecubicle 5 module(s): C120 without earth leakage protection , direct in 650 mm Widecubicle 3 module(s): GV2LE, direct in 650 mm Widecubicle 3 module(s): GV2ME, direct in 650 mm Widecubicle 3 module(s): GV2RTn, direct in 650 mm Widecubicle 5 module(s): iC120 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): IM10 in 650 mm Widecubicle 4 module(s): IM10H in 650 mm Widecubicle 4 module(s): IM20 in 650 mm Widecubicle 4 module(s): IM20H in 650 mm Widecubicle 3 module(s): IM9 in 650 mm Widecubicle 3 module(s): IM9-OL in 650 mm Widecubicle 4 module(s): INS100, direct in 650 mm Widecubicle 5 module(s): INS100, direct in 650 mm Widecubicle 4 module(s): INS125, direct in 650 mm Widecubicle 5 module(s): INS125, direct in 650 mm Widecubicle 4 module(s): INS160, direct in 650 mm Widecubicle 5 module(s): INS160, direct in 650 mm Widecubicle 4 module(s): INS40, direct in 650 mm Widecubicle 4 module(s): INS63, direct in 650 mm Widecubicle 3 module(s): measurement device in 650 mm Widecubicle 3 module(s): modular device <= 40 A, direct in 650 mm Widecubicle 8 module(s): modular device <= 40 A, direct in 650 mm Widecubicle 4 module(s): modular device, direct in 650 mm Widecubicle 5 module(s): NG125 without earth leakage protection , direct in 650 mm Widecubicle 5 module(s): NG125 NA, direct in 650 mm Widecubicle 3 module(s): RH10 in 650 mm Widecubicle 3 module(s): RH197M in 650 mm Widecubicle 3 module(s): RH21 in 650 mm Widecubicle 3 module(s): RH99 in 650 mm Widecubicle 5 module(s): C120 with earth leakage protection , direct in 650 mm Widecubicle 5 module(s): iC120 with earth leakage protection , direct in 650 mm Widecubicle 5 module(s): NG125 with earth leakage protection , direct in 650 mm Widecubicle
<b>9 mm pitches</b>	48
<b>Quantity per set</b>	Set of 1
<b>Height</b>	43 mm
<b>Width</b>	592 mm
<b>Depth</b>	126 mm
<b>Product weight</b>	0.5 kg
<b>Colour</b>	Natural
<b>Material</b>	Metal

## Environment

---

Standards	IEC 61439-2 IEC 61439-1
-----------	----------------------------

---

Product certifications	ASTA
------------------------	------

## Packing Units

---

Unit Type of Package 1	PCE
------------------------	-----

---

Number of Units in Package 1	1
------------------------------	---

---

Package 1 Height	4.300 cm
------------------	----------

---

Package 1 Width	12.800 cm
-----------------	-----------

---

Package 1 Length	60.500 cm
------------------	-----------

---

Package 1 Weight	494.000 g
------------------	-----------

---

Unit Type of Package 2	BB1
------------------------	-----

---

Number of Units in Package 2	12
------------------------------	----

---

Package 2 Height	14.800 cm
------------------	-----------

---

Package 2 Width	27.600 cm
-----------------	-----------

---

Package 2 Length	62.700 cm
------------------	-----------

---

Package 2 Weight	6.196 kg
------------------	----------

---

Unit Type of Package 3	P12
------------------------	-----

---

Number of Units in Package 3	240
------------------------------	-----

---

Package 3 Height	67.000 cm
------------------	-----------

---

Package 3 Width	80.000 cm
-----------------	-----------

---

Package 3 Length	120.000 cm
------------------	------------

---

Package 3 Weight	135.920 kg
------------------	------------

## Logistical informations

---

Country of origin	IT
-------------------	----

## Contractual warranty

---

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better



### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

EU RoHS Directive

[Compliant](#)

REACH Regulation

[Free of Substances of Very High Concern above the threshold](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

## Use Longer



### Lifetime extension

Repair

No

## Use Again



### Repack and remanufacture

End of life manual availability

No need of specific recycling operations


Take-back

Nej

Technical Illustration

Dimensions

---

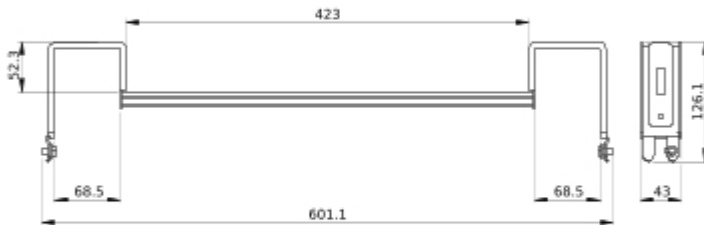

- All dimensions are approximate and are in  
- Also see technical documentation.