


Product datasheet

Specifications



Mounting Plate Vert. Withd. NT-MTZ1/NS 3P/4P 1600A W650 Prisma P

LVS03483

EAN Code: 3606481874498

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
installation description	Cubicle - width 650 mm depth 400 mm Cubicle - width 650 mm depth 800 mm
Installed device	ComPact: drawout NS1250 - control: toggle - vertical installation ComPact: drawout NS1250 - control: direct front rotary handle - vertical installation ComPact: drawout NS1250 - control: motor mechanism - vertical installation ComPact: drawout NS1600 - control: toggle - vertical installation ComPact: drawout NS1600 - control: direct front rotary handle - vertical installation ComPact: drawout NS1600 - control: motor mechanism - vertical installation ComPact: drawout NS630b...1000 - control: toggle - vertical installation ComPact: drawout NS630b...1000 - control: direct front rotary handle - vertical installation ComPact: drawout NS630b...1000 - control: motor mechanism - vertical installation Masterpact: drawout NT06...10 - control: toggle - vertical installation Masterpact: drawout NT06...10 - control: motor mechanism - vertical installation Masterpact: drawout NT12 - control: toggle - vertical installation Masterpact: drawout NT12 - control: motor mechanism - vertical installation Masterpact: drawout NT16 - control: toggle - vertical installation Masterpact: drawout NT16 - control: motor mechanism - vertical installation
Poles description	1 x 3P: drawout NS1250 vertical installation 1 x 4P: drawout NS1250 vertical installation 1 x 3P: drawout NS1600 vertical installation 1 x 4P: drawout NS1600 vertical installation 1 x 3P: drawout NS630b...1000 vertical installation 1 x 4P: drawout NS630b...1000 vertical installation 1 x 3P: drawout NT06...10 vertical installation 1 x 4P: drawout NT06...10 vertical installation 1 x 3P: drawout NT12 vertical installation 1 x 4P: drawout NT12 vertical installation 1 x 3P: drawout NT16 vertical installation 1 x 4P: drawout NT16 vertical installation

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Number of vertical modules [50 mm]	16 module(s): NS1250, rear connection on Canalis in 650 mm Widecubicle 16 module(s): NS1600, rear connection on Canalis in 650 mm Widecubicle 16 module(s): NS630b...1000, rear connection on Canalis in 650 mm Widecubicle 18 module(s): NS1250, front connection on Canalis in 650 mm Widecubicle 15 module(s): NS1250, front connection on adaptor in 650 mm Widecubicle 11 module(s): NS1250, rear connection on adaptor in 650 mm Widecubicle 15 module(s): NS1600, front connection on adaptor in 650 mm Widecubicle 11 module(s): NS1600, rear connection on adaptor in 650 mm Widecubicle 18 module(s): NS630b...1000, front connection on Canalis in 650 mm Widecubicle 13 module(s): NS630b...1000, front connection on adaptor in 650 mm Widecubicle 11 module(s): NS630b...1000, rear connection on adaptor in 650 mm Widecubicle 13 module(s): NT06...10, front connection on adaptor in 650 mm Widecubicle 11 module(s): NT06...10, rear connection on adaptor in 650 mm Widecubicle 18 module(s): NT06...10, front connection on Canalis in 650 mm Widecubicle 16 module(s): NT06...10, rear connection on Canalis in 650 mm Widecubicle 15 module(s): NT12, front connection on adaptor in 650 mm Widecubicle 11 module(s): NT12, rear connection on adaptor in 650 mm Widecubicle 18 module(s): NT12, front connection on Canalis in 650 mm Widecubicle 16 module(s): NT12, rear connection on Canalis in 650 mm Widecubicle 15 module(s): NT16, front connection on adaptor in 650 mm Widecubicle 11 module(s): NT16, rear connection on adaptor in 650 mm Widecubicle 16 module(s): NT16, rear connection on Canalis in 650 mm Widecubicle
---	--

Standards IEC 61439-2

Product certifications ASTA

Complementary

Material Sheet steel

Protective treatment Electrophoresis treatment and hot-polymerised polyester epoxy powder

Surface finish Textured
Matt

Colour White (RAL 9003)

Width 650 mm

Height 30 mm

Product weight 3.2 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.400 cm
Package 1 Width	17.200 cm
Package 1 Length	57.200 cm
Package 1 Weight	3.219 kg
Unit Type of Package 2	P12
Number of Units in Package 2	80
Package 2 Height	75.000 cm
Package 2 Width	80.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	271.000 kg

Logistical informations

Country of origin	IT
-------------------	----

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

EU RoHS Directive

[Compliant](#)

REACH Regulation

[Free of Substances of Very High Concern above the threshold](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture

End of life manual availability


No need of specific recycling operations

Take-back

Nej

Technical Illustration

Dimensions

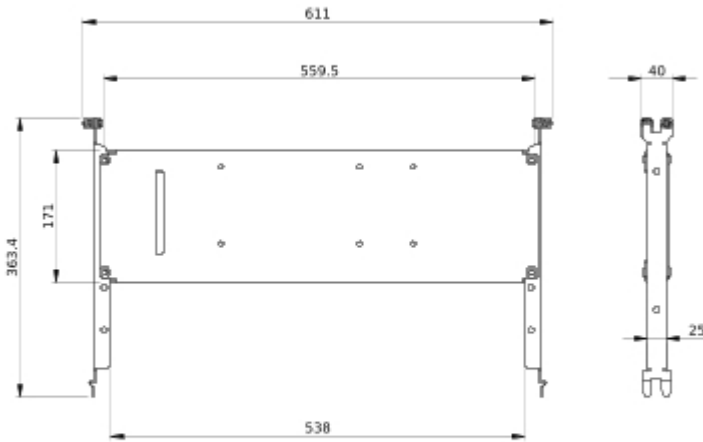

- All dimensions are approximate and are in mm
- Also see technical documentation.