


# Product datasheet

Specifications

## FR.PL.96x96 3 CUT-OUT MET.DEV/PB W600 3M



LVS03911

EAN Code: 3606481874061

### Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Type of front plate	Cut-out
type of front plate	Cut-out
Installed device	Vigilohm: IM20 Vigilohm: IM20H Human-switchboard interface: 96 x 96 mm device Human-switchboard interface: HSI PowerLogic: PM400...800 Vigilohm: IM10 Vigilohm: IM10H Enerlin'X: FDM121

### Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Number of vertical modules [50 mm]	3
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASTA
Material	Steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	500 mm
Height	150 mm
Product weight	0.46 kg
Quantity per set	Set of 1

<b>functional unit</b>	600 mm PrismaSeT G floor-standing enclosure human-switchboard interface 96 x 96 mm device 3 3
	600 mm PrismaSeT G wall-mounted enclosure human-switchboard interface 96 x 96 mm device 3 3
	650 mm 400 mm PrismaSeT P cubicle human-switchboard interface 96 x 96 mm device 3 3
	600 mm PrismaSeT G floor-standing enclosure human-switchboard interface HSI 3 3
	600 mm PrismaSeT G wall-mounted enclosure human-switchboard interface HSI 3 3
	650 mm 400 mm PrismaSeT P cubicle human-switchboard interface HSI 3 3
	600 mm PrismaSeT G floor-standing enclosure PowerLogic 3 3
	600 mm PrismaSeT G wall-mounted enclosure PowerLogic 3 3
	650 mm 400 mm PrismaSeT P cubicle PowerLogic 3 3
	650 mm 400 mm PrismaSeT P cubicle VigiloHM 3 3
	600 mm PrismaSeT G floor-standing enclosure Enerlin'X FDM121 3 3
	600 mm PrismaSeT G wall-mounted enclosure Enerlin'X FDM121 3 3
	650 mm 400 mm PrismaSeT P cubicle Enerlin'X FDM121 3 3

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	3.000 cm
<b>Package 1 Width</b>	16.500 cm
<b>Package 1 Length</b>	51.500 cm
<b>Package 1 Weight</b>	507.000 g
<b>Unit Type of Package 2</b>	BB1
<b>Number of Units in Package 2</b>	10
<b>Package 2 Height</b>	16.500 cm
<b>Package 2 Width</b>	17.500 cm
<b>Package 2 Length</b>	53.000 cm
<b>Package 2 Weight</b>	5.270 kg
<b>Unit Type of Package 3</b>	P12
<b>Number of Units in Package 3</b>	90
<b>Package 3 Height</b>	30.000 cm
<b>Package 3 Width</b>	80.000 cm
<b>Package 3 Length</b>	120.000 cm
<b>Package 3 Weight</b>	59.630 kg

## Logistical informations

<b>Country of origin</b>	FR
--------------------------	----

## Contractual warranty

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better



### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

EU RoHS Directive

[Compliant](#)

REACH Regulation

[Free of Substances of Very High Concern above the threshold](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

## Use Longer



### Lifetime extension

Repair

No

## Use Again



### Repack and remanufacture

End of life manual availability

No need of specific recycling operations


Take-back

Nej

Technical Illustration

Dimensions

---

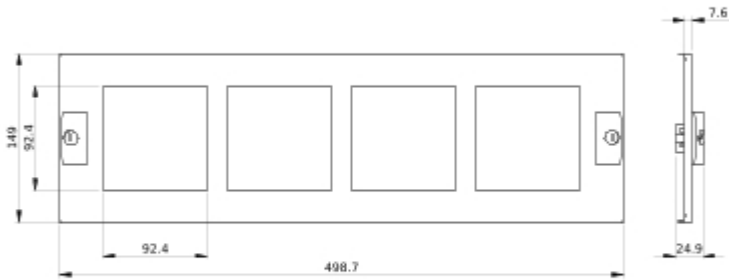


- All dimensions are approximate and are in  
- Also see technical documentation.

Technical Illustration

Assembly's dimensions

---

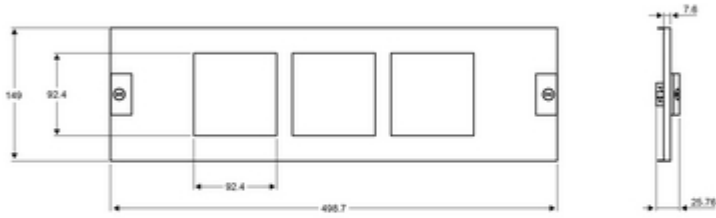

- All dimensions are approximate and are in mm.  
- Also see technical documentation.