


Product datasheet

Specifications



LINERGY FC DISTRIBUTION BLOCK FOR COMPACT NSX250 3P TOGGLE/FIXED+CONNECTION

LVS04403

EAN Code: 3606481870636

Main

Range	Linergy
Range of product	Linergy
Product or component type	Device feeder
Product name	Linergy FC
Range compatibility	PrismaSeT PrismaSeT P cubicle
Accessory / separate part category	Connection accessory
Provided equipment	Prefabricated flexible connection to Linergy busbars

Complementary

Poles description	3P
Installed device	ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX250 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX100...160 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX250 with earth leakage protection - control: toggle - vertical installation ComPact: fixed INS250 - control: direct front rotary handle - vertical installation ComPact: fixed INV250 - control: direct front rotary handle - vertical installation
Number of devices	4 (3P)
Installation direction	Horizontal
installation description	Cubicle - width 650 mm
Mounting support	Mounting plate
[Ui] rated insulation voltage	750 V AC
[Uimp] rated impulse withstand voltage	8 kV
[Ie] rated operational current	800 A at 40 °C
[Ue] rated operational voltage	690 V
[Ipk] rated peak withstand current	50 kA
I ^t on activation	25000000 A ² .s
Permissible current	800 A at 40 °C 725 A at 60 °C 675 A at 70 °C
Standards	IEC 61439-1 IEC 61439-2
Product certifications	KEMA ASEFA

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Quantity per set	Set of 1
Length	440 mm
Height	132 mm
Depth	235 mm
Product weight	6 kg
Colour	Black
Connections - terminals	Supply: flexible bars (phase) , 32 x 6 mm Outgoer: plug in (phase) , 4 outgoers

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.000 cm
Package 1 Width	25.500 cm
Package 1 Length	45.500 cm
Package 1 Weight	5.930 kg
Unit Type of Package 2	P12
Number of Units in Package 2	35
Package 2 Height	88.000 cm
Package 2 Width	80.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	219.550 kg

Logistical informations

Country of origin	FR
-------------------	----

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

EU RoHS Directive

[Compliant](#)

REACH Regulation

[Free of Substances of Very High Concern above the threshold](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture

End of life manual availability

No need of specific recycling operations

Take-back

Nej


WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Dimensions

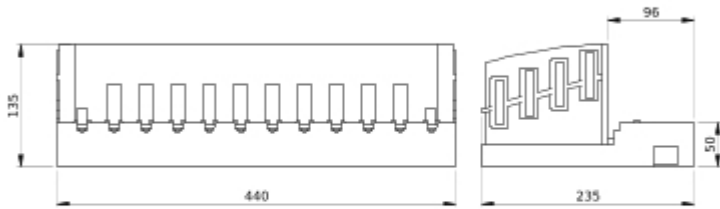

- All dimensions are approximate and are in
- Also see technical documentation.