

# FRONT-ZFL 1,5/D32 - Female connector strip


2201632

<https://www.phoenixcontact.com/gb/products/2201632>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



BOX



19" socket strip, color: green, number of positions: 32, product range: FRONT-ZFL 1,5, pitch: 5.08 mm, type of packaging: packed in cardboard

## Commercial data

Item number	2201632
Packing unit	10 pc
Minimum order quantity	10 pc
Note	Made to order (non-returnable)
Sales key	AAHHBA
Product key	AAHHBA
GTIN	4017918902001
Weight per piece (including packing)	55.47 g
Weight per piece (excluding packing)	55.09 g
Customs tariff number	85366990
Country of origin	CN

# FRONT-ZFL 1,5/D32 - Female connector strip

2201632

<https://www.phoenixcontact.com/gb/products/2201632>

## Technical data

### Product properties

Product family	FRONT-ZFL 1,5
Type	D
Number of positions	32
Pitch	5.08 mm


### Electrical properties

Rated surge voltage (II/2)	4 kV
----------------------------	------

### Connection data

Connection method	Spring-cage connection
Stripping length	11 mm

### Dimensions

Dimensional drawing	
Width	94.7 mm
Height	20.3 mm
Length	28.5 mm
Pitch	5.08 mm

### Material specifications

Color (Housing)	green (RAL 6021)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PBT
Contact surface	Tin Sn

### Standards and regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

### Packaging specifications

Type of packaging	packed in cardboard
-------------------	---------------------

# FRONT-ZFL 1,5/D32 - Female connector strip


2201632

<https://www.phoenixcontact.com/gb/products/2201632>



## Drawings

Dimensional drawing

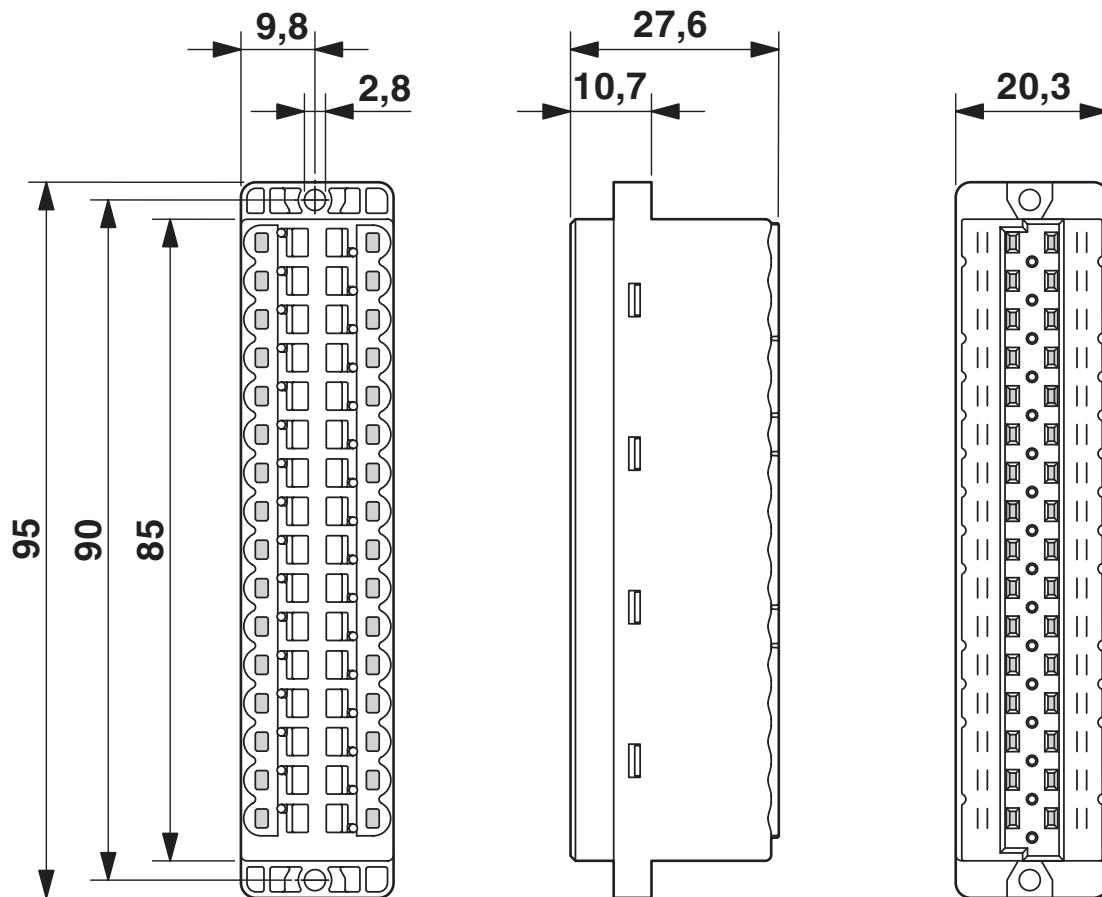

# FRONT-ZFL 1,5/D32 - Female connector strip




2201632

<https://www.phoenixcontact.com/gb/products/2201632>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2201632>

 <b>cULus Recognized</b> Approval ID: E60425-20020920		Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
B		300 V	4 A	24 - 16	-
D		300 V	4 A	24 - 16	-

# FRONT-ZFL 1,5/D32 - Female connector strip



2201632

<https://www.phoenixcontact.com/gb/products/2201632>

## Classifications

### ECLASS

ECLASS-13.0	27460101
ECLASS-15.0	27460101

### ETIM

ETIM 10.0	EC002643
-----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# FRONT-ZFL 1,5/D32 - Female connector strip



2201632

<https://www.phoenixcontact.com/gb/products/2201632>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

### EF3.1 Climate Change

CO2e kg	4.793 kg CO2e
---------	---------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)