



Fixed-mounted circuit breaker IEC 60947-2, frame size 2, 3-poles, $I_n=2500A$ up to 690V AC 50/60Hz, breaking capacity S $I_{cu}=66/50kA$ at 500/690V, Trip unit ETU600 LSI upgrade ready , colordisplay, bluetooth and USB interface, Protection LT, ST, INST, N-protection required an external N-sensor, incl. trip alarm switch (1xCO), rear connection horizontal, without Com & metering function Manual operating mechanism with mechanical closing, without Spring charging motor, Ready-to-close signal. switch, Auxiliary switches 4NO+4NC, without Closing coil (CC), manual operating mechanism with mechanical closing, without Remote trip alarm reset coil (RR), Undervoltage release (UVR) instantaneous (0,08 s) and short-delay (0,2 s), 208-240 V AC / 220-250 V DC, Shunt trip (ST) 100% OP 208-240 V AC / 220-250 V DC, suitable for continuous duty, Option T40 = Door sealing frame IP41

Model	
product brand name	SENTRON
product designation	Air circuit breaker
suitability for use	circuit breaker
size of the circuit-breaker	II
number of poles	3
position / of neutral conductor	no internal N-conductor
fastening method	fixed-mounted circuit breakers
design of the product	AC application
type of the driving mechanism	manual operating mechanism with mechanical or electrical closing
design of the electronic trip unit	ETU600 LSI
Weight	58.123 kg
Net Weight	45.123 kg
General technical data	
insulation voltage / rated value	1000 V
operating voltage / at AC / at 50/60 Hz / rated value	690 V
power loss [W] / maximum	270 W
Current	
continuous current / rated value / maximum	2500 A
continuous current / rated value	2500 A
operational current	
• at 40 °C / rated value	2500 A
• at 45 °C / rated value	2500 A
• at 50 °C / rated value	2500 A
• at 55 °C / rated value	2500 A
• at 60 °C / rated value	2500 A
• at 65 °C / rated value	2500 A
• at 70 °C / rated value	2500 A
Switching capacity and short-time withstand current, according to IEC 60947-2	
switching capacity class of the circuit breaker	S
maximum short-circuit current breaking capacity (I_{cu})	
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA
operating short-circuit current breaking capacity (I_{cs})	
• at 500 V / rated value	66 kA
• at 690 V / rated value	50 kA

short-circuit current making capacity (I _{cm})	
• at 500 V / rated value	145 kA
• at 690 V / rated value	105 kA
short-time withstand current (I _{cw}) / at 500 V AC	
• for 0.5 s / rated value	66 kA
• for 1 s / rated value	66 kA
• for 2 s / rated value	66 kA
• for 3 s / rated value	55 kA
short-time withstand current (I _{cw}) / at 690 V AC	
• for 0.5 s / rated value	50 kA
• for 1 s / rated value	50 kA
• for 2 s / rated value	50 kA
• for 3 s / rated value	50 kA
Electronic release unit	
product feature	
• upgradable	Yes
• Bluetooth and USB interface	Yes
• decoder for basic protection functions	Yes
• display and function keys	Yes
• SENTRON powerconfig configuration software	Yes
Basic protection functions	
product feature / for L-tripping	
• can be switched on/off	Yes
• selectable characteristic function	Yes
• decoder and infinite adjustability are selectable with eSet	Yes
set values setting current (I _r) / for L-tripping / with I _{2t} characteristic	0.5; 0.6; 0.7; 0.75; 0.8; 0.85; 0.9; 0.95; 1
reference value setting current (I _r) / for L-tripping / with I _{2t} characteristic	x I _n
set values delay time (t _r) / for L-tripping / with I _{2t} characteristic	1;2;5;8;10;14;17;21;25
reference value delay time (t _r) / for L-tripping / with I _{2t} characteristic	s
set values setting current (I _r) / for L-tripping / with I _{2t} characteristic / for eSet	0.4-1;0.001
adjustable absolute value setting current (I _r) / for L-tripping / with I _{2t} characteristic / for eSet	
• minimum	1000 A
• maximum	2500 A
set values delay time (t _r) / for L-tripping / with I _{2t} characteristic / for eSet	0.5-30;0.001
set values setting current (I _r) / for L-tripping / with I _{4t} characteristic / for eSet	0.4-1;0.001
set values delay time (t _r) / for L-tripping / with I _{4t} characteristic / for eSet	0.5-5;0.001
adjustable absolute value setting current (I _r) / for L-tripping / with I _{4t} characteristic / for eSet	
• minimum	1000 A
• maximum	2500 A
L: Overload protection N-conductor	
product feature / with neutral conductor protection / can be switched on/off	Yes
setting values setting current (I _{nN}) / for N-tripping	0.2-2;0.001
reference value setting current (I _{nN}) / for N-tripping	x I _n
adjustable setting current (I _{nN}) / for N-tripping	
• minimum	500 A
• maximum	5000 A
S: delayed short-circuit protection ST	
product feature / for S-tripping	
• independent of direction / can be switched on/off	Yes
• independent of direction / selectable characteristic function	Yes
• decoder and infinite adjustability are selectable with eSet	Yes

S: delayed short-circuit protection ST, settings values I0t	
set values setting current (I _{sd}) / for S-tripping / with I0t characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I _{sd}) / for S-tripping / with I0t characteristic	x I _r
set values delay time (tsd) / for S-tripping / with I0t characteristic	0.08;0.15;0.22;0.3;0.4
reference value delay time (tsd) / for S-tripping / with I0t characteristic	s
set values setting current (I _{sd}) / for S-tripping / with I0t characteristic / for eSet / independent of direction	0.6-10;0.001
adjustable absolute value setting current (I _{sd}) <ul style="list-style-type: none"> for S-tripping / with I0t characteristic / for eSet / independent of direction / minimum at 500 V / for S-tripping / with I0t characteristic / for eSet / independent of direction / maximum at 690 V / for S-tripping / with I0t characteristic / for eSet / independent of direction / maximum 	1500 A 52.8 kA 40 kA
set values delay time (tsd) / for S-tripping / with I0t characteristic / for eSet / independent of direction	0.02-0.4;0.001
S: delayed short-circuit protection ST, settings values I2t	
set values setting current (I _{sd}) / for S-tripping / with I2t characteristic	1.5;2;2.5;3;4;5;6;8;10
reference value setting current (I _{sd}) / for S-tripping / with I2t characteristic	x I _r
set values delay time (tsd) / for S-tripping / with I2t characteristic	0.1;0.2;0.3;0.4
set values setting current (I _{sd}) / for S-tripping / with I2t characteristic / for eSet / independent of direction	0.6-10;0.001
adjustable absolute value setting current (I _{sd}) <ul style="list-style-type: none"> for S-tripping / with I2t characteristic / for eSet / independent of direction / minimum at 500 V / for S-tripping / with I2t characteristic / for eSet / independent of direction / maximum at 690 V / for S-tripping / with I2t characteristic / for eSet / independent of direction / maximum 	1500 A 52.8 kA 40 kA
set values delay time (tsd) / for S-tripping / with I2t characteristic / for eSet / independent of direction	0.02-0.4; 0.001
product feature / for I-tripping <ul style="list-style-type: none"> can be switched on/off decoder and infinite adjustability are selectable (with eSet) 	Yes Yes
set values setting current (I _i) / for I-tripping	1.5;2;3;4;6;8;10;12;15
reference value setting current (I _i) / for I-tripping	x I _n
tripping factor setting current (I _{imax}) / for I-tripping	0.8
reference value setting current (I _{imax}) / for I-tripping	x I _{cs}
set values setting current (I _i) / for I-tripping / for eSet	1.5-15;0.001
adjustable absolute value setting current (I _i) <ul style="list-style-type: none"> for I-tripping / for eSet / minimum at 500 V / for I-tripping / for eSet / maximum at 690 V / for I-tripping / for eSet / maximum 	3750 A 52.8 kA 40 kA
G: ground fault GF	
product feature / for G-tripping <ul style="list-style-type: none"> selectable characteristic function 	No
Further protective functions	
protection function <ul style="list-style-type: none"> maintenance mode DAS+ 	Yes
Measuring functions	
measurement function <ul style="list-style-type: none"> current measurement 	Yes
Communication	
communication function	No
Service Life	
mechanical service life (operating cycles) <ul style="list-style-type: none"> without support / typical 	10000

• with support / typical	20000
electrical endurance (operating cycles)	
• at 690 V / without support / typical	7500
• at 690 V / with support / typical	20000

Dimensions

height	437 mm
width	460 mm
depth	357 mm

Main connection

arrangement of electrical connectors / for main current circuit	main connection on the rear, horizontal
---	---

Auxiliary circuit

design of the auxiliary switch	4 NO + 4 NC
number of NC contacts / for auxiliary contacts	4
number of NO contacts / for auxiliary contacts	4
number of CO contacts / for auxiliary contacts	0

Internal accessories

product component	
• undervoltage release	Yes
• voltage trigger	Yes
• trip indicator	Yes
• motor drive	No

Environmental conditions

protection class IP / on the front	IP41
ambient temperature / during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	80 °C

Certificates

reference code / according to IEC 81346-2	Q
---	---

Approvals / Certificates

Environment	General Product Approval
-------------	--------------------------



[Confirmation](#)

General Product Approval	EMV	Radio Equipment Type Approval Certificate	Test Certificates
--------------------------	-----	---	-------------------



[Miscellaneous](#)

[Special Test Certificate](#)

Test Certificates	Maritime application
-------------------	----------------------

[Miscellaneous](#)



other	Dangerous goods
-------	-----------------



[Confirmation](#)

[Manufacturer Declaration](#)

[Miscellaneous](#)

[Transport Information](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (catalogues, leaflets,...)

<https://www.siemens.com/energy-automation>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA1225-3AE02-1AQ4-Z T40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA1225-3AE02-1AQ4-Z T40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA1225-3AE02-1AQ4-Z T40

CAX-Online-Generator

<https://www.siemens.com/cax>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

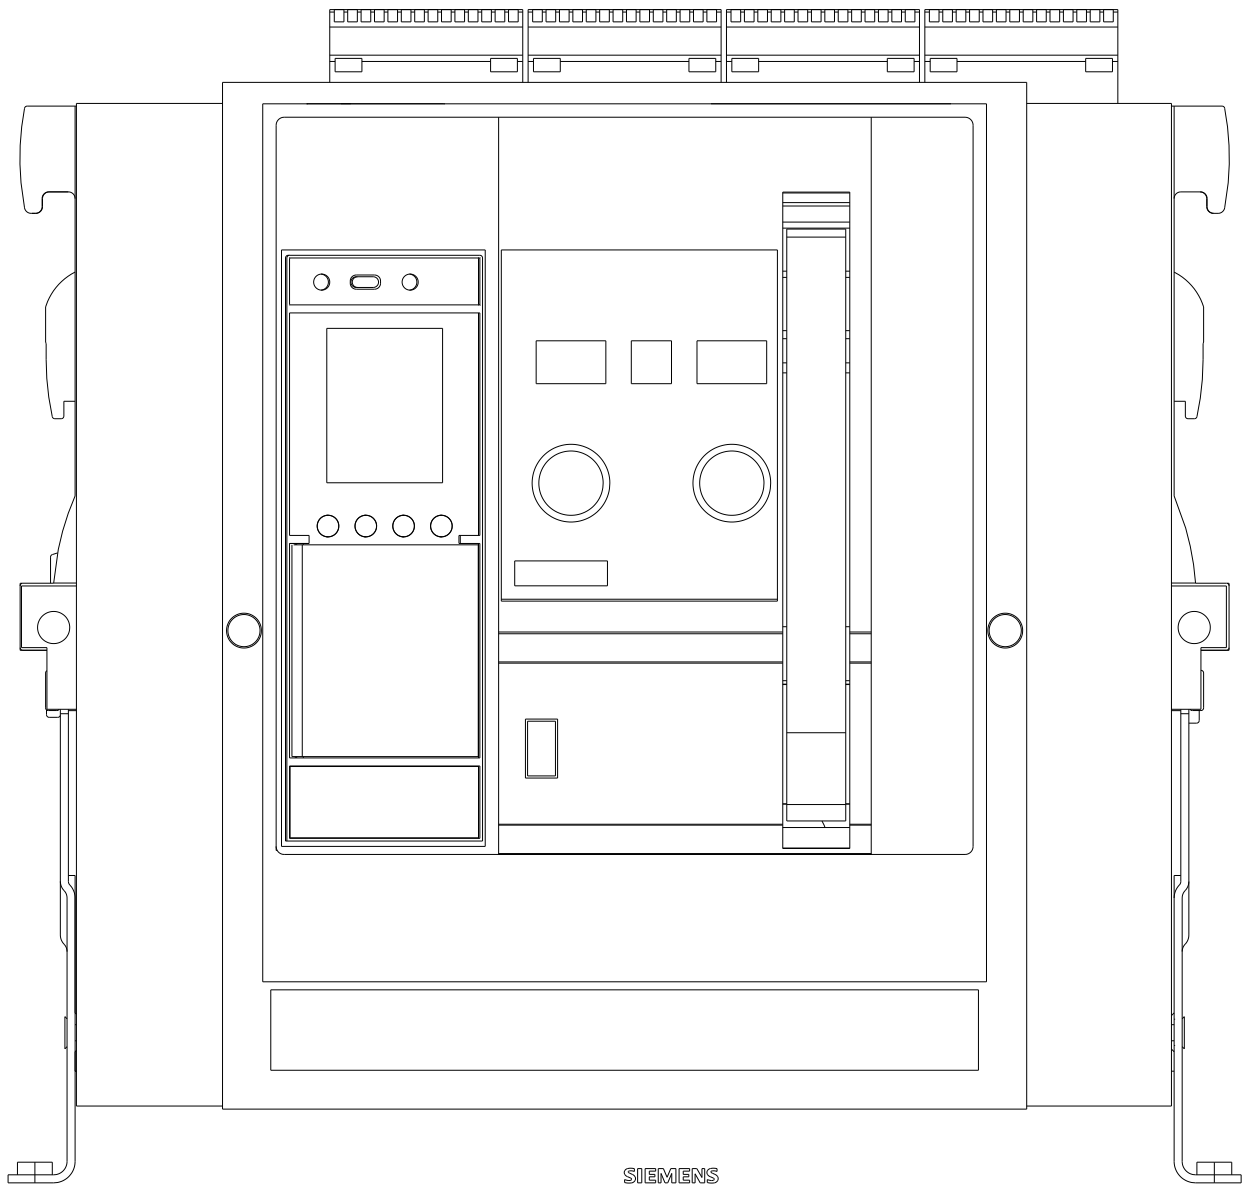

SIEMENS

