


Product datasheet

Specifications

Connection for vertical fixed NS, 3P 1250A, on Linergy LGY



LVS04485

EAN Code: 3606481867810

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Connection
product name	PrismaSeT PrismaSeT P enclosure
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASTA

Complementary

Cubicle-device connection	Linergy busbar
Poles description	3P
installation description	Cubicle - width 650 mm
Cubicle depth	400 mm: front 400 + 400 mm: rear
Installed device	ComPact: fixed NS630b...1000 - control: toggle vertical installation ComPact: fixed NS1250 - control: toggle vertical installation ComPact: fixed NS630b...1000 - control: direct front rotary handle vertical installation ComPact: fixed NS1250 - control: direct front rotary handle vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism vertical installation ComPact: fixed NS1250 - control: motor mechanism vertical installation
[I _e] rated operational current	1250 A
Busbar cross section	80 x 10 mm
Height	150 mm
Width	550 mm
Depth	300 mm
Product weight	6.9 kg
Quantity per set	Set of 1

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

functional unit	<p>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 3P 1 front connection on Canalis 17</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 3P 1 front connection on Canalis 17</p> <p>650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 3P 1 rear connection on Canalis 16</p> <p>650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 3P 1 rear connection on Canalis 16</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 front connection on Canalis 17</p> <p>650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 rear connection on Canalis 16</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 3P 1 front connection on Canalis 17</p> <p>650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 3P 1 front connection on Canalis 17</p> <p>650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 3P 1 rear connection on Canalis 16</p> <p>650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 3P 1 rear connection on Canalis 16</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 front connection on Canalis 17</p> <p>650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 rear connection on Canalis 16</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 3P 1 front connection on adaptor 14</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 3P 1 front connection on adaptor 14</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 front connection on adaptor 14</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 3P 1 front connection on adaptor 12</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 3P 1 front connection on adaptor 12</p> <p>650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 front connection on adaptor 12</p>
------------------------	--

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.500 cm
Package 1 Width	12.500 cm
Package 1 Length	54.000 cm
Package 1 Weight	6.702 kg
Unit Type of Package 2	P12
Number of Units in Package 2	28
Package 2 Height	38.000 cm
Package 2 Width	80.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	201.656 kg

Logistical informations

Country of origin	FR
--------------------------	----

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

EU RoHS Directive

[Compliant](#)

REACH Regulation

[Free of Substances of Very High Concern above the threshold](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture

End of life manual availability


No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

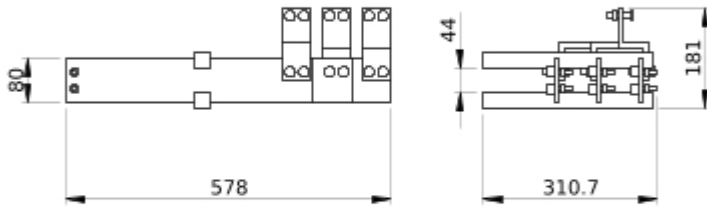

- All dimensions are approximate and are in mm
- Also see technical documentation.