

# RAD-ISM-2400-ANT-OMNI-9-0 - Antenna



2867623

<https://www.phoenixcontact.com/gb/products/2867623>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Omnidirectional antenna, 2.4 GHz, gain: 9 dBi, polarization: linear, opening angle: h/v 360°/15°, degree of protection: IP65, connection: N (female), incl. mounting bracket and mast clips

## Your advantages

- For medium distances
- For freely mobile applications
- For multipoint or mesh connections

## Commercial data

Item number	2867623
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNN2Z1
Product key	DNN2Z1
GTIN	4017918939007
Weight per piece (including packing)	850 g
Weight per piece (excluding packing)	853 g
Customs tariff number	85177100
Country of origin	PL

## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Product properties

Product type	Antenna
Gain	9 dBi
Vertical beamwidth	15 °
Horizontal beamwidth	360 °
Polarization	Linear vertical

### Electrical properties

Frequency band	2.4 GHz
Frequency range	2.4 GHz ... 2.5 GHz
Impedance	50 Ω
Voltage standing wave ratio VSWR in a 50 Ω system	≤ 2.00

### Connection data

#### Connection technology

Connection method	N (female)
Outside diameter	28 mm ... 47 mm (Mast)

### Dimensions

Width	25 mm
Height	625 mm

#### External dimensions

Outside diameter	28 mm ... 47 mm (Mast)
------------------	------------------------

### Material specifications

Material	Fiberglass-reinforced plastic
	Aluminum
	V2A

### Cable/line

Connecting cable	no
------------------	----

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 75 °C

# RAD-ISM-2400-ANT-OMNI-9-0 - Antenna



2867623

<https://www.phoenixcontact.com/gb/products/2867623>


Ambient temperature (storage/transport)	-40 °C ... 75 °C
---	------------------

## Mounting

Mounting type	Panel mounting
	Mast mounting

## Drawings

Schematic diagram

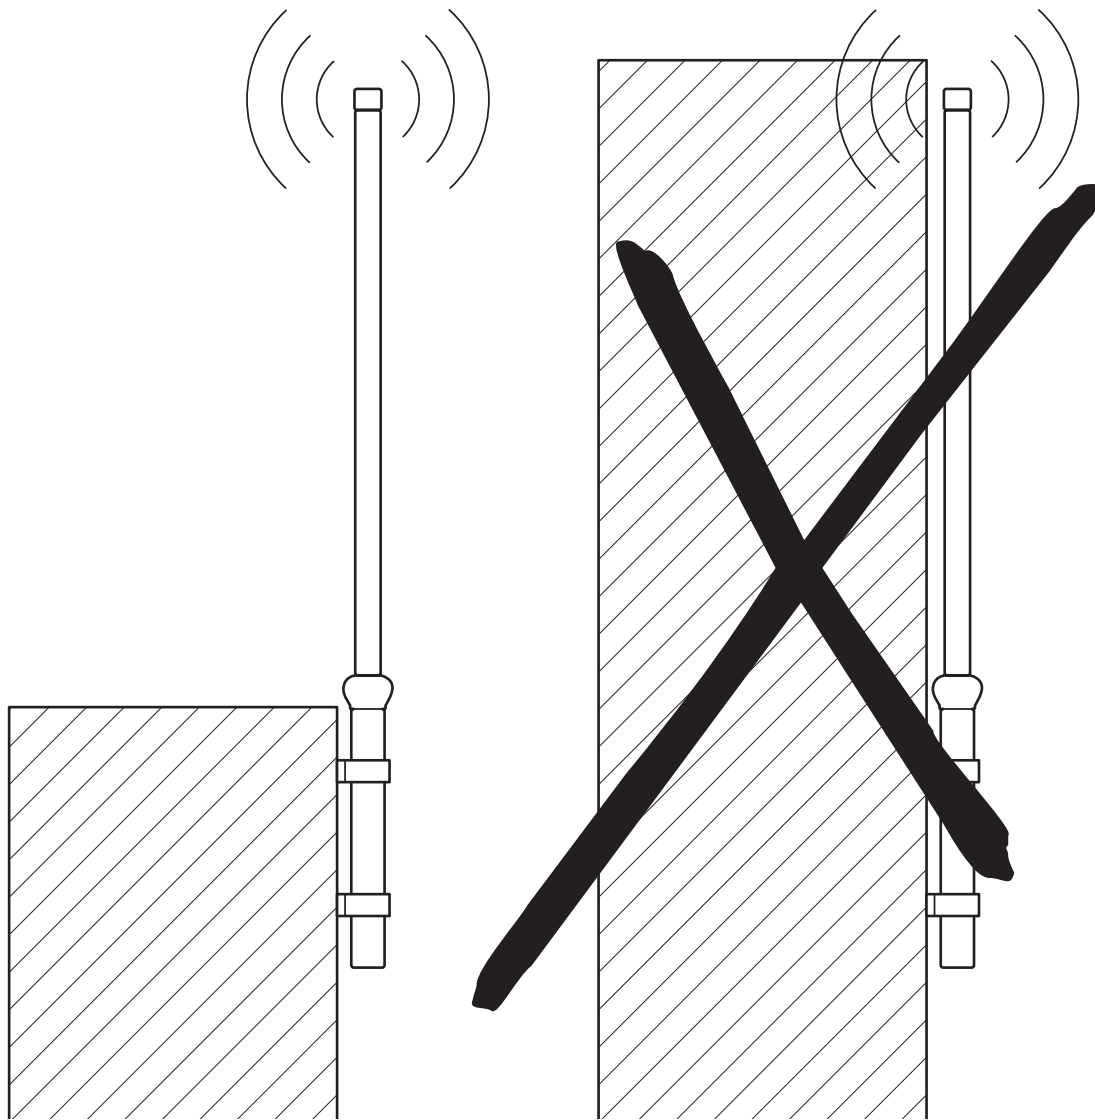


Mounting

2867623

<https://www.phoenixcontact.com/gb/products/2867623>

Schematic diagram

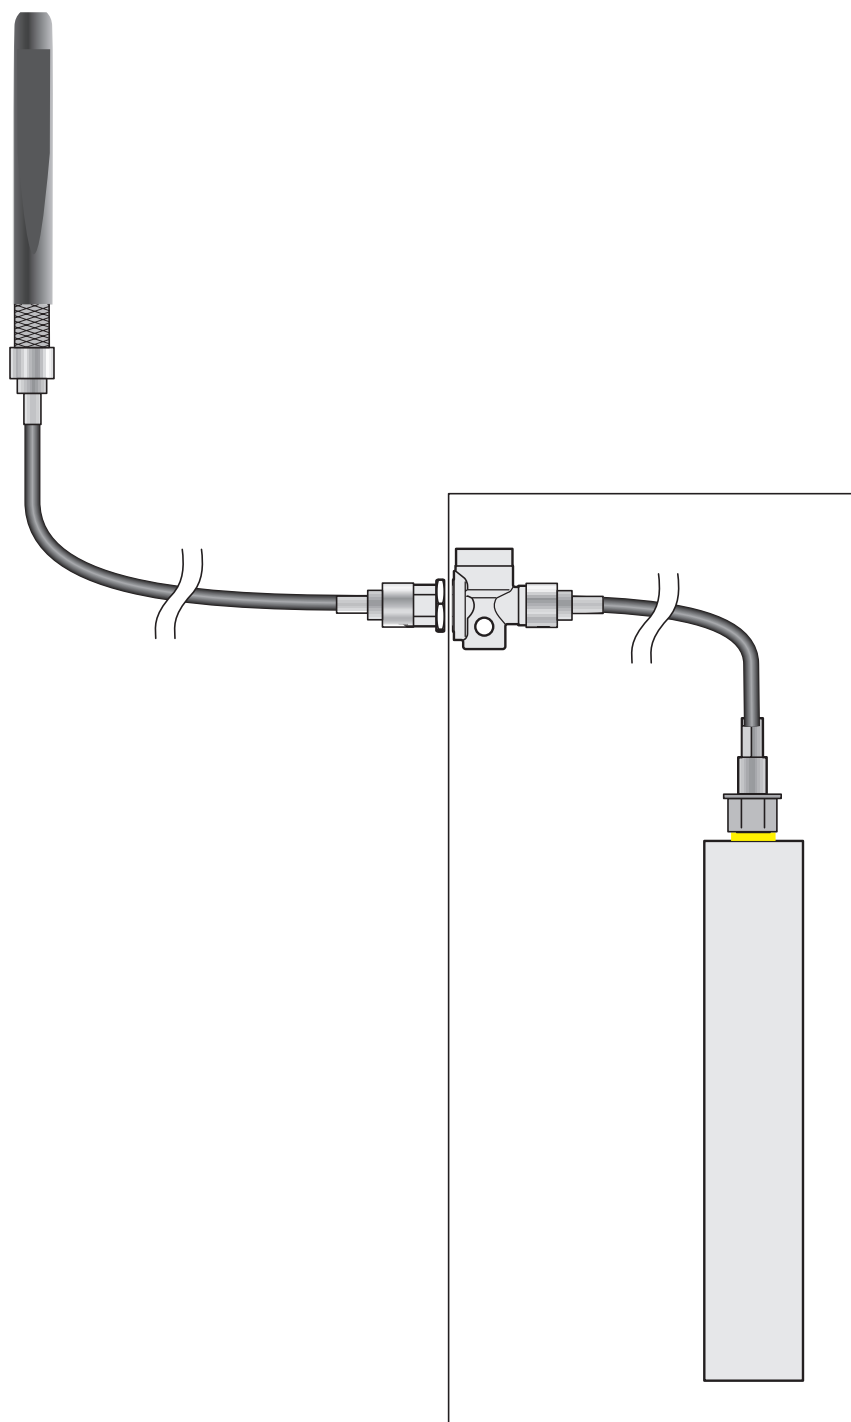

Installation example

# RAD-ISM-2400-ANT-OMNI-9-0 - Antenna



2867623

<https://www.phoenixcontact.com/gb/products/2867623>

## Classifications

### ECLASS

ECLASS-13.0	19070105
ECLASS-15.0	19070105

### ETIM

ETIM 10.0	EC001698
-----------	----------

### UNSPSC

UNSPSC 21.0	43223100
-------------	----------

2867623

<https://www.phoenixcontact.com/gb/products/2867623>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b4195123-53aa-4899-9f5d-bba4882d8f88

### EF3.1 Climate Change

CO2e kg	16.349 kg CO2e
---------	----------------

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)