

h-Coupler M12 Power male L-cod. / 2x female L-cod.

5-pol.

Art.No.: 7000-P4903-0000000

Weight: 0,140 kg

Country of origin: DE

Model designation: h-Stück M12Power male/2xfemale L-kod.

h-coupler

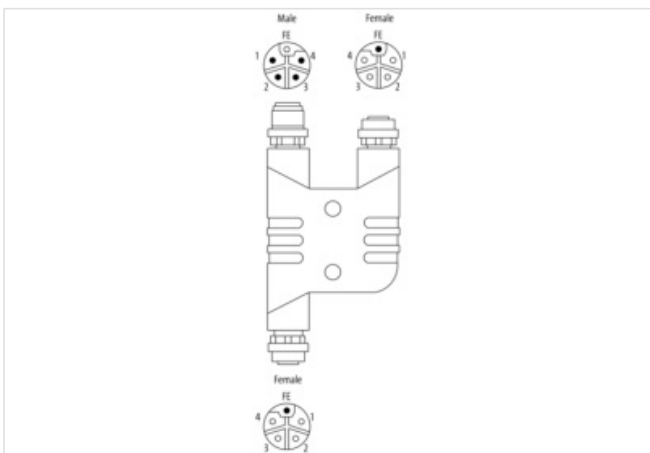
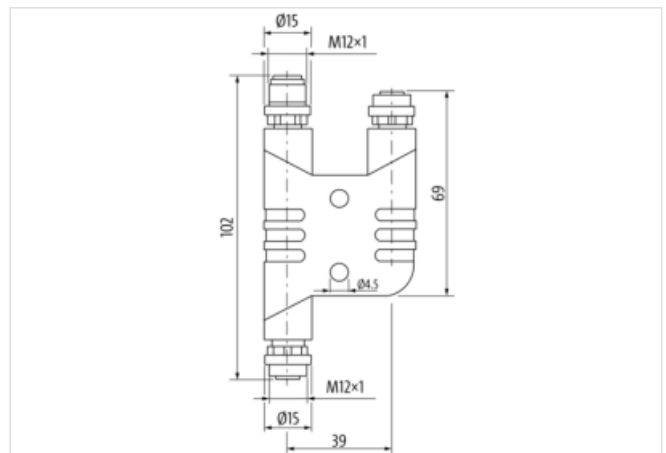
M12 Power

L-coded

4 + FE

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Side 1**

Family construction form

M12P

No. of poles	5
Coding	L
Width across flats	SW13
Material contact	Brass
Coating contact	gold plated
Degree of protection (EN IEC 60529)	IP67, IP68, IP65

Side 2

Family construction form	M12P
No. of poles	5
Coding	L
Material contact	Brass
Coating contact	gold plated
Degree of protection (EN IEC 60529)	IP67, IP68, IP65

Side 3

Family construction form	M12P
No. of poles	5
Coding	L
Material contact	Brass
Coating contact	gold plated
Degree of protection (EN IEC 60529)	IP67, IP68, IP65

Commercial data

URL Webshop	https://shop.murrelektronik.com/7000-P4903-0000000
GTIN	4048879840071
ECLASS-6.0	27279220
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-7.1	27440104
ECLASS-8.0	27440104
ECLASS-8.1	27440104
ECLASS-9.0	27440106
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440106
ECLASS-11.0	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC002061
ETIM-6.0	EC002061
customs tariff number	85366990
EAN	4048879840071
Packaging unit	1

Electrical data | Supply

Operating voltage DC max.	63 V
Current operating per contact max.	16 A

Diagnostics

Status indication LED	No
-----------------------	----

Installation | Connection

Tightening torque	0,6 Nm
Mounting set	M12 x 1

Device protection | Electrical

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-30

Murrelektronik Sp. z o.o. | al. Rożdżeńskiego 188H | 40-203 Katowice | Fon +48 32 730 00 20 | Fax +48 32 730 00 23 | shop@murrelektronik.pl | shop.murrelektronik.pl

Additional condition protection degree	inserted, screwed
--	-------------------

Pollution Degree	2
------------------	---

Mechanical data | Material data

housing	TPU
---------	-----

Mechanical data | Mounting data

Mounting method	inserted, screwed, Shaking protection
-----------------	---------------------------------------

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
----------------------------	--------

Operating temperature max.	90 °C
----------------------------	-------

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---

Conformity

Product standard	EN IEC 61076-2-111
------------------	--------------------