

# Product datasheet

Specifications



## Light Module, Harmony XV4, Ø40mm Modular Tower Light, Green Lens, Steady

XV4C23

EAN Code: 3606487130239

### Main

Range of product	Harmony XV4
Product or component type	Light module
Device composition	Standard lens
Device short name	XV4
Mounting diameter	40 mm
Signalling type	Steady
Light color	LED, green
Material	Polycarbonate
Product weight	0.035 kg
Mounting position	Upright/inverted

### Complementary

Service life in hours	50000 h
[Ue] rated operational voltage	24 V AC/DC
Rated operational voltage limits	21.6...26.4 V AC/DC
Current consumption	24 mA at 24 V AC 28 mA at 24 V DC
Inrush current	500 mA
Electrical shock protection class	Class II
[Ui] rated insulation voltage	50 V
[Uimp] rated impulse withstand voltage	500 V

### Environment

Pollution degree	2
Ambient air temperature for operation	-10...50 °C
Ambient air temperature for storage	-35...70 °C
IP degree of protection	IP65
Environmental Type ratings	Type 12
Vibration resistance	6 gn, amplitude = +/- 0.5 mm (f = 10...150 Hz) in operation
Shock resistance	20 gn (duration = 11 ms) for in operation
Standards	UL 60947-5-1 IEC 60947-5-1 CSA C22.2 No 60947-5-1

---

<b>Product certifications</b>	cULus CCC RCM UKCA CE
-------------------------------	-----------------------------------

## Packing Units

---

<b>Unit Type of Package 1</b>	PCE
-------------------------------	-----

---

<b>Number of Units in Package 1</b>	1
-------------------------------------	---

---

<b>Package 1 Height</b>	4.300 cm
-------------------------	----------

---

<b>Package 1 Width</b>	4.300 cm
------------------------	----------

---

<b>Package 1 Length</b>	6.500 cm
-------------------------	----------

---

<b>Package 1 Weight</b>	41.000 g
-------------------------	----------

---

<b>Unit Type of Package 2</b>	S02
-------------------------------	-----

---

<b>Number of Units in Package 2</b>	96
-------------------------------------	----

---

<b>Package 2 Height</b>	15.000 cm
-------------------------	-----------

---

<b>Package 2 Width</b>	30.000 cm
------------------------	-----------

---

<b>Package 2 Length</b>	40.000 cm
-------------------------	-----------

---

<b>Package 2 Weight</b>	4.250 kg
-------------------------	----------

## Logistical informations

---

<b>Country of origin</b>	DE
--------------------------	----

## Contractual warranty

---

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	8 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.6 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	7 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	<a href="#">Compliant By Exemption</a>
REACH Regulation	<a href="#">Reference contains Substances of Very High Concern above the threshold</a>

## Use Longer




### Lifetime extension

Repair	No
--------	----

## Use Again




### Repack and remanufacture

Recyclability potential, in %	80
End of life manual availability	<a href="#">End of Life Information</a>
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions


---

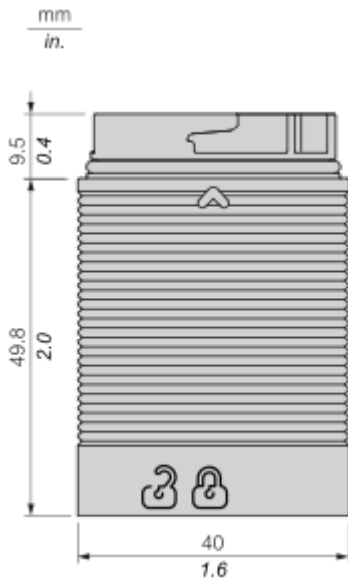

Mounting and Clearance

**Mounting Overview**

---

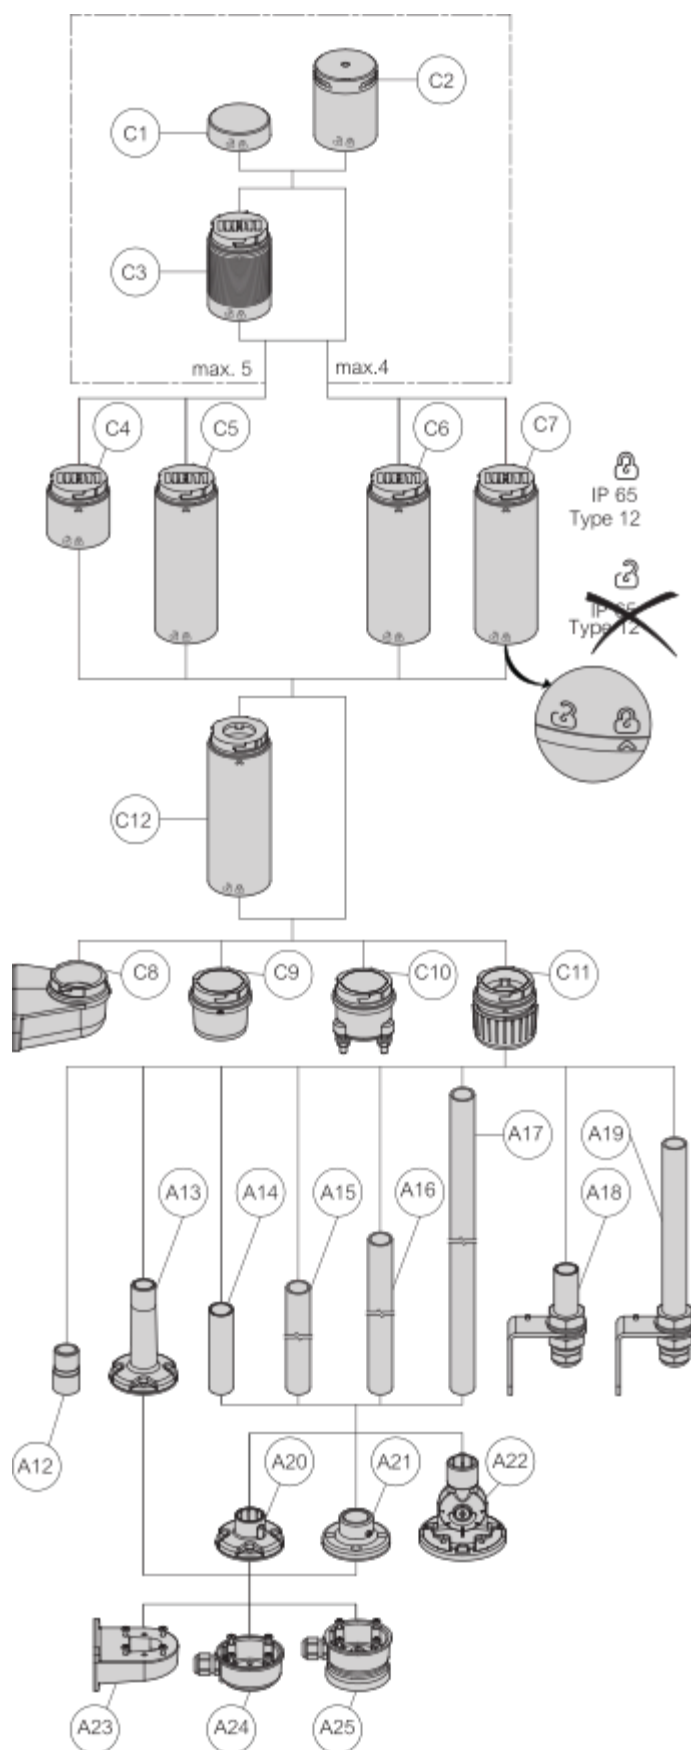

Configurations	Part Number	Part Description
----------------	-------------	------------------


C1, C4, C8	XV4C21BL	24V Base With Wall Mount & Cover
C1, C4, C9	XV4C21BG	24V Base Direct Mount & Cover
C1, C4, C10	XV4C21BP	24V Base With 3-Pin Adapter & Cover
C1, C4, C11	XV4C21BT	24V Base With Tube Adapter & Cover
C1, C5	XV4C21BFX	24V Blinking Base & Cover only
C1, C6	XV4C21MX	AC Base & Cover Without Adapter
C1, C7	XV4C21MFX	AC Blinking & Cover Without Adapter
C8	XV4C040	Wall Mount Adapter
C9	XV4C010	Direct Mount Adapter
C10	XV4C030	Direct Mount 3-Pin Adapter
C11	XV4C020	Tube Adapter
C12	XV4CT00	Body Extender
C2	XV4C9S	Buzzer 2 Tones
	XV4C9T	Buzzer 8 Tones
C3	XV4C2•	Steady Lens
	XV4C2•C	Steady Clear Lens
	XV4C5•	Blinking Lens
	XV4C29	Steady Clear Lens (Multi Colored)
A12	XVZ00	1/2" NPT Adapter
A13	XVZ02•	Plastic Fixing Plate With Pole
A14	XVZ100	Alu Ø25mm Pole 100mm Length
A15	XVZ250	Alu Ø25mm Pole 250mm Length
A16	XVZ400	Alu Ø25mm Pole 400mm Length
A17	XVZ800	Alu Ø25mm Pole 800mm Length
A18	XVZ100T	L Bracket Alu Ø25mm Pole 100mm
A19	XVZ250T	L Bracket Alu Ø25mm Pole 250mm
A20	XVZ01•	Plastic Fixing Plate
A21	XVZ11	Metal Fixing Plate

A22	XVZ06•	Plastic Foldable Bracket
A23	XVZ09	Plastic Wall Mount Bracket
A24	XVZ07	Side Entry Adapter
A25	XVZ08	Magnetic Adapter

Technical Illustration

Dimensions

---

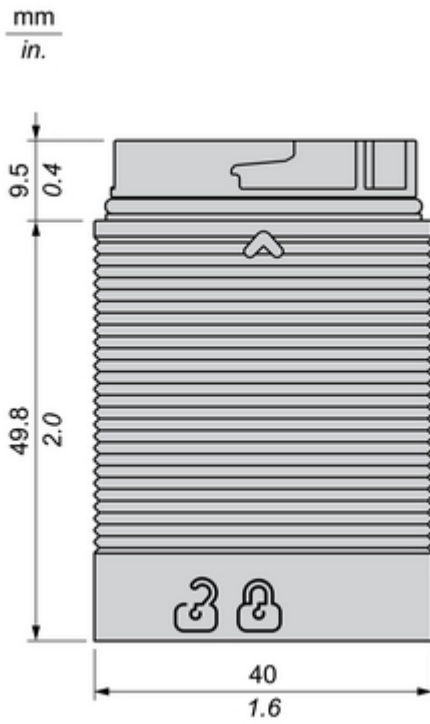

Offer Marketing Illustration

Product benefits / Features

---

## Technical Features

### Harmony XV4 Modular Tower Light

40mm tower light  
with modular  
construction

Rated up to IP65 for  
protection against  
dust and water

5 color, 4 clear and 1  
multi-color lens options



2 buzzer options  
with up to 95dB  
sound output

Comes in white  
body color

6 mounting styles  
including wall,  
magnetic and  
foldable styles

Offer Marketing Illustration

Product benefits / Features

---

### Modular Tower Light Harmony XV4



40mm modular tower light

Fit for harsh environments

Wide voltage compatibility with simplified base options

Modern design with minimum glare and high visibility

360° Omni sound buzzer options

Multiple mounting options for ease of use

Image of product / Alternate images

Alternative

---

