SIEMENS

Data sheet 3NA3252-4KK01

Figure similar

3NA COM LV HRC fuse link with measuring function size 2 In 315 A Un 400 V operational class gG with electronic module non-insulated grip lugs and front indicator please consider radio license! list of countries: see certificates

Model	
product brand name	SENTRON
product designation	LV HRC fuse link
design of the product	With metering function
design of an identification indicator	Front indicators
design of the switching contact	Non-corroding, silver-plated
design of the fuse link	LV HRC fuse link
General technical data	
size of fuse system according to EN 60269-1	NH2
operating class of the fuse link	gG
mounting type	non-insulated grip lugs
type of voltage of the operating voltage	AC
operational current at AC rated value	315 A
supply voltage	
● at AC	400 V
Protection class	
protection class IP	IP20, with connected conductors
Breaking Capacity	
breaking capacity at AC according to IEC 60269 rated value	100 kA
Dissipation	
power loss [W]	17.5 W
power loss [W] for rated value of the current at AC in hot operating state per pole	18 W
Mechanical Design	
height	149 mm
width	60 mm
width of the enclosure	60 mm
depth	72 mm
mounting position	Any, preferably vertical
Net Weight	0.71 kg
Environmental conditions	
ambient temperature during operation	
● minimum	-5 °C
● maximum	45 °C
ambient temperature during storage minimum	-10 °C
environmental category	-20 to +50 at 95% relative humidity
Certificates	
reference code according to IEC 81346-2	FC

Subject to change without notice
© Copyright Siemens

Approvals Certificates

Environment		General Product Approval			
Environmental Confirmations	Environmental Confirmations	VDE	EAC	Miscellaneous	Confirmation

General Product Approval		Radio Equipment Type Approval Certificate	Maritime application	other	
CE EG-Konf.	UKCA	Miscellaneous	DNV	Miscellaneous	Confirmation

other
产品合格 QC PASS

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3252-4KK01
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3NA3252-4KK01
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3252-4KK01
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Characteristic curves
https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod__no>

Subject to change without notice
© Copyright Siemens

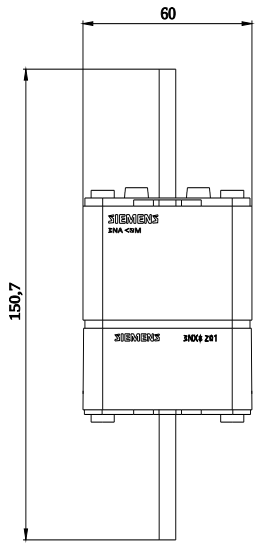



-F

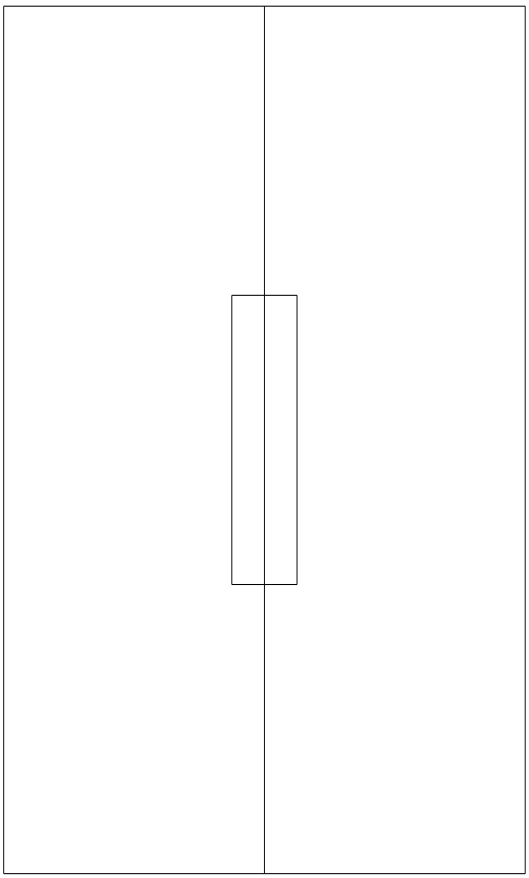

Subject to change without notice
© Copyright Siemens

FU



last modified: 1/16/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens