SIEMENS

Show actual product details

Data sheet 3VA2116-5HN42-0AC0

CIRCUIT BREAKER 3VA2 IEC FRAME 160 BREAKING CAPACITY CLASS M ICU=55KA @ 415 V 4POLE, LINE PROTECTION ETU350, LSI, IN=160A OVERLOAD PROTECTION IR=63A ...160A SHORT CIRCUIT PROTECTION ISD=1,5... 10 X IR, II=10 X IN NEUTRAL PROTECTION ADJUSTABLE(OFF,50%,100%) BUSBAR CONNECTION 2 AUXILIARY SWITCH

Certificates

Subject to change without notice
© Copyright Siemens AG

General Product Approval				EMC	Declaration of Conformity
CCC	VDE	sonstig		RCM	EG-Konf.

Test Certificates		Shipping Approval			
Typprüfbescheinigung/Werkszeugnis	sonstig	ABS	BUREAU VERITAS	GL	LRS

Shipping Approval	other
RMRS	sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2116-5HN42-0AC0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/3VA2116-5HN42-0AC0/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2116-5HN42-0AC0

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens AG

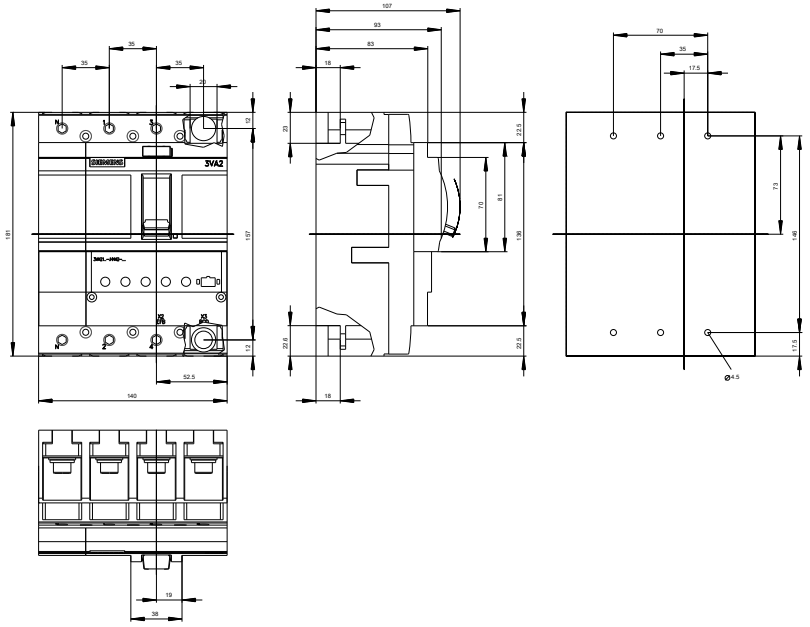

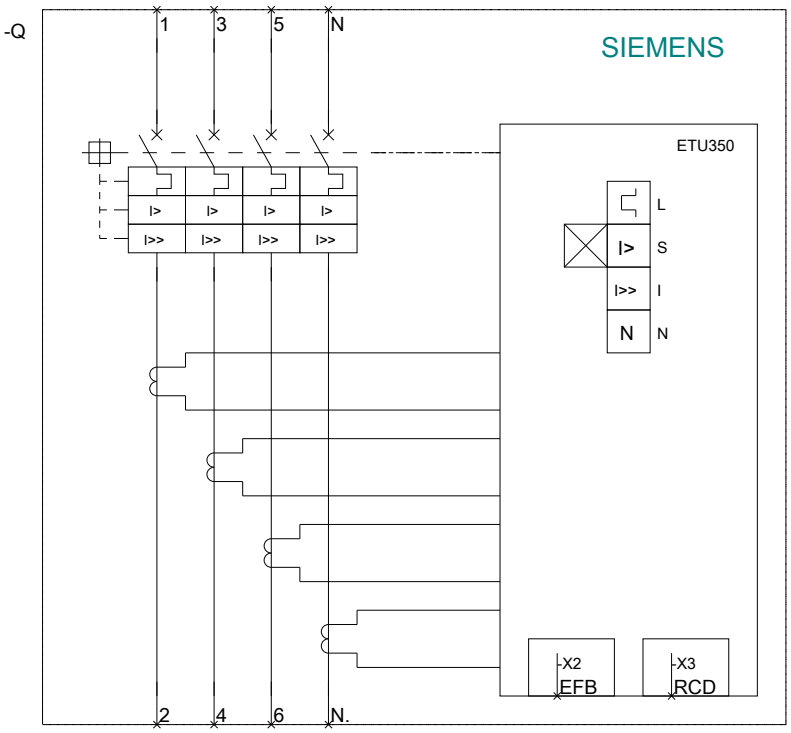

Subject to change without notice
© Copyright Siemens AG

last modified: 11/01/2016

Subject to change without notice
© Copyright Siemens AG