


Fixed-mounted circuit breaker 3-pole, Size 2, IEC
In=3200 A to 690 V, 50/60 Hz AC Icu=100 kA at 500 V
Rear horizontal connection

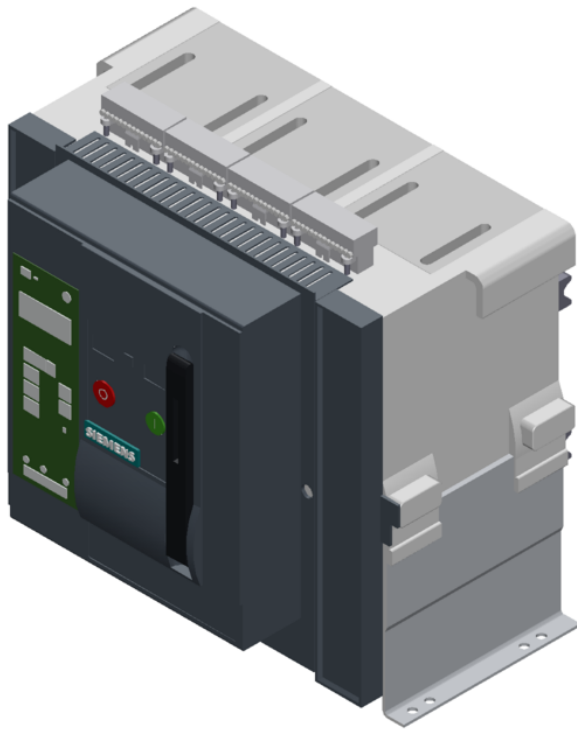

Model		
Product brand name		SENTRON
Product designation		ACB
Design of the auxiliary switch		2 NO + 2 NC
Design of the operating mechanism		Pushbutton
Type of the driving mechanism		Manual/motorized operating mechanism with mechanical and electrical closing
Type of the driving mechanism / motor drive		Yes
Design of the overcurrent release		ETU45B

General technical data		
Number of poles		3
Size of the circuit-breaker		2
Electrical endurance (switching cycles) / typical		15 000
Usage category		B
circuit-breaker / Design		3WL1232
Mechanical service life (switching cycles) / typical		15 000

Voltage		
Rated insulation voltage U_i	V	1 000

Protection class		
Protection class IP		IP41
Protective function of the overcurrent release		LSIN

Dissipation		
Power loss [W]		
<ul style="list-style-type: none"> for rated value of the current / at AC / in hot operating state / per pole 	W	136.7
<ul style="list-style-type: none"> maximum 	W	410

Electricity		
Operating current / at 45 °C / rated value	A	3 200
Continuous current / rated value	A	3 200
Adjustable pick-up value current		
<ul style="list-style-type: none"> of the current-dependent overload release / Full-scale value 	A	3 200
<ul style="list-style-type: none"> of instantaneous short-circuit trip unit / initial value 	A	4 800
<ul style="list-style-type: none"> of instantaneous short-circuit trip unit / Full-scale value 	A	38 400
Short-time current resistance (I_{cw})		
<ul style="list-style-type: none"> limited to 0.5 s / rated value 	kA	100
<ul style="list-style-type: none"> limited to 2 s / rated value 	kA	70
<ul style="list-style-type: none"> limited to 3 s / rated value 	kA	65

Main circuit

Operating frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Operating voltage		
• at AC / at 50/60 Hz / rated value	V	690
Operating current		
• at 40 °C / rated value	A	3 200
• at 50 °C / rated value	A	3 200
• at 55 °C / rated value	A	3 200
• at 60 °C / rated value	A	3 020
• at 65 °C / rated value	A	3 020
• at 70 °C / rated value	A	2 870

Auxiliary circuit

Number of NC contacts / for auxiliary contacts		2
Number of NO contacts / for auxiliary contacts		2

Suitability

Suitability for use		Plant / motor protection
----------------------------	--	--------------------------

Adjustable parameters

Adjustable pick-up value current		
• of the L-trip / with I4t characteristic / initial value	A	1 280
• of the L-trip / with I4t characteristic / Full-scale value	A	3 200
Adjustable pick-up value current / of the current-dependent overload release / initial value	A	1 280

Product details

Product component		
• Trip indicator		Yes
• Voltage trigger		Yes
• undervoltage release		Yes
Product extension / optional / motor drive		No

Product function

Product function		
• Ground fault protection		No
• Phase failure detection		Yes

Display and operation

Display version		without display
------------------------	--	-----------------

Short circuit

Operational short-circuit current breaking capacity (Ics)		
• at 415 V / rated value	kA	100

• at 500 V / rated value	kA	100
• at 690 V / rated value	kA	85
Maximum short-circuit current breaking capacity (I_{cu})		
• at 415 V / rated value	kA	100
• at 500 V / rated value	kA	100
• at 690 V / rated value	kA	85
• at 1000/1150 V / rated value	kA	50
Short-time current resistance (I_{cw}) / limited to 1 s / rated value	kA	85

Connections

Arrangement of electrical connectors / for main current circuit		Main terminal on the rear horizontal
Type of electrical connection / for main current circuit		busbar connection

Mechanical Design





Height	mm	440.5
Width	mm	460
Depth	mm	337
Mounting type		fixed mounting






Environmental conditions

Ambient temperature		
• during operation / minimum	°C	-20
• during operation / maximum	°C	70
• during storage / minimum	°C	-40
• during storage / maximum	°C	70

Certificates

Equipment marking		
• acc. to DIN EN 61346-2		Q
• acc. to DIN EN 81346-2		Q

General Product Approval		Declaration of Conformity	Test Certificates		Shipping Approval
 CCC	 VDE	 EG-Konf.	Special Test Certificate	Miscellaneous	 ABS

Shipping Approval					other
 BUREAU VERITAS	 GL	 LRS	 PRS	 RMRS	Environmental Confirmations

other
Miscellaneous

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1232-4EB32-4GS2-Z C20+C22+K07+S07+T40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1232-4EB32-4GS2-Z C20+C22+K07+S07+T40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1232-4EB32-4GS2-Z C20+C22+K07+S07+T40

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

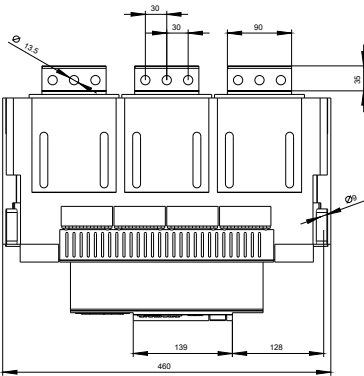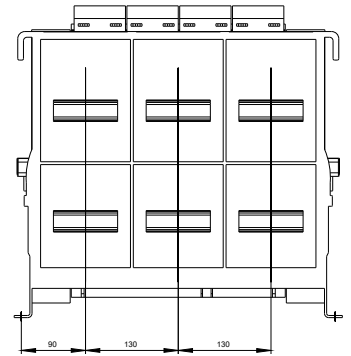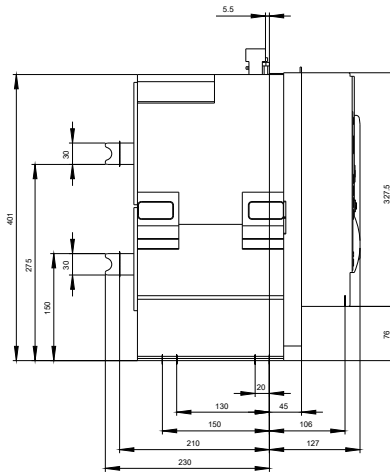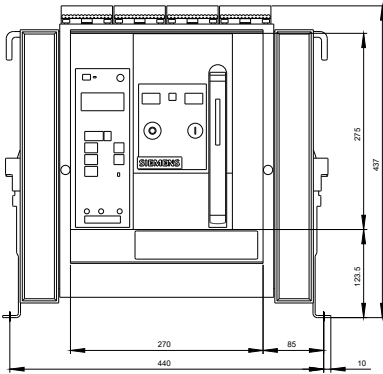

last modified:

01/22/2018