

Circular conductor terminal 2 cables 3 units Accessory for: 3VA1 250



Model	
Product brand name	SETRON
Product designation	accessories
Design of the product	circular conductor terminal




Connections according IEC	
IEC-marking / of terminals	25-150 mm ² CU/AL NNL
Connectable conductor cross-section	
<ul style="list-style-type: none"> • for copper cable / finely stranded / minimum • for copper cable / finely stranded / maximum • for copper cable / finely stranded / with core end processing / minimum • for copper cable / finely stranded / with core end processing / maximum • for copper cable / stranded / minimum • for copper cable / stranded / maximum • for aluminum cable / stranded / minimum • for aluminum cable / stranded / maximum 	25 mm ² 150 mm ² 25 mm ² 70 mm ² 25 mm ² 150 mm ² 25 mm ² 150 mm ²

Wire stripping length	25 / 50 mm
Tightening torque / when using copper cables	
• stranded	31
• finely stranded	31

Connections according UL

UL-marking / of terminals	TA2.3 CMC 4-300 CU7AL UR CSA
Permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
Wire stripping length	1.0 / 2.0 in
Connectable conductor cross-section	
• for copper cable / stranded / minimum	4 AWG
• for copper cable / stranded / maximum	300 kcmil
• for copper cable / finely stranded / minimum	4 AWG
• for copper cable / finely stranded / maximum	300 kcmil
• for copper cable / finely stranded / with core end processing / minimum	25
• for copper cable / finely stranded / with core end processing / maximum	70
• for aluminum cable / stranded / minimum	4 AWG
• for aluminum cable / stranded / maximum	300 kcmil
Tightening torque / when using copper cables	
• stranded	275 lb-in
• finely stranded	275 lb-in

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
Miscellaneous				Miscellaneous
	RCM	EG-Konf.	Type Test Certificates/Test Report	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)



<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9213-0JJ22>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9213-0JJ22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9213-0JJ22

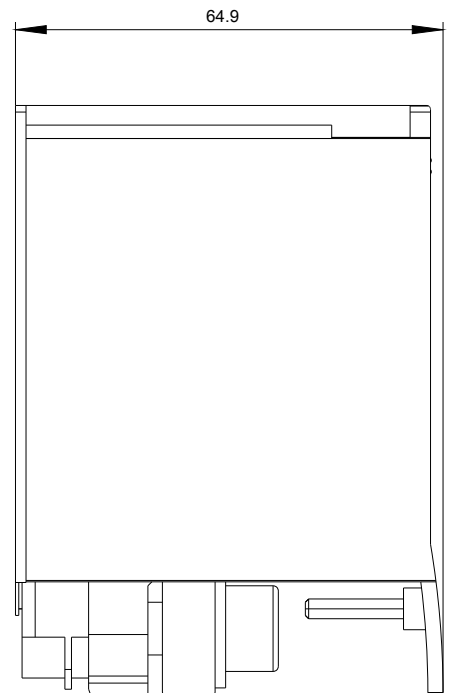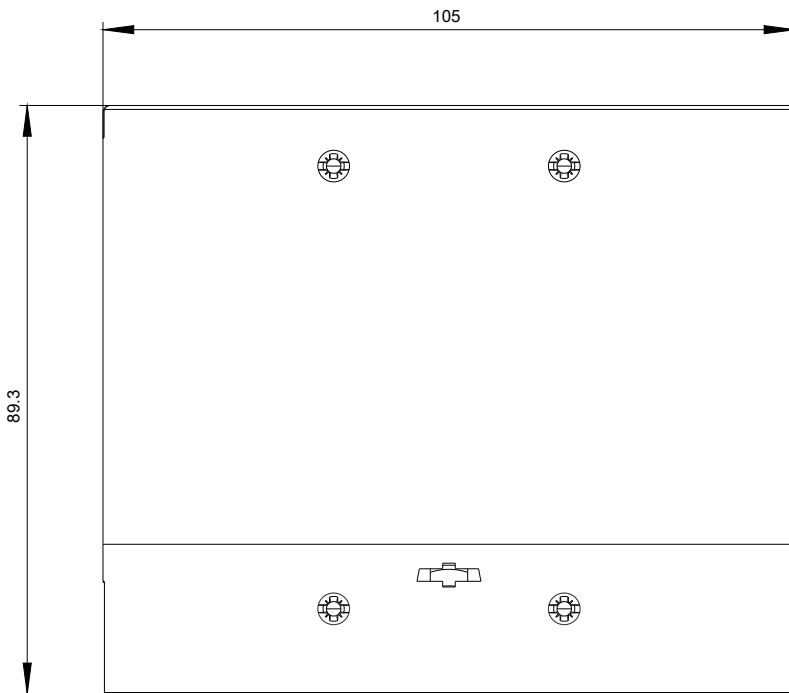

last modified:

07/02/2018