


AC2218



AS-Interface control cabinet module

SmartLine25 4AO (C) C IP20

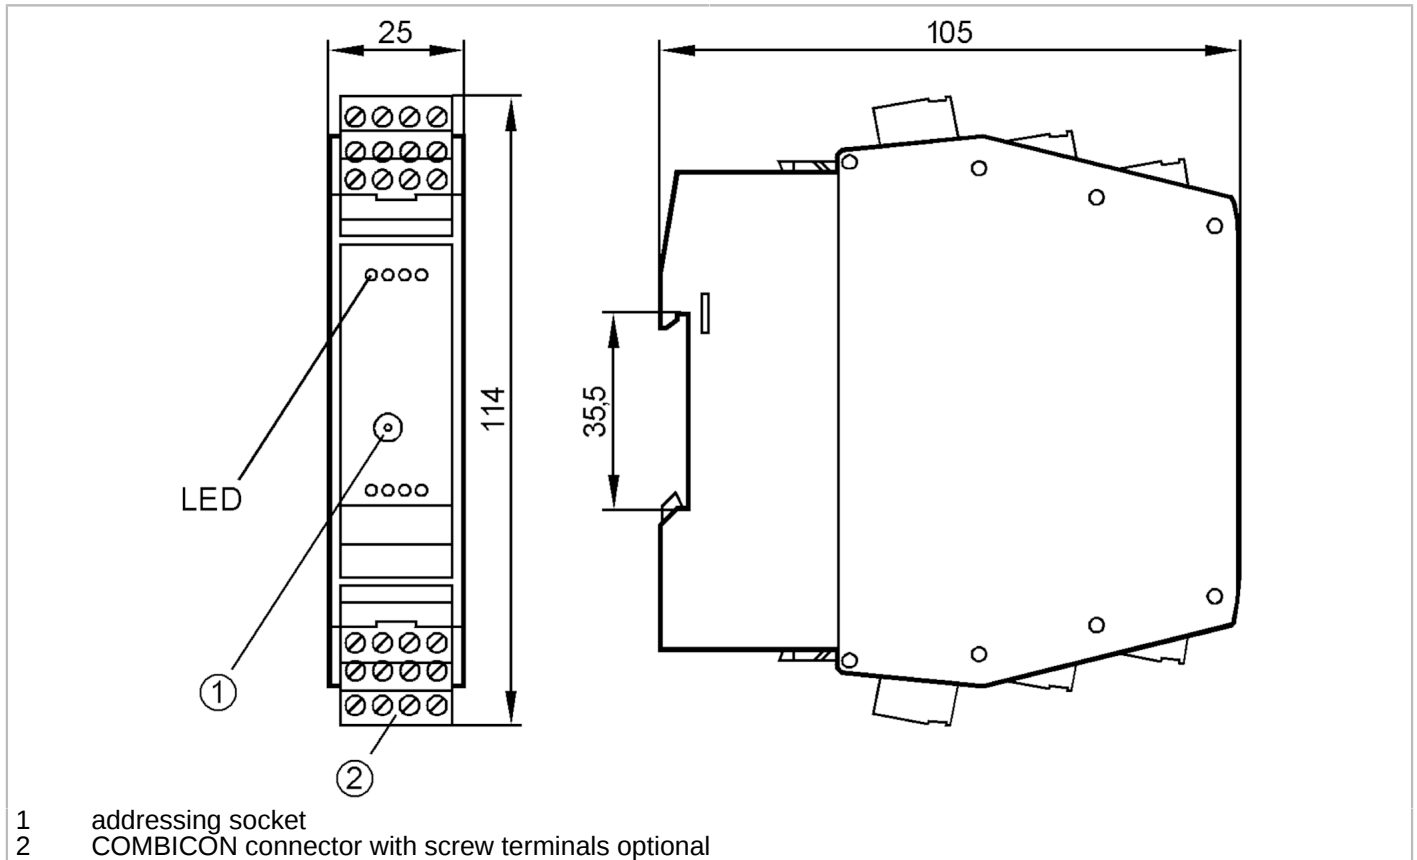

Electrical data		
Operating voltage	[V]	26.5...31.6 DC; ("supply class 2" to cULus)
Current consumption	[mA]	12...57; (external supply)
Max. current consumption from AS-i	[mA]	57; (with external supply: 25 mA)
Reverse polarity protection		yes
Max. current load total	[A]	0.5; (with external supply; with external supply: 100 mA)
Additional voltage supply	[V]	24 DC; (to PELV)
Outputs		
Number of analogue outputs		4; (Anschluss von 2-Draht-Aktuatoren oder 4-Draht-Aktuatoren mit separater 24 V-Versorgung)
Analogue current output	[mA]	0...20
Max. load	[Ω]	600
Overload protection		yes
Resolution of analogue output		16 (1 bit = 1μA)
Actuator supply analogue outputs		AS-i/external
Operating conditions		
Ambient temperature	[°C]	0...70
Storage temperature	[°C]	-20...85
Protection		IP 20

AC2218



AS-Interface control cabinet module

SmartLine25 4AO (C) C IP20

Tests / approvals							
EMC	EN 50295						
MTTF [years]	140						
AS-i classification							
AS-i profile	S-7.3.6						
AS-i I/O configuration [hex]	7						
AS-i ID code [hex]	3.6						
AS-i certificate pending	yes						
Assignment of the parameter bits	parameter bit	Designation					
	P0	not used	/ 1	reserved	/ 0	reserved	
	P1	not used	/ 1	reserved	/ 0	reserved	
	P2	peripheral fault indication	: 1	activated	/ 0	deactivated	
	P3	not used	/ 1	reserved	/ 0	reserved	
Mechanical data							
Weight [g]	173.5						
Type of mounting	mounting on DIN rail						
Materials	PA 6.6						
Displays / operating elements							
Display	operation				LED, green Voltage AS-i / 24 V AUX		
	errors				LED, red		
	function				LED, yellow channels 1...4		
Remarks							
Pack quantity	1 pcs.						



AS-Interface control cabinet module

SmartLine25 4AO (C) C IP20

Electrical connection

COMBICON:

Connection

O+	C1	O-	0V
O+	C2	O-	0V
O+	C3	O-	0V

0V	O-	C4	O+
A+	A-	E+	E-

O+	actuator supply +24V
C1...4	analogue output Current
O-	actuator supply 0V
0V	analogue output 0V
A+	AS-i +
A-	AS-i -
E+	external actuator supply +24V
E-	external actuator supply 0V