


E12510



Connecting cable with plug

ASTGH040ZDS0002H04

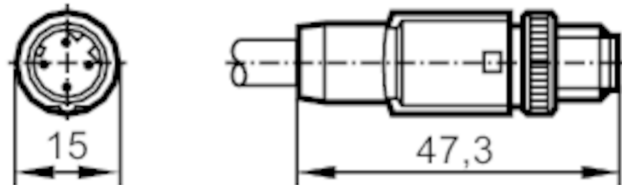

Application

Design Ethernet cable

Electrical data

Operating voltage [V] < 250 AC/DC
Max. current load total [A] 4

Operating conditions

Ambient temperature [°C] -40...70
Protection IP 67

Mechanical data

Weight [g] 162.6
Dimensions [mm] 15 x 15 x 47.3
Materials TPU
Material nut diecast zinc

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 2 m, PVC, green, Ø 6.5 mm; 4 x 0.34 mm²

Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

E12510




Connecting cable with plug

ASTGH040ZDS0002H04



Connection

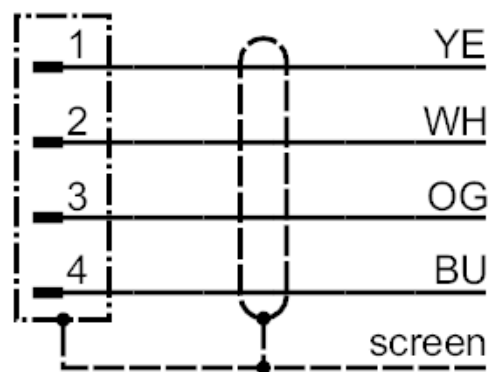

Core colours :

BU =

blue

OG =

orange

WH =

white

YE =

yellow