


DX2042



Multifunction display for monitoring analogue standard signals

DISPLAY/AX460/PNP OUT/AC/DC

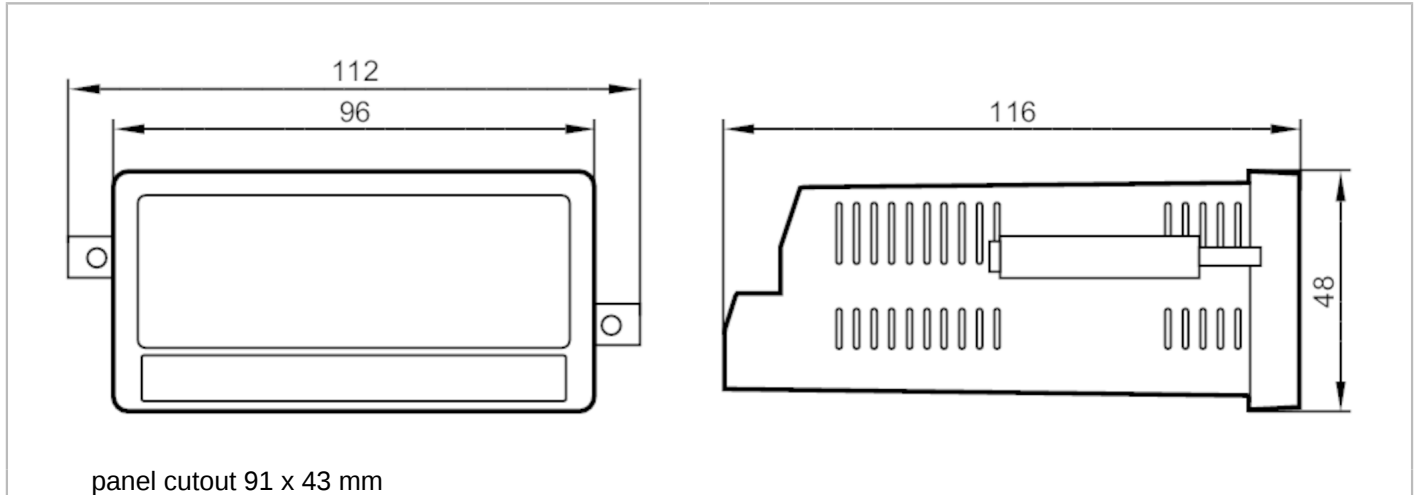

Application	
Application	displaying and monitoring analogue signals; e.g. pressure sensors, temperature sensors or flow sensors
Electrical data	
Frequency AC	[Hz] 50...60
Operating voltage	[V] 115...230 AC / 18...30 DC
Current consumption	[mA] 100
Inputs	
Number of analogue inputs	2
Outputs	
Number of digital outputs	4
Overload protection	yes
Detection zone	
Sensing range adjustable	no
Operating conditions	
Ambient temperature	[°C] -20...60
Storage temperature	[°C] -25...70
Protection	IP 65
Protection rating terminals	IP 20
Tests / approvals	
EMC	EN 61000-6-2
	EN 61000-6-3
	EN 61000-6-4
Mechanical data	
Weight	[g] 323.4
Type of mounting	panel cutout: 91 x 43 mm
Dimensions	[mm] 48 x 112 x 116
Materials	Noryl UL94-V-0

DX2042



Multifunction display for monitoring analogue standard signals

DISPLAY/AX460/PNP OUT/AC/DC


Displays / operating elements

Display colour display full graphic LCD display, touch screen

Electrical connection

screw terminals:

Connection

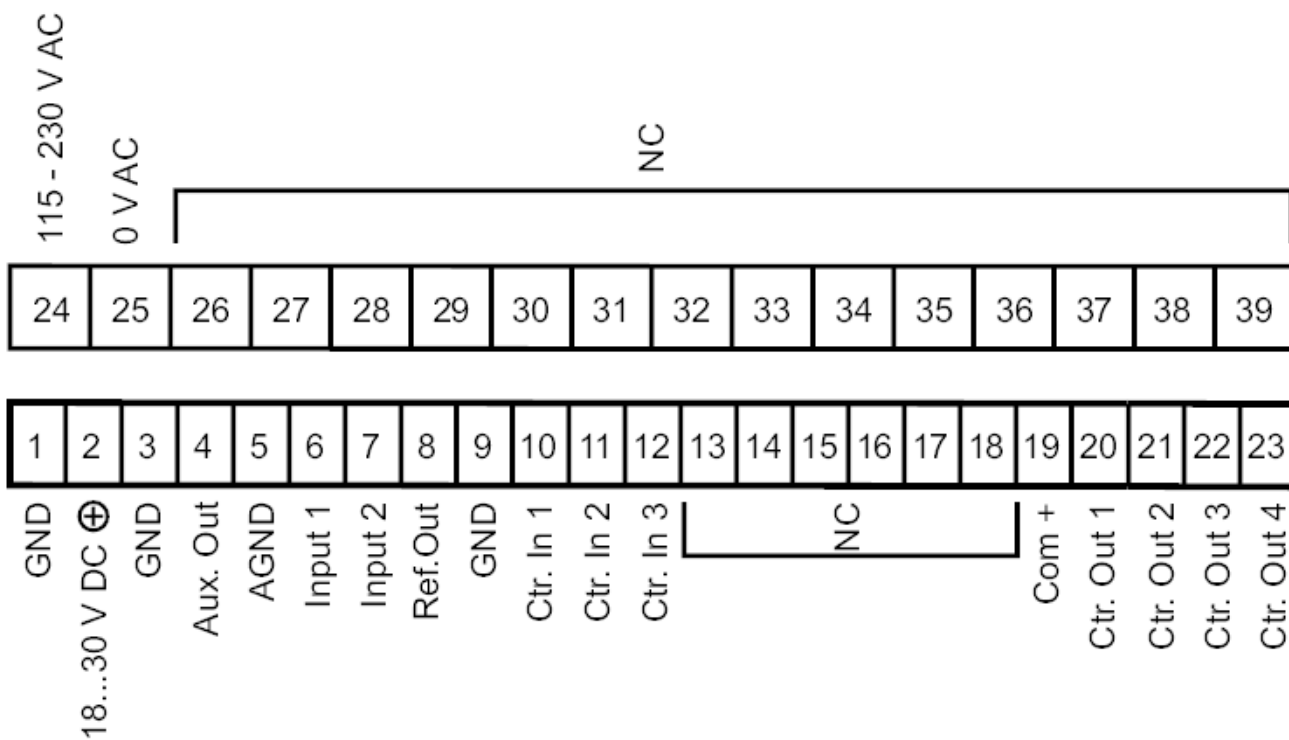

NC not used