


# OPU201



## Optical fork sensor

OPU-FPKG/AS

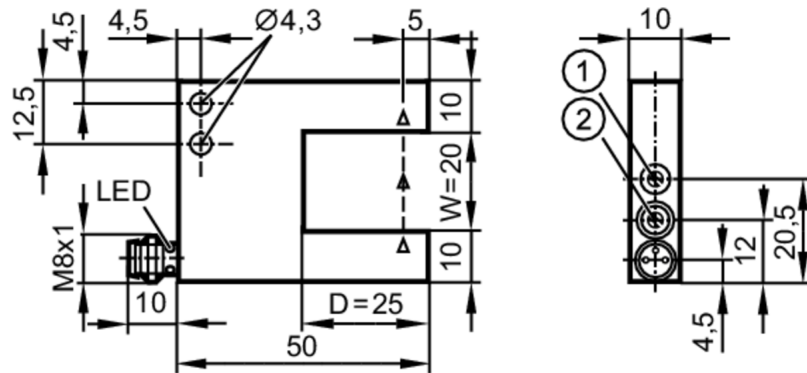

- 1 potentiometer sensitivity
- 2 output function switch



### Electrical data

Operating voltage	[V]	10...35 DC
Current consumption	[mA]	< 30
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660

### Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (selectable)
Max. voltage drop switching output DC	[V]	2.8
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	4000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

### Detection zone

Diameter of the smallest detectable object	[mm]	0.4
--	------	-----

### Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67

### Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	570

# OPU201



## Optical fork sensor

OPU-FPKG/AS


Mechanical data		
Weight	[g]	70.4
Dimensions	[mm]	40 x 10 x 50
Fork depth D	[mm]	25
Fork width W	[mm]	20
Materials		housing: diecast zinc black anodised; lens: glass

Displays / operating elements		
Display	switching status	1 x LED, yellow

Remarks	
Pack quantity	1 pcs.

### Electrical connection

Connector: 1 x M8



### Connection

