


# E73009



## wall passage

Wall passage stainless steel

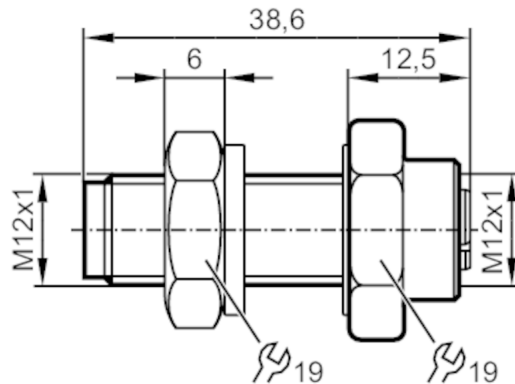

### Electrical data

Operating voltage	[V]	< 60 AC/DC
Max. current load total	[A]	8; (Pin 1+3: 4 A; Pin 2+4: 4 A)

### Operating conditions

Ambient temperature	[°C]	-40...85
Protection		IP 65; IP 67; IP 69K

### Mechanical data


Weight	[g]	29.4
Materials		stainless steel (1.4305 / 303); Sealing: EPDM
Tightening torque	[Nm]	1

### Remarks

Pack quantity		1 pcs.
---------------	--	--------


### Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: stainless steel (1.4305 / 303)



### Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: stainless steel (1.4305 / 303)



# E73009



## wall passage

Wall passage stainless steel

### Connection

