


# TM4341



## Temperature sensor with process connection

TM-150KFBN12- /US/

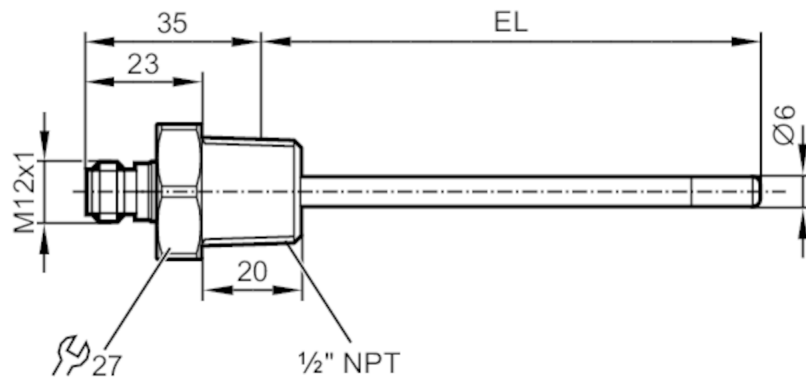

### Application

Measuring element	1 x Pt 100; (to DIN EN 60751, class A)	
Media	liquids and gases	
Pressure rating [bar]	160	
Minimum installation depth [mm]	15	

### Electrical data

Protection class	III	
------------------	-----	--

### Measuring/setting range

Probe length L [mm]	142	
Measuring range	-40...150 °C	-40...302 °F

### Accuracy / deviations

Accuracy [K]	$\pm (0,15 K + 0,002 \times  t )$	
--------------	-----------------------------------	--

### Response times

Dynamic response T05 / T09 [s]	1 / 3; (to DIN EN 60751)	
--------------------------------	--------------------------	--

### Operating conditions

Ambient temperature [°C]	-25...80	
Storage temperature [°C]	-40...100	
Protection	IP 68; IP 69K	

### Tests / approvals

Shock resistance	DIN EN 60068-2-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF [years]	22831	

### Mechanical data

Weight [g]	195.6	
Materials	stainless steel (1.4404 / 316L)	
Materials (wetted parts)	stainless steel (1.4404 / 316L)	
Process connection	threaded connection 1/2" NPT	
Probe diameter [mm]	6	
Installation length EL [mm]	150	

# TM4341



## Temperature sensor with process connection

TM-150KFBN12-

/US/

### Remarks

Remarks

operating voltage "supply class 2" according to cULus

The values for accuracy apply to flowing water.

Pack quantity

1 pcs.

### Electrical connection

Connector: 1 x M12; Contacts: gold-plated



### Connection

