


# AC2739



## AS-Interface PCB module

PCB 4DI 3DO T W

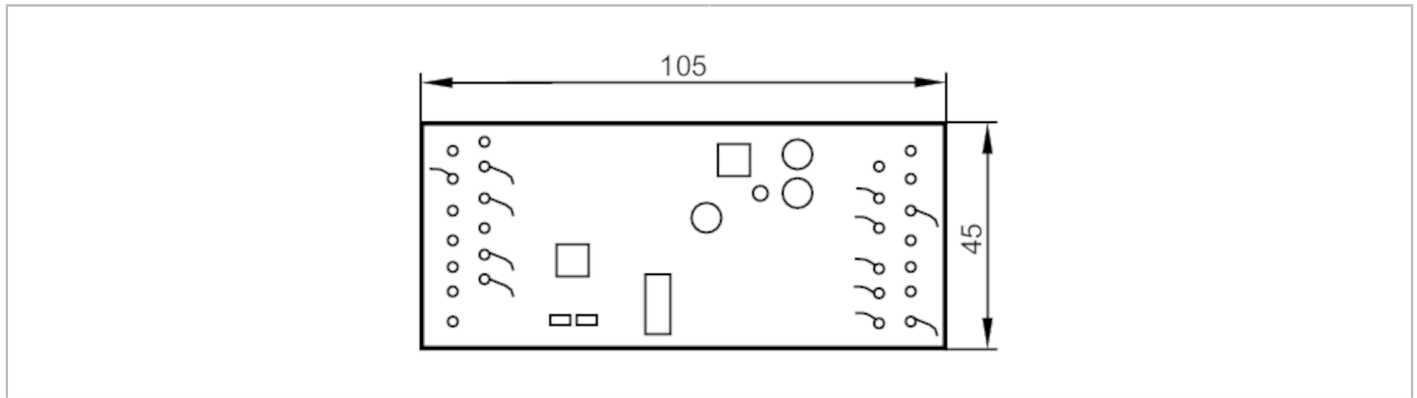

Electrical data	
Operating voltage [V]	26.5...31.6 DC
Current consumption [mA]	< 170
Max. current load total [A]	0.12
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 3
Inputs	
Number of digital inputs	4
Input circuit of digital inputs	PNP
voltage supply [V]	15...29
Input current High [mA]	> 3
Input current Low [mA]	< 1.5
Min. switching level high signal [V]	10
Digital inputs protected against short circuits	yes
Sensor supply of the inputs	AS-i
Outputs	
Number of digital outputs	3
Beschaltung	PNP
Max. current load per output [mA]	40
Short-circuit proof	yes
Electrically separated	yes
Operating conditions	
Ambient temperature [°C]	-25...60
Protection	IP 20
Tests / approvals	
EMC	EN 50295
MTTF [years]	329

# AC2739



## AS-Interface PCB module

PCB 4DI 3DO T W

AS-i classification		
AS-i version		3.0
Extended addressing mode possible		yes
AS-i profile		S-7.A.E
AS-i I/O configuration [hex]		7
AS-i ID code [hex]		A.E
AS-i certificate pending		yes
Mechanical data		
Weight [g]		115.5
Type of mounting		for Moeller housing RMQ-Titan: I3M, I4M, I6M
Displays / operating elements		
Display	operation	LED, green
Remarks		
Remarks	The PCB can also be integrated into an RMQ22 housing.	
	Do not connect any of the following points to an external potential:	
	O-, I+, I1, I2, I3, I4	
	The connections are electrically connected with the AS-i cable.	
Pack quantity	Install the unit so that exposed parts cannot be touched.	
	1 pcs.	

# AC2739




## AS-Interface PCB module

PCB 4DI 3DO T W

### Electrical connection

#### Connection

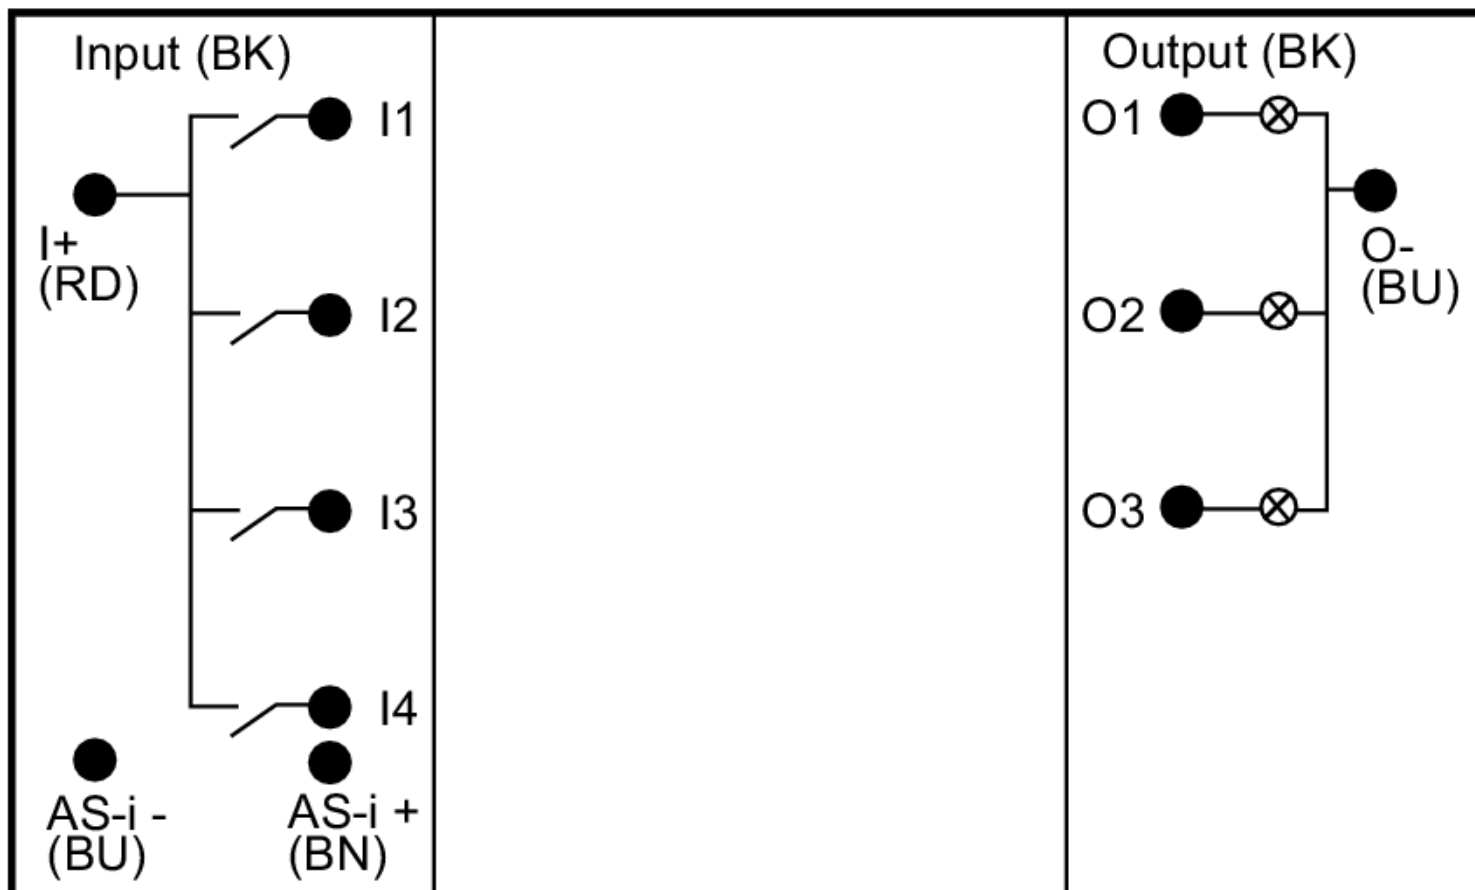

Core colours :

BN = brown  
BU = blue  
BK = black  
RD = red