

# RA6015




## Incremental encoder with hollow shaft

RA-0500-I24/N2

Status Archive

/RA3101 + EVC544

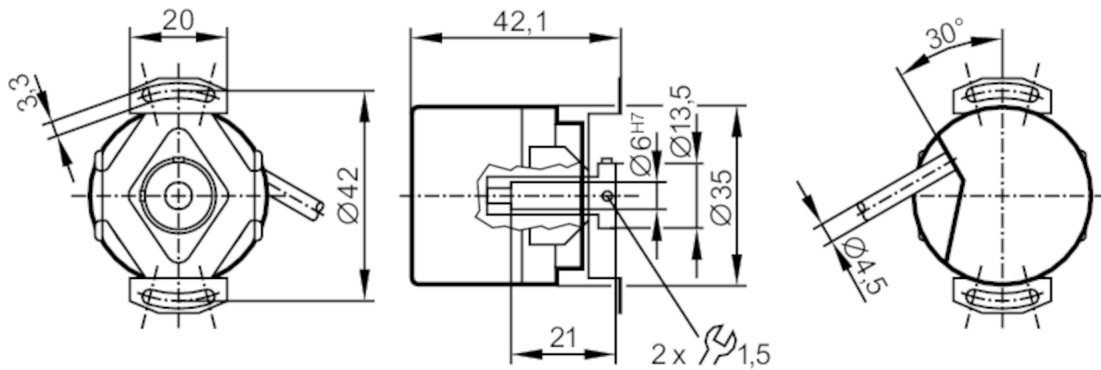

### Application

Function principle incremental

### Electrical data

Operating voltage [V] 10...30 DC  
 Current consumption [mA] 150

### Outputs

Electrical design HTL  
 Max. current load per output [mA] 50  
 Switching frequency [kHz] 160  
 Type of short-circuit protection < 60 s  
 Phase difference A und B [°] 90

### Measuring/setting range

Resolution 500 resolution

### Operating conditions

Ambient temperature [°C] -40...70  
 Note on ambient temperature for firmly laid cable  
 Max. relative air humidity [%] 75; (briefly: 95 %)  
 Protection IP 64

### Tests / approvals

Shock resistance 100 g (6 ms)  
 Vibration resistance 10 g (55...2000 Hz)  
 MTTF [years] 114

# RA6015



## Incremental encoder with hollow shaft

RA-0500-I24/N2

Mechanical data	
Weight [g]	235.4
Dimensions [mm]	Ø 35 / L = 42.1
Materials	aluminium
Max. revolution, mechanical [U/min]	10000
Max. starting torque [Nm]	2.5
Reference temperature torque [°C]	20
Shaft design	hollow shaft open to one side
Shaft diameter [mm]	6
Shaft fit	H7
Shaft material	steel (1.4104)
Installation depth of shaft [mm]	6...21
Max. axial shaft misalignment [mm]	0,5

Remarks	
Notes	discontinued article

### Electrical connection

Cable: 2 m, PUR; radial, can also be used axially

brown	A
green	0 V A
grey	B
pink	0 V B
red	0 index
black	0 V 0 index
brown/green	L+ (Up)
white/green	L- 0V (Un)
lilac	failure inverted
screen	housing

### Diagrams and graphs

Pulse diagram	<p>Output A Output B 0 index</p>
---------------	--

Status Archive

/RA3101 + EVC544