




## Inductive sensor

IG-3008-APKG/7M

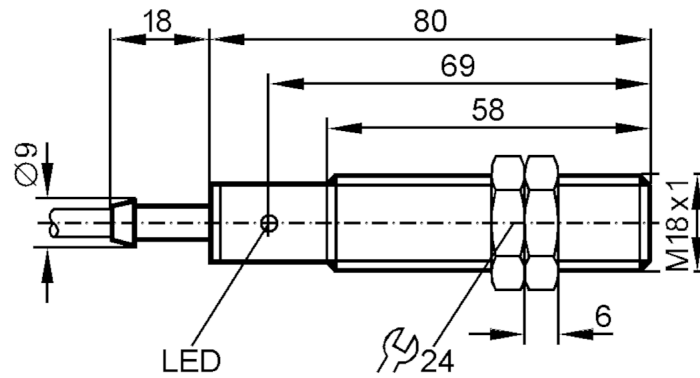

**EAC**

### Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes

### Outputs

Electrical design		PNP
Output function		normally closed
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

### Detection zone

Sensing range	[mm]	8
Real sensing range $S_r$	[mm]	$8 \pm 10\%$
Operating distance	[mm]	0...6.5

# IG5947



## Inductive sensor

IG-3008-APKG/7M

Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2	
Hysteresis [% of Sr]	1...15	
Switch point drift [% of Sr]	-10...10	
Operating conditions		
Ambient temperature [°C]	-25...80	
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]	1844	
Mechanical data		
Weight [g]	375	
Housing	threaded type	
Mounting	non-flush mountable	
Dimensions [mm]	M18 x 1	
Thread designation	M18 x 1	
Materials	PBT	
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)	lock nuts: 2	
	rubber washers: 2 x 24 x 18 x 1	
Remarks		
Pack quantity	1 pcs.	

# IG5947




## Inductive sensor

IG-3008-APKG/7M

### Electrical connection

Cable: 7 m, PVC; 3 x 0.5 mm<sup>2</sup>

### Connection

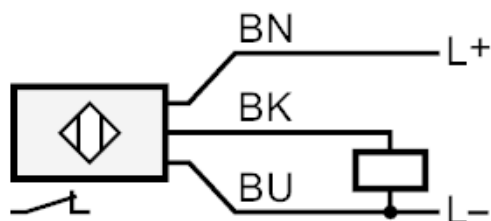

Core colours :

BN = brown  
BU = blue  
BK = black