


E21139



Ethernet connection cable

VSTGN040ZDS0005L04STGN04ZDS

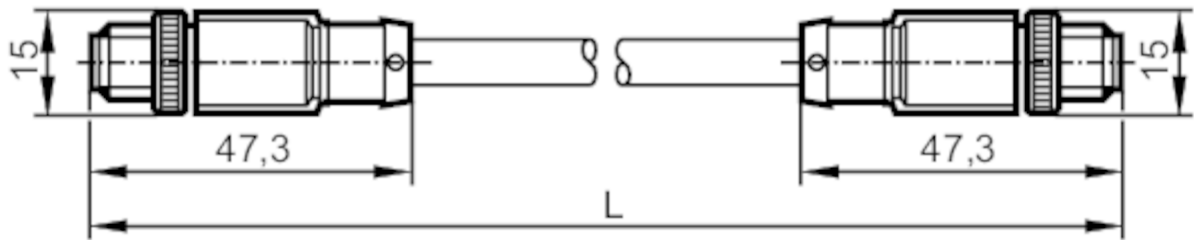

Application

Design Ethernet cable

Electrical data

Operating voltage [V]	< 50 AC / < 60 DC
Protection class	III
Max. current load total [A]	4

Operating conditions

Ambient temperature [°C]	-20...90
Protection	IP 67

Mechanical data

Weight [g]	378.6
Dimensions [mm]	15 x 15 x 47.3
Materials	TPU
Material nut	diecast zinc / diecast zinc

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 5 m, PVC, green, shielded; 4 x 0.34 mm²

Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

Connector: 1 x M12, straight; Moulded body: TPU; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: screen connected

E21139



Ethernet connection cable

VSTGN040ZDS0005L04STGN04ZDS



Connection

