


E2M250



MultiViewBox

MULTIVIEWBOX/4 PORT

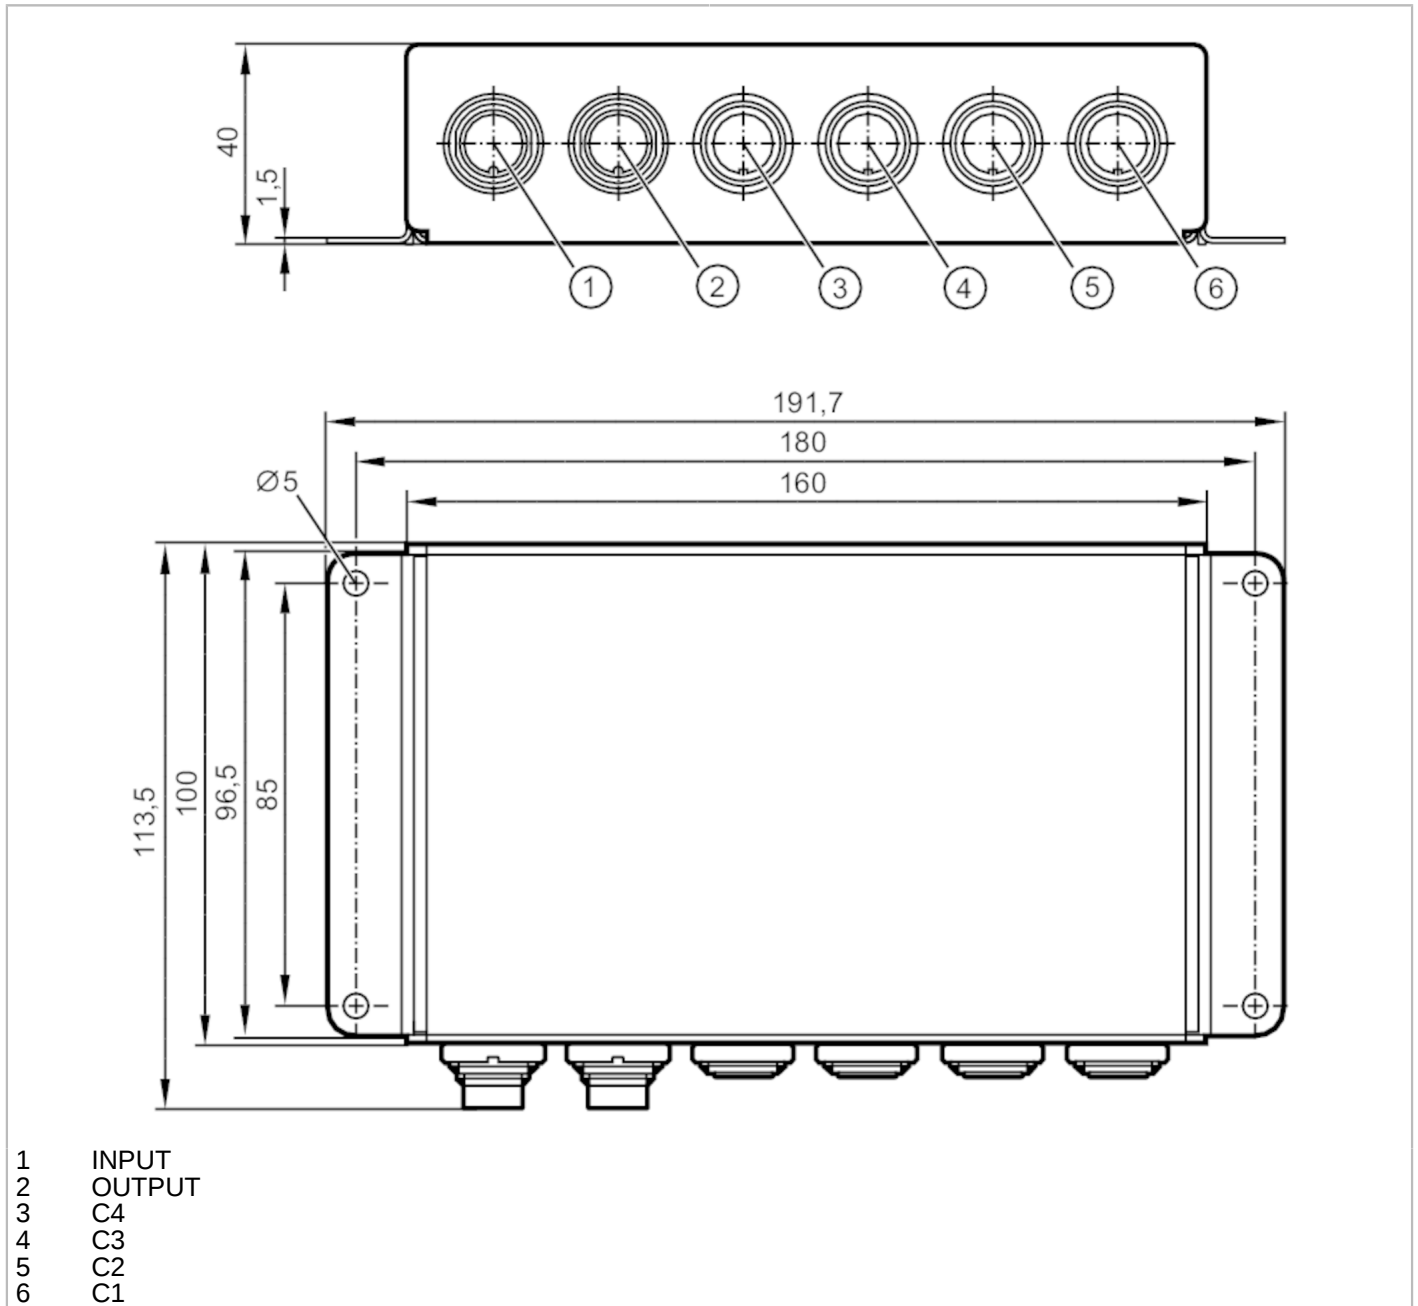

Electrical data

Operating voltage	[V]	10...32 DC
Current consumption	[mA]	< 770
Overvoltage protection		yes

Detection zone

Image resolution	[pixels]	680 x 480
------------------	----------	-----------

Operating conditions

Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-40...85
Protection		IP 67; (ISO 20653)

E2M250



MultiViewBox

MULTIVIEWBOX/4 PORT

Tests / approvals		
EMC	DIN EN 61000-6-4	industrial environments
	DIN EN 61000-6-2	industrial environments
Shock resistance		50 g
Vibration resistance	Frequency range 24...2000 Hz	
	(15.3 x 9.81 m/s ²)rms	PSD (g ² /Hz)
	0.04...0.1	

Mechanical data	
Weight [g]	1595
Materials	housing: stainless steel (1.4401 / 316)

Accessories	
Accessories (supplied)	Protective covers

Remarks	
Pack quantity	1 pcs.

Electrical connection - C1...C4

- | | |
|---|------------------------------|
| 1 | coax cable core video signal |
| 2 | coax screen video GND |
| 3 | U+ |
| 4 | 0 V |

Connector: 4 x M16



Electrical connection - INPUT

- | | |
|---|----------|
| 1 | U+ |
| 2 | 0 V |
| 3 | input 1 |
| 4 | input 2 |
| 5 | input 3 |
| 6 | input 4 |
| 7 | not used |
| 8 | not used |


Connector: 1 x M16

E2M250



MultiViewBox

MULTIVIEWBOX/4 PORT



Electrical connection - OUTPUT

1	coax cable core video signal
2	coax screen video GND
3	not used
4	not used

Connector: 1 x M16

