


IZ5044



Inductive sensor

IZB30,8-BPKG/V2A/0,3M/AS-610-T

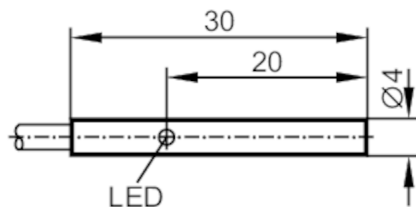

Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		III
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Sensing range	[mm]	0.8
Real sensing range S_r	[mm]	$0.8 \pm 10\%$
Operating distance	[mm]	0...0.65
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[% of S_r]	1...15
Switch point drift	[% of S_r]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 65
Tests / approvals		
EMC		EN 60947-5-2
		EN 55011 class B
MTTF	[years]	953

IZ5044



Inductive sensor

IZB30,8-BPKG/V2A/0,3M/AS-610-T

Mechanical data	
Weight [g]	18.8
Housing	cylindrical
Mounting	flush mountable
Dimensions [mm]	Ø 4 / L = 30
Materials	stainless steel (1.4305 / 303); POM

Displays / operating elements		
Display	switching status	1 x LED, yellow

Electrical connection	
Connection	plug

Accessories	
Accessories (supplied)	Mounting clamps: 1

Remarks	
Pack quantity	1 pcs.

Electrical connection - plug

Cable: 0.3 m, PUR

Connector: 1 x M8; Locking: snap-fit



Connection

