


# E10420



## Connecting cable with socket

ADOGH040MSS0015G04

Status Archive

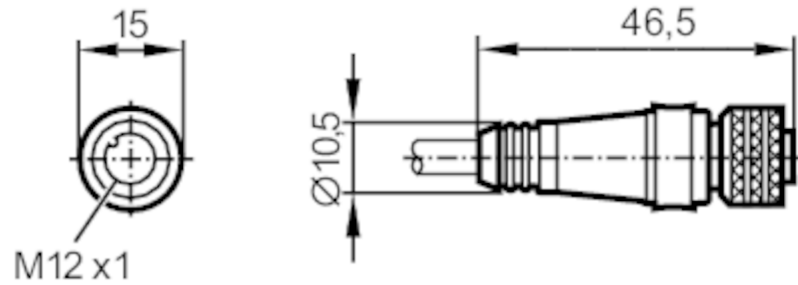

### Electrical data

Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Max. current load total	[A]	4

### Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 67

### Mechanical data

Weight	[g]	578.8
Dimensions	[mm]	15 x 15 x 46.5
Materials		TPU
Material nut		brass

### Remarks

Pack quantity		1 pcs.
---------------	--	--------

### Electrical connection

Cable: 15 m, PVC, black, Ø 5 mm, shielded; 4 x 0.25 mm<sup>2</sup> (32 x Ø 0.1 mm )

### Electrical connection - socket


Connector: 1 x M12, straight; Moulded body: TPU; Locking: brass, nickel-plated; Tightening torque: 0.5 Nm; Shielded connection cable: screen not connected

# E10420




## Connecting cable with socket

ADOGH040MSS0015G04



### Connection

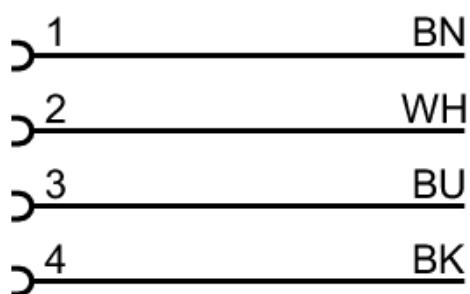

Core colours :

BN = brown  
BK = black  
BU = blue  
WH = white

Status Archive