


# RU6001



## Incremental encoder with solid shaft

RU-0050-I24/L2

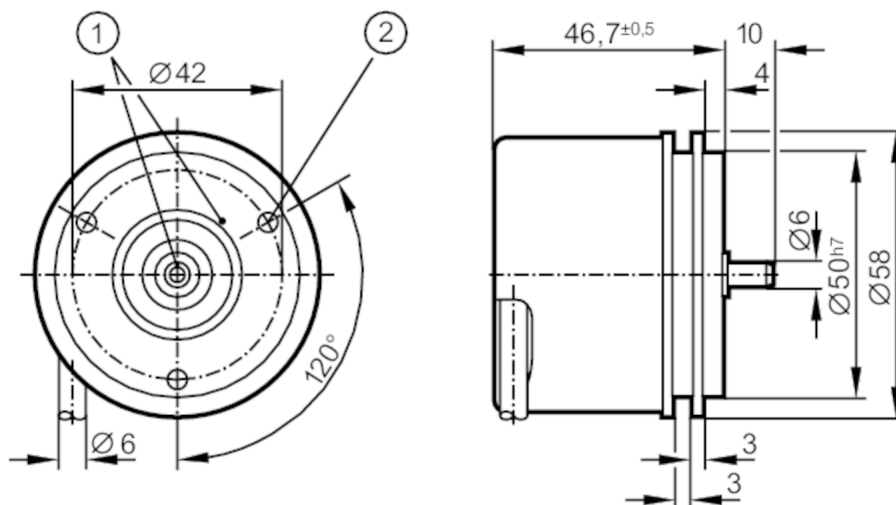

- 1 reference mark
- 2 M4 Depth 5 mm



### Application

Function principle incremental

### Electrical data

Operating voltage [V] 10...30 DC  
 Current consumption [mA] < 150

### Outputs

Electrical design HTL  
 Max. current load per output [mA] 50  
 Switching frequency [kHz] 300  
 Type of short-circuit protection < 60 s  
 Phase difference A und B [°] 90

### Measuring/setting range

Resolution 50 resolution

### Operating conditions

Ambient temperature [°C] -40...100  
 Note on ambient temperature for firmly laid cable: -40 °C  
 Max. relative air humidity [%] 98  
 Protection IP 64; (on the housing: IP 67; on the shaft: IP 64)

### Tests / approvals

Shock resistance 200 g  
 Vibration resistance 30 g  
 MTTF [years] 190

# RU6001



## Incremental encoder with solid shaft

RU-0050-I24/L2

Mechanical data	
Weight [g]	493
Dimensions [mm]	Ø 58 / L = 46.7
Materials	aluminium
Max. revolution, mechanical [U/min]	16000
Max. starting torque [Nm]	1
Reference temperature torque [°C]	20
Shaft design	solid shaft
Shaft diameter [mm]	6
Shaft material	steel (1.4104)
Max. shaft load axial (at the shaft end) [N]	10
Max. shaft load radial (at the shaft end) [N]	20
Fixing flange	synchro-flange

Remarks	
Notes	discontinued article

**Electrical connection**  
Cable: 2 m, PUR; Maximum cable length: 300 m; radial, can also be used axially

brown	A
green	A inverted
grey	B
pink	B inverted
red	0 index
black	0 index inverted
blue	L+ sensor
white	0V sensor
brown/green	L+ (Up)
white/green	0V (Un)
lilac	failure inverted
screen	housing

## Diagrams and graphs

Pulse diagram	<p>Output A Output B 0 index</p>
---------------	--