


E11686



Bulk cable

CABLE/100M/ PUR/4X0,34/BK

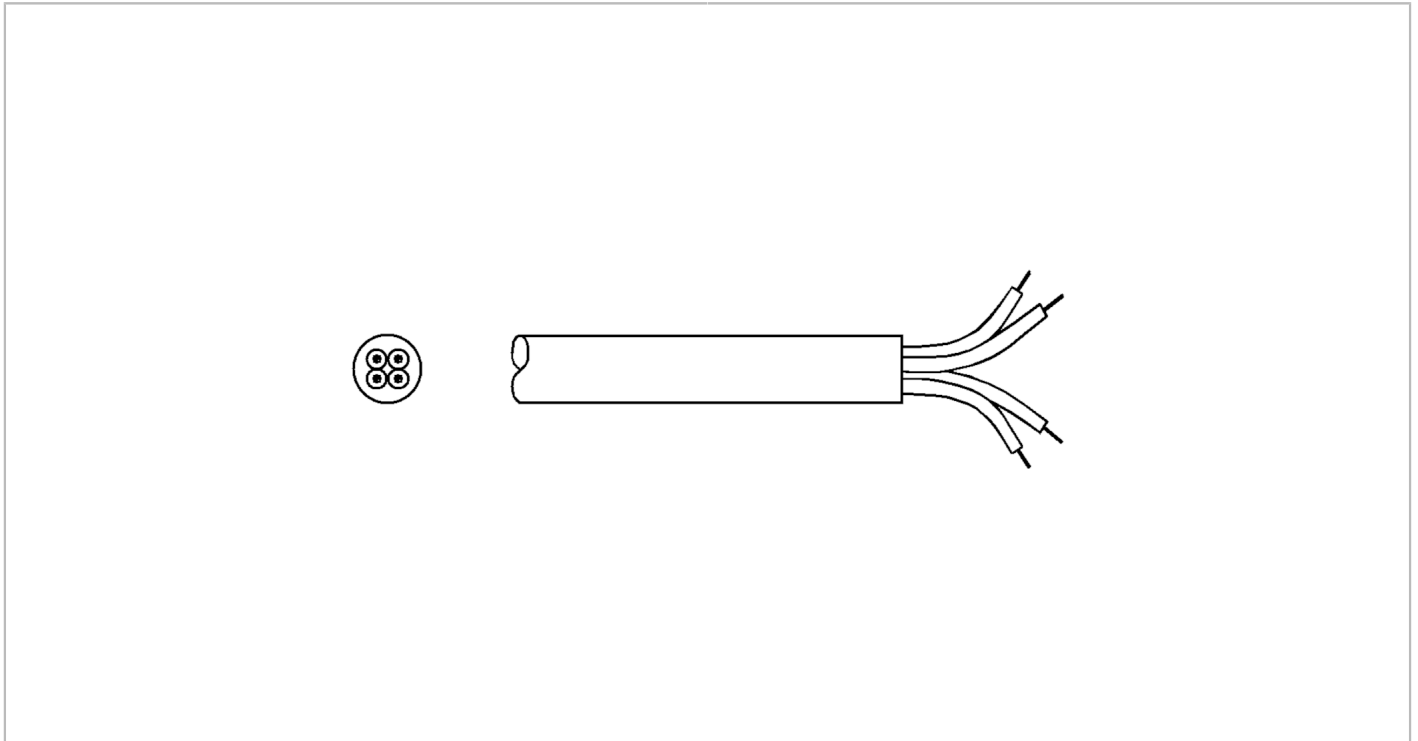

Electrical data

Operating voltage [V] < 300 AC/DC

Operating conditions

Ambient temperature [°C] -40...90

Mechanical data

Weight [g]	3025.8	
Drag chain suitability	bending radius for flexible use	min. 10 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s ²
	bending cycles	> 5 Mio.
	torsional strain	± 180 °/m
Drag chain suitability	yes	

Remarks

Pack quantity 1 pcs.

Electrical connection

Cable: 100 m, PUR, Halogen-free, black, Ø 4.9 mm; 4 x 0.34 mm², PP