


E12224



Wirable valve connector


SVDA0031PLSFKPG

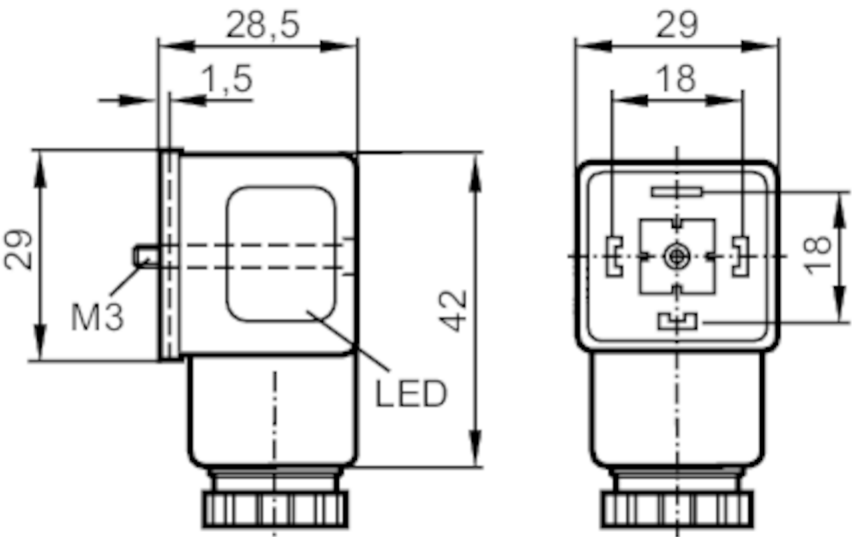

Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 24 DC
Max. current load total	[A]	16
Operating conditions		
Ambient temperature	[°C]	-40...125
Protection		IP 65
Mechanical data		
Weight	[g]	28.8
Materials	housing: PA transparent; end cap: PA black; Sealing: NBR black	
Remarks		
Pack quantity		1 pcs.

Electrical connection	
; ...1.5 mm² / 6...8 mm	
terminals: ...1.5 mm²; Cable sheath: Ø 6...8 mm	

Electrical connection - socket	
Connector: 1 x valve type A DIN, angled	




E12224



Wirable valve connector

SVDA031PLSFKPG

Connection

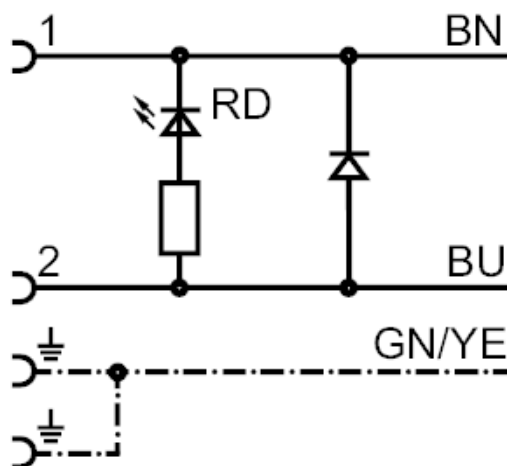

Core colours :

BN = brown
BU = blue
GN = green
YE = yellow