




## TF6730 | TC3 IoT Communicator

The TC3 IoT Communicator makes it possible to easily transmit process data to multiple end devices, monitor status changes, and send information back to the machine.

The TC3 IoT Communicator connects the TwinCAT controller to a messaging service, making it easy to set it up within the TwinCAT engineering environment to send and receive push messages and process data between the PLC and mobile operating systems. Since each end device is registered with a unique ID, messages can be transmitted to specific people and/or controllers. A flag within the message indicates whether messages and status data is buffered in the messaging service and available on demand.

Since the TC3 IoT Communicator is based on the publish-subscribe pattern, it does not require any special firewall settings but can be easily integrated into an existing IT network. To receive, send and display such messages, apps can be downloaded from the app stores free of charge.

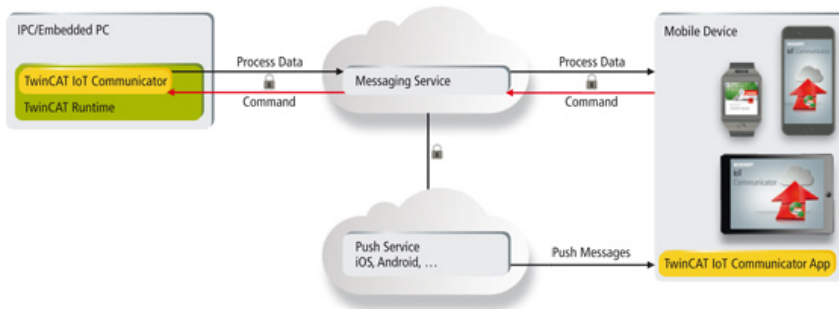

Technical data	TF6730
Required	TC1200

Ordering information	
TF6730-0020	TC3 IoT Communicator, platform 20 (Economy)
TF6730-0030	TC3 IoT Communicator, platform 30 (Economy Plus)
TF6730-0040	TC3 IoT Communicator, platform 40 (Performance)
TF6730-0050	TC3 IoT Communicator, platform 50 (Performance Plus)
TF6730-0060	TC3 IoT Communicator, platform 60 (Mid Performance)
TF6730-0070	TC3 IoT Communicator, platform 70 (High Performance)
TF6730-0080	TC3 IoT Communicator, platform 80 (Very High Performance)
TF6730-0081	TC3 IoT Communicator, platform 81 (Many-core 5...8 cores)
TF6730-0082	TC3 IoT Communicator, platform 82 (Many-core 9...16 cores)
TF6730-0083	TC3 IoT Communicator, platform 83 (Many-core 17...32 cores)
TF6730-0084	TC3 IoT Communicator, platform 84 (Many-core 33...64 cores)
TF6730-0090	TC3 IoT Communicator, platform 90 (Other)
TF6730-0091	TC3 IoT Communicator, platform 91 (Other 5...8 cores)
TF6730-0092	TC3 IoT Communicator, platform 92 (Other 9...16 cores)
TF6730-0093	TC3 IoT Communicator, platform 93 (Other 17...32 cores)
TF6730-0094	TC3 IoT Communicator, platform 94 (Other 33...64 cores)