


withdrawable circuit breaker with guide frame 3-pole, size III, IEC In=6300A to 690V, AC50/60Hz Icu=100kA at 500V rear connection vertical Overcurrent release ETU 45 LSING protection adjustable 0.4-1 in with display and cubicle bus with ground fault protection Opt.: Comm./measuring func./ZSS Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd auxiliary release 2NO+2NC K07= Tripped signaling contact, 1 CO not possible with option F02 R15= Position signaling switch, withdrawable part 3 changeover contacts

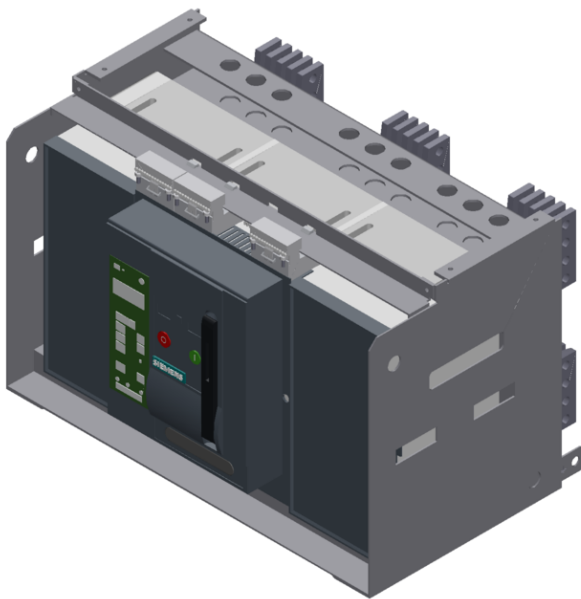

Model	
Product brand name	SENTRON
Product designation	ACB
Design of the product	IEC 60947-2
Design of the auxiliary switch	2 NO + 2 NC
Design of the operating mechanism	Pushbutton

Type of the driving mechanism	Manual/motorized operating mechanism with mechanical and electrical closing
Type of the driving mechanism / motor drive	Yes
Design of the overcurrent release	ETU45B

General technical data

Number of poles	3
Size of the circuit-breaker	3
Usage category	B
circuit-breaker / Design	3WL1

Voltage

Rated insulation voltage U_i	1 000 V
--------------------------------	---------

Protection class

Protection class IP	IP20
Protection class IP / on the front	IP20
Protective function of the overcurrent release	LSING

Dissipation

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	533.3 W
---	---------

Electricity

Operating current / at 45 °C / rated value	6 300 A
Continuous current / rated value	6 300 A
Adjustable pick-up value current	
• of instantaneous short-circuit trip unit / initial value	9 450 A
• of instantaneous short-circuit trip unit / Full-scale value	75 600 A

Main circuit

Operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Operating current	
• at 40 °C / rated value	6 300 A
• at 50 °C / rated value	5 920 A
• at 55 °C / rated value	5 920 A

Auxiliary circuit





Number of NC contacts / for auxiliary contacts	2
Number of NO contacts / for auxiliary contacts	2





Suitability

Suitability for use	Plant / motor protection
Product details	
Product component	
• Trip indicator	Yes
• Voltage trigger	Yes
• undervoltage release	No
Product extension / optional / motor drive	No
Product function	
Product function	
• Ground fault protection	Yes
Display and operation	
Display version	WITH 4-LINE DISPLAY
Short circuit	
Operational short-circuit current breaking capacity (Ics)	
• at 415 V / rated value	100 kA
• at 500 V / rated value	100 kA
• at 690 V / rated value	85 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 415 V / rated value	100 kA
• at 500 V / rated value	100 kA
• at 690 V / rated value	85 kA
Connections	
Arrangement of electrical connectors / for main current circuit	Main terminal on the rear vertical
Type of electrical connection / for main current circuit	busbar connection
Mechanical Design	
Height	466.5 mm
Width	704 mm
Depth	485.5 mm
(mounting type)	drawer unit
Environmental conditions	
Ambient temperature	
• during operation / minimum	-20 °C
• during operation / maximum	55 °C
• during storage / minimum	-40 °C
• during storage / maximum	70 °C
Certificates	
Reference code	

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

Q
Q

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CCC	 VDE	 EG-Konf.	Special Test Certificate Miscellaneous  ABS

Shipping Approval	other
 BUREAU VERITAS	 LRS
 PRS	 RMRS
	Environmental Confirmations Manufacturer Declaration

other
Miscellaneous

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1363-4FG37-4GA2-Z K07+R15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1363-4FG37-4GA2-Z K07+R15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1363-4FG37-4GA2-Z K07+R15

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

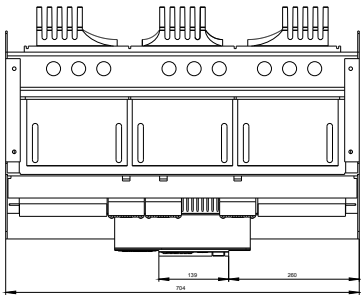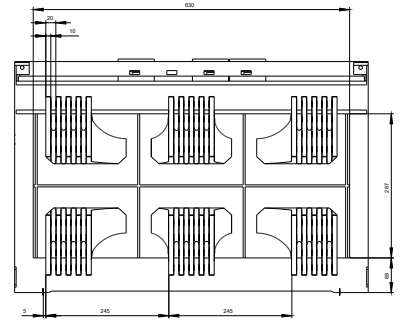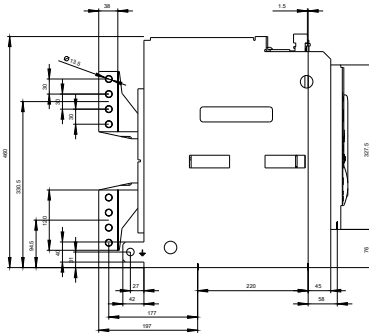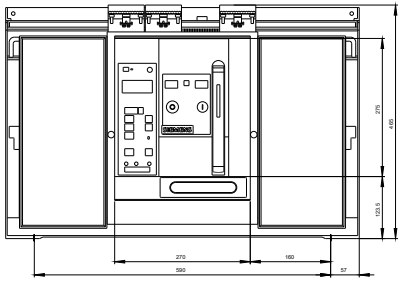

last modified:

06/26/2019