

Price\* : 537.00 GBP



### Main

Product or component type	Braking resistor
---------------------------	------------------

### Complementary

Range compatibility	Altivar Process ATV900 Altivar Machine ATV340 Altivar Machine ATV320
Product compatibility	Variable speed drive ATV930 wall mount 55 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 15 kW 200...240 V light cycle Variable speed drive ATV950 wall mount 55 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 15 kW 200...240 V medium cycle Variable speed drive ATV340 45 kW 380...480 V light cycle Variable speed drive ATV320 11 kW 200...240 V
Braking cycle	Light cycle (heavy duty) <0.8 s braking with 150 % braking torque for a 40 s cycle Light cycle (normal duty) <0.8 s braking with 120 % braking torque for a 40 s cycle Medium cycle (normal duty) <4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (heavy duty) <4 s braking with 165 % braking torque for a 40 s cycle
Average power available	1.1 kW at 50 °C
Ohmic value	8 Ohm
Electrical connection	terminal, connection capacity: <= 35 mm <sup>2</sup> / AWG 3 for drive terminal, connection capacity: <= 4 mm <sup>2</sup> / AWG 10 for temperature control switch
Protection type	Thermal protection via drive or temperature control switch at 120 °C
[Ue] rated operational voltage	24 V DC 250 V AC
Width	190 mm
Height	640 mm
Depth	180 mm
Product weight	4.5 kg

### Environment

Ambient air temperature for operation	0...50 °C
Ambient air temperature for storage	-25...70 °C
IP degree of protection	IP20

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

**Offer Sustainability**


EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>

**Contractual warranty**

Warranty	18 months
----------	-----------

Dimensions

Right Side and Front View

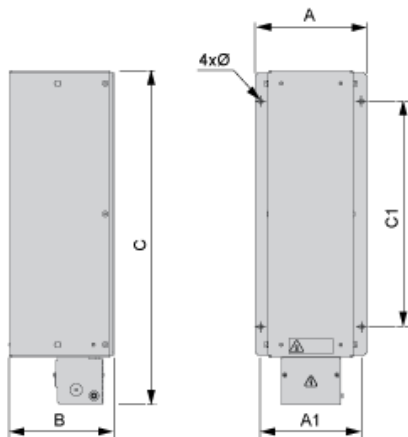

Dimensions in mm

A	B	C	A1	C1	Ø
190	180	640	170	380	6.6 x 9

Dimensions in in.


A	B	C	A1	C1	Ø
7.48	7.09	25.20	6.69	14.96	0.26 x 0.35

Mounting and Clearance




(1) Braking resistor

mm  
 in.

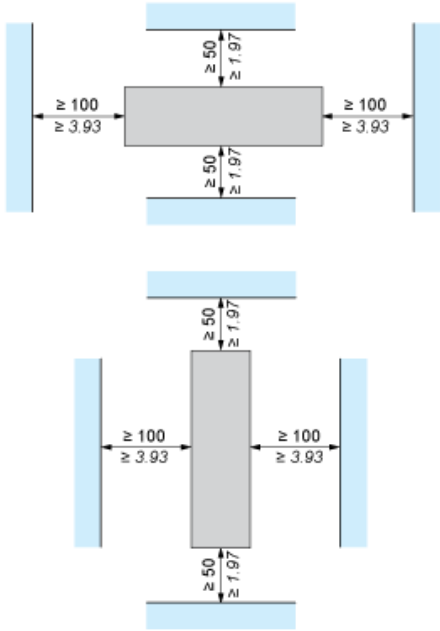


Recommended Schema

1 Braking Resistor



A1 : Drive or external braking unit  
A2 : Braking resistor  
PA, PB : Bus DC  
T1, T2 : Temperature control switch

2 Braking Resistors

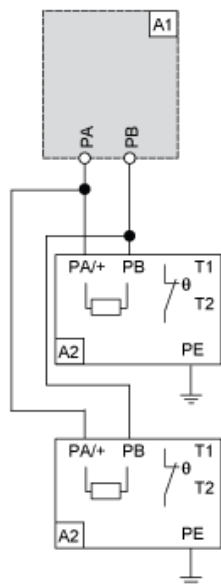

A1 : Drive or external braking unit  
A2 : Braking resistor  
PA, PB : Bus DC  
T1, T2 : Temperature control switch