




Price\* : 157.07 GBP

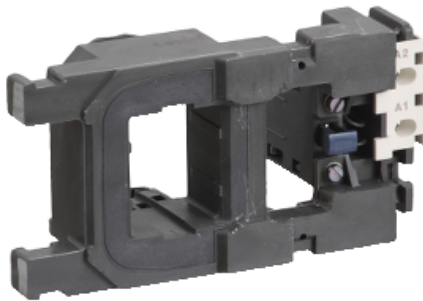

### Main

Range	TeSys
Product or component type	Contactor coil
Device short name	LX4FH
Range compatibility	TeSys F LC1F contactor
Product compatibility	LC1F265 LC1F330
Control circuit type	DC low consumption
[Uc] control circuit voltage	170 V DC
Average resistance	65.7 Ohm inrush at 20 °C 11500 Ohm holding at 20 °C
Inductance of closed circuit	1590 H
Operating time	40...50 ms closing 40...65 ms opening
Mechanical durability	10 Mcycles
Maximum operating rate	2400 cyc/h 55 °C

### Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Operational: 0.85...1.1 Uc (at 55 °C) Drop-out: 0.15...0.2 Uc (at 55 °C)
Inrush power in W	750 W (at 20 °C)
Hold-in power consumption in W	5 W at 20 °C

### Environment

Ambient air temperature for operation	-5...55 °C
Product weight	0.74 kg

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------