



Price\* : 17.17 GBP



### Main

Range	Linery
Product name	FT
Device short name	GV2G
Product or component type	Terminal block
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys GV2 TeSys D TeSys K TeSys U

### Complementary

[Ie] rated operational current	63 A
Mounting location	Top
IP degree of protection	IP20 conforming to IEC 60529
[Ui] rated insulation voltage	690 V conforming to IEC 60947-1
Connections - terminals	Screw clamp terminals 1 solid AWG 4 Screw clamp terminals 1 cable(s) 1.5...16 mm <sup>2</sup> flexible with cable end Screw clamp terminals 1 cable(s) 1.5...16 mm <sup>2</sup> flexible without cable end Screw clamp terminals 1 cable(s) 1.5...25 mm <sup>2</sup> solid Screw clamp terminals 2 cable(s) 1.5...4 mm <sup>2</sup> flexible with cable end Screw clamp terminals 2 cable(s) 1.5...6 mm <sup>2</sup> solid Screw clamp terminals 2 cable(s) 2.5...4 mm <sup>2</sup> flexible without cable end Screw clamp terminals 1 flexible AWG 4
Tightening torque	1.7 N.m - on screw clamp terminals 2.2 N.m - on connector
Product weight	0.115 kg

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations

## Contractual warranty

Warranty	18 months
----------	-----------

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

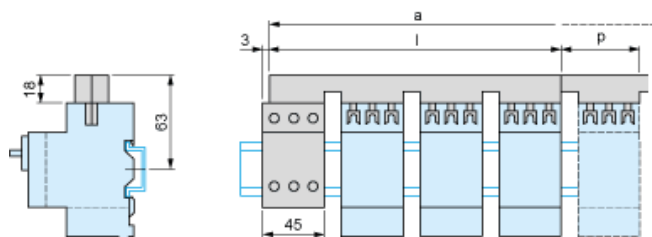

	l	p
GV2G445 (4 x 45 mm)	179	45
GV2G454 (4 x 54 mm)	206	54
GV2G472 (4 x 72 mm)	260	72

Number of tap-offs	a			
	5	6	7	8
GV2G445	224	269	314	359
GV2G454	260	314	368	422
GV2G472	332	404	476	548