



Model Number

NBB4-12GM70-E2-Y285691

Features

- 4 mm flush
- Extended temperature range
- Raised EMC resistance 30 V/m
- Switching output with integrated load resistance
- Datasheet values are changed only in consultation with the company Crown

Accessories

EXG-12

Quick mounting bracket with dead stop

Technical Data

General specifications

Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s_n	4 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 3.24 mm
Reduction factor r_{AI}		0.45
Reduction factor r_{CU}		0.35
Reduction factor r_{304}		0.75
Output type		3-wire

Nominal ratings

Operating voltage	U_B	5 ... 60 V
Switching frequency	f	0 ... 2500 Hz
Hysteresis	H	typ. 5 %
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 2 V
Operating current	I_L	0 ... 150 mA

Off-state current	I_r	0 ... 0.5 mA typ. 0.1 μ A
No-load supply current	I_0	≤ 7 mA
Time delay before availability	t_v	≤ 200 ms
Switching state indicator		LED, yellow

Functional safety related parameters

MTTF _d		1183 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %

Ambient conditions

Ambient temperature		-40 ... 100 °C (-40 ... 212 °F)
---------------------	--	---------------------------------

Mechanical specifications

Connection type		Cable connector , Deutsch with PUR cable , 740 mm
Connection assembly		Deutsch housing DT04-3P-C015 Deutsch wedge W3P Deutsch contact 1060-16-0622
Core cross-section		3 x 0.75 mm ²
Housing material		brass, nickel-plated
Sensing face		PBT
Degree of protection		IP69K, not connector!
Mass		72 g


Compliance with standards and directives

Standard conformity		
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012 EN 12895: 2015


Approvals and certificates

UL approval		cULus Listed, General Purpose Class 2 power source
CSA approval		cCSAus Listed, General Purpose Class 2 power source
CCC approval		Certified by China Compulsory Certification (CCC)

Dimensions

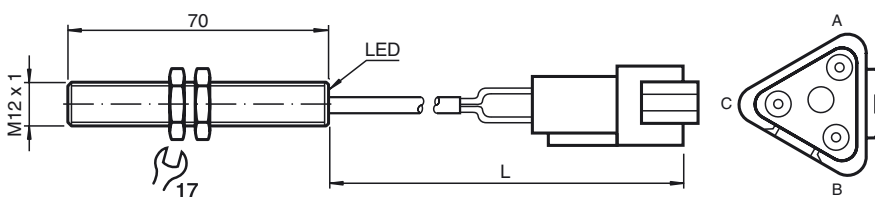

Electrical Connection



Release date: 2018-02-12 11:27 Date of issue: 2018-02-12 285691_eng.xml