



Model Number


SLP8-2-M

Deviation mirror

Features

- Deflecting mirror for single-beam deflection of the protection beam of safety light beams

Dimensions

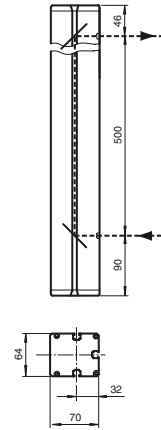

Technical data

Functional safety related parameters

Category	Cat. 4
Mission Time (T _M)	20 a

Ambient conditions

Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)

Mechanical specifications

Degree of protection	IP65
Material	
Housing	extruded aluminum profile, RAL 1021 (yellow) coated
Optical face	Plastic pane
Mass	approx. 2300 g



Matching system components

SB4-OR-4XP-B-4159

Safety control unit

SB4-OR-4XP

Safety control unit

SB4-OR-4XP-B

SB4 series safety control unit with 1 optional module slot for functional enhancement

SB4-OR-4XP-B-B

SB4 series safety control unit with optional module slots for functional enhancement

SB4-OR-4XP-B-B-B

SB4 series safety control unit with optional module slots for functional enhancement

SB4-OR-4XP-B-B-B-B

SB4 series safety control unit with optional module slots for functional enhancement

SB4-OR-4XP-B-B-B-B-B

SB4 series safety control unit with optional module slots for functional enhancement

SB4-OR-4XP-B-4158

Safety control unit

SB4-OR-4XP-3819

Safety control unit

SB4-OR-4XP-4M

Safety control unit

SB4-OR-4XP-4MD

Safety control unit

SB4-OR-4XP-4M-4X-4135

Safety control unit

SB4-OR-4XP-4M-4136

Safety control unit of series SB4

SB4-OR-4XP-4X

Safety control unit

SB4-OR-4XP-4X-3819

Safety control unit

SB4-OR-4XP-4136

Safety control unit of series SB4

Release date: 2011-11-15 15:01 Date of issue: 2018-02-27 417785_eng.xml