


Connection cable

ICZ-AIDA1-V45-5M-PUR-V45-G




- CAT5 cable
- Hard-wearing PUR cable
- Up to 100 MHz

Connecting cable RJ-45 to RJ-45, PUR cable 4-pole, CAT5e



Dimensions

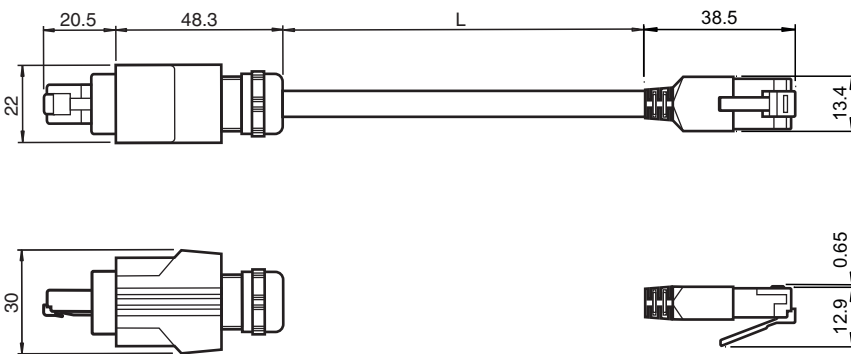

Technical Data

General specifications		
Number of pins		4
Electrical specifications		
Operating voltage	U_B	max. 125 V
Rated current	I_r	max. 500 mA
Compliance with standards and directives		
Standard conformity		
Standards		CAT5 (IEC 11801:2002) , CAT5e (TIA 568B:2001)
Ambient conditions		
Ambient temperature		-25 ... 60 °C (-13 ... 140 °F)
Mechanical specifications		
Degree of protection		IP65/IP67
Connection		Ethernet: RJ-45 , Category 5 , up to 100 MHz
Material		
Contacts		CuZn
Contact surface		Au

Release date: 2020-03-24 Date of issue: 2020-03-27 Filename: 240292_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

pf PEPPERL+FUCHS

Technical Data

Housing		Zinc die-casting, nickel-plated
Body		Zinc die-casting, nickel-plated
Cable		PUR
Cable		
Sheath diameter		5.8 mm
Color		water blue (RAL 5021)
Cores		2 x 2 x 26 AWG
Length	L	5 m

Connection

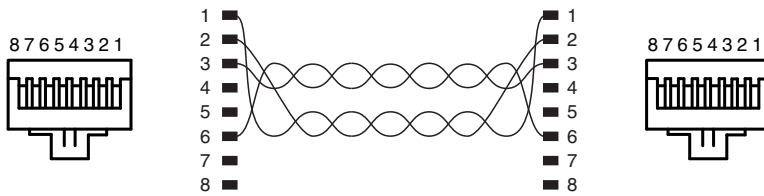

Release date: 2020-03-24 Date of issue: 2020-03-27 Filename: 240292_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com