



Technical data

General specifications

Sensor range		SU18: 66 mm SU18/35: 471 mm SU19: 66 mm SU17.1: 400 mm ML17-LL: 60 mm MHP-FR: 18 mm
Fiber optic length	l	2000 mm , adjustable
Fiber optic diameter	d	1.25 mm
Adapter form		00
End piece		thread
Bending radius		min. 25 mm
Fiber configuration	Fv	see dimensions

Ambient conditions

Ambient temperature		-30 ... 70 °C (-22 ... 158 °F)
---------------------	--	--------------------------------

Mechanical specifications

Material		
Optical face		plastic
Sheathing		PE
Core		plastic
End piece		metal

Model Number

HPF-D002-H

Plastic fiber optic - diffuse
M6 threading

Features

- Thread M6

Series

Fiber optic amplifiers

Device series	SU18/35 ; SU18 ; SU19 ; SU17.1; ML17-LL; MHP- FR
---------------	--


Description

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Dimensions

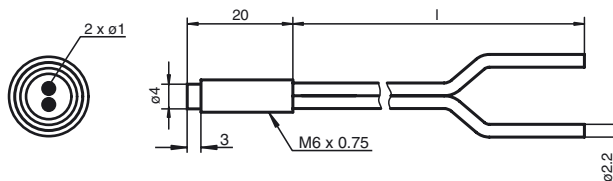

Release date: 2017-06-06 16:11 Date of issue: 2017-06-06 454045_eng.xml