



### Model Number


**DT3P-G-BK1,5M-PUR-01**

Single-ended male cordset, Deutsch connector, 3-pin PUR cable, outdoor

### Features

- Oil and abrasion resistant PUR line appropriate for drag chains
- Resistant to microbes and hydrolysis
- Resistant to salt water
- Suitable for outdoor use (UV- and ozone resistant)
- Halogen-free

### Dimensions

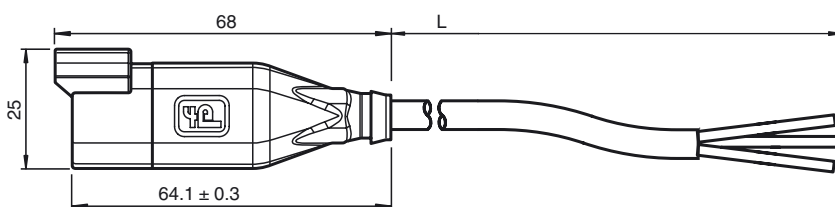

### Technical data

#### General specifications

Number of pins	3
Connection 1	Male connector
Construction type 1	straight
Threading 1	Deutsch connectors
Connection 2	cable end

#### Electrical specifications

Operating voltage	$U_B$	max. 48 V AC / 60 V DC
Operating current	$I_B$	max. 8 A Per contact
Lead resistance		Max. 39 $\Omega$ /km


#### Ambient conditions

Ambient temperature	Body: -40 ... 125 °C (-40 ... 257 °F) cable, fixed: -50 ... 105 °C (-58 ... 221 °F) cable, flexing: -30 ... 105 °C (-22 ... 221 °F)
Pollution degree	3

#### Mechanical specifications

Contact elements	spring-loaded contact socket
Degree of protection	IP68
Cable code	LI9Y 3x0,50 mm <sup>2</sup> 11Y
Material	
Contacts	Cu alloy
Contact surface	Ni
Body	PA, black
Cable	PUR
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	$\varnothing$ 4.5 mm $\pm$ 0.15 mm
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed
Color	black (Similar to RAL 9005)
Number of cores	3
Core cross-section	0.5 mm <sup>2</sup>
Conductor construction	28 x 0.15 mm $\varnothing$ 1 x symmetrically twisted
Length	L 1.5 m
Drag chain suitability	
Drag chain cycles	$\geq$ 2000000
Motion velocity	$\leq$ 3 m/s
Traverse distance	$\leq$ 10 m
Acceleration	$\leq$ 10 m/s <sup>2</sup>
Flammability	
Contact carrier	V-2
Housing	V-0
Cable	cURus AWM 21924/11558 105°C 300V FT2

### Electrical connection

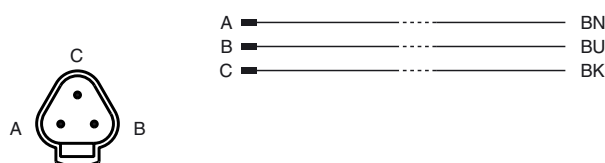

**Compliance with standards and directives**

## Standard conformity

Degree of protection	EN 60529:2000
Standards	IEC 61076-2-101:2008
Flammability	UL 1581; DIN EN 60332-2-2
Halogen-free	DIN VDE 0472-815 DIN EN 50267-2-1
Chemical resistance	DIN EN 60811-2-1:2002 IRM 902

**Approvals and certificates**

UL approval	cURus AWM 21924/11558 105°C 300V FT2
-------------	--------------------------------------