


Inductive slot sensor


SC3,5-G-N0



- 3.5 mm slot width
- Usable up to SIL 2 acc. to IEC 61508

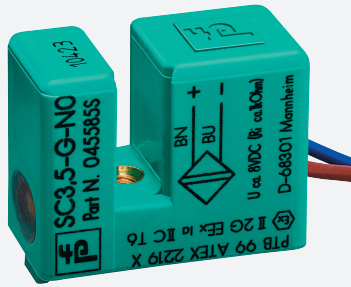

Dimensions

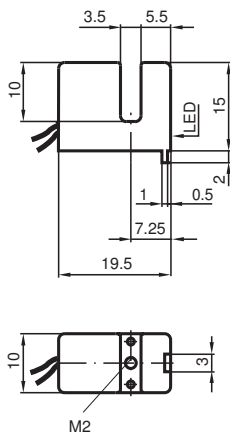

Technical Data

General specifications

Switching function	Normally closed (NC)
Output type	NAMUR
Slot width	3.5 mm
Depth of immersion (lateral)	5 ... 7 mm , typ. 6 mm
Output type	2-wire

Nominal ratings

Nominal voltage	U_o	8.2 V (R_i approx. 1 k Ω)
Operating voltage	U_B	5 ... 25 V
Switching frequency	f	0 ... 3000 Hz
Hysteresis	H	0.41 ... 0.6 mm
Suitable for 2:1 technology		yes , Reverse polarity protection diode not required
Current consumption		

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 045585_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Measuring plate not detected		≥ 3 mA
Measuring plate detected		≤ 1 mA
Switching state indicator		LED, yellow
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 2
MTTF _d		5880 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Electromagnetic compatibility		NE 21:2007
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
Approvals and certificates		
EAC conformity		TR CU 012/2011
UL approval		cULus Listed, General Purpose
Ordinary Location		E87056
Hazardous Location		E501628
Control drawing		116-0453
CSA approval		cCSAus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 100 °C (-13 ... 212 °F)
Mechanical specifications		
Connection type		flexible leads PVC , 135 mm
Core cross-section		0.14 mm ²
Housing material		PBT
Degree of protection		IP67
Data for application in connection with hazardous areas		
Equipment protection level		Ga , Gb , Gc (ic) , Da , Mb
Equipment protection level Ga		
Type of protection		intrinsic safety
CE marking		[*PD-Z02585A*]
Certificates		
Appropriate type		SC3,5...-N0...
ATEX certificate		PTB 99 ATEX 2219 X
ATEX marking		Ⓜ II 1G Ex ia IIC T6...T1 Ga
Standards		EN 60079-0:2012+A11:2013 , EN 60079-11:2012
IECEX certificate		IECEX PTB 11.0091X
IECEX marking		Ex ia IIC T6...T1 Ga
Standards		IEC 60079-0:2011 , IEC 60079-11:2011
Effective internal capacitance	C _i	max. 150 nF A cable length of 10 m is considered.
Effective internal inductance	L _i	max. 150 μH A cable length of 10 m is considered.
Maximum permissible ambient temperature	T _{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values.

Technical Data

for ATEX		at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$, T6 : 56 °C (132.8 °F) T5 : 68 °C (154.4 °F) T4 : 96 °C (204.8 °F) T3 : 96 °C (204.8 °F) T2 : 96 °C (204.8 °F) T1 : 96 °C (204.8 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$, T6 : 49 °C (120.2 °F) T5 : 61 °C (141.8 °F) T4 : 89 °C (192.2 °F) T3 : 89 °C (192.2 °F) T2 : 89 °C (192.2 °F) T1 : 89 °C (192.2 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$, T6 : 28 °C (82.4 °F) T5 : 40 °C (104 °F) T4 : 68 °C (154.4 °F) T3 : 68 °C (154.4 °F) T2 : 68 °C (154.4 °F) T1 : 68 °C (154.4 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$, T6 : 13 °C (55.4 °F) T5 : 25 °C (77 °F) T4 : 53 °C (127.4 °F) T3 : 53 °C (127.4 °F) T2 : 53 °C (127.4 °F) T1 : 53 °C (127.4 °F)
for IECEx		at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$, T6 : 73 °C (163.4 °F) T5 : 88 °C (190.4 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$, T6 : 66 °C (150.8 °F) T5 : 81 °C (177.8 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$, T6 : 45 °C (113 °F) T5 : 60 °C (140 °F) T4 : 89 °C (192.2 °F) T3 : 89 °C (192.2 °F) T2 : 89 °C (192.2 °F) T1 : 89 °C (192.2 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$, T6 : 30 °C (86 °F) T5 : 45 °C (113 °F) T4 : 74 °C (165.2 °F) T3 : 74 °C (165.2 °F) T2 : 74 °C (165.2 °F) T1 : 74 °C (165.2 °F)
Equipment protection level Gb		
Type of protection		intrinsic safety
CE marking		[*PD-Z02585A*]
Certificates		
Appropriate type		SC3,5...-N0...
ATEX certificate		PTB 99 ATEX 2219 X
ATEX marking		⊕ II 1G Ex ia IIC T6...T1 Ga
Standards		EN 60079-0:2012+A11:2013, EN 60079-11:2012
IECEx certificate		IECEx PTB 11.0091X
IECEx marking		Ex ia IIC T6...T1 Ga
Standards		IEC 60079-0:2011, IEC 60079-11:2011
Effective internal capacitance	C_i	max. 150 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	max. 150 µH A cable length of 10 m is considered.

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 045585_eng.pdf

Technical Data


Maximum permissible ambient temperature	T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$, T6: 73 °C (163.4 °F) T5: 88 °C (190.4 °F) T4: 100 °C (212 °F) T3: 100 °C (212 °F) T2: 100 °C (212 °F) T1: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$, T6: 66 °C (150.8 °F) T5: 81 °C (177.8 °F) T4: 100 °C (212 °F) T3: 100 °C (212 °F) T2: 100 °C (212 °F) T1: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$, T6: 45 °C (113 °F) T5: 60 °C (140 °F) T4: 89 °C (192.2 °F) T3: 89 °C (192.2 °F) T2: 89 °C (192.2 °F) T1: 89 °C (192.2 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$, T6: 30 °C (86 °F) T5: 45 °C (113 °F) T4: 74 °C (165.2 °F) T3: 74 °C (165.2 °F) T2: 74 °C (165.2 °F) T1: 74 °C (165.2 °F)
Equipment protection level Gc (ic)		
Type of protection		intrinsic safety
CE marking		[*PD-Z02586A*]
Certificates		
ATEX certificate		PF13CERT2895 X
ATEX marking		⊕ II 3G Ex ic IIC T6...T1 Gc
Standards		EN 60079-0:2012+A11:2013, EN 60079-11:2012
Effective internal capacitance	C_i	max. 150 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	max. 150 µH A cable length of 10 m is considered.
Maximum permissible ambient temperature	T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 20\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$, T6: 66 °C (150.8 °F) T5: 81 °C (177.8 °F) T4: 100 °C (212 °F) T3: 100 °C (212 °F) T2: 100 °C (212 °F) T1: 100 °C (212 °F) at $U_i = 20\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$, T6: 66 °C (150.8 °F) T5: 81 °C (177.8 °F) T4: 100 °C (212 °F) T3: 100 °C (212 °F) T2: 100 °C (212 °F) T1: 100 °C (212 °F) at $U_i = 20\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$, T6: 45 °C (113 °F) T5: 60 °C (140 °F) T4: 89 °C (192.2 °F) T3: 89 °C (192.2 °F) T2: 89 °C (192.2 °F) T1: 89 °C (192.2 °F) at $U_i = 20\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$, T6: 30 °C (86 °F) T5: 45 °C (113 °F) T4: 74 °C (165.2 °F) T3: 74 °C (165.2 °F) T2: 74 °C (165.2 °F) T1: 74 °C (165.2 °F)
Equipment protection level Da		
Type of protection		intrinsic safety
CE marking		[*PD-Z02585A*]
Certificates		

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 045585_eng.pdf

Technical Data

Appropriate type	SC3,5...-N0...	
ATEX certificate	PTB 99 ATEX 2219 X	
ATEX marking	Ⓔ II 1D Ex ia IIIC T135°C Da	
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012	
IECEX certificate	IECEX PTB 11.0091X	
IECEX marking	Ex ia IIIC T135°C Da	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	C_i	max. 150 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	max. 150 μ H A cable length of 10 m is considered.
Maximum permissible ambient temperature	T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$: 89 °C (192.2 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$: 74 °C (165.2 °F)
Equipment protection level Mb		
Type of protection	intrinsic safety	
Certificates		
Appropriate type	SC3,5...-N0...	
IECEX certificate	IECEX PTB 11.0091X	
IECEX marking	Ex ia I Mb	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	C_i	max. 150 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	max. 150 μ H A cable length of 10 m is considered.
Maximum permissible ambient temperature	T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$: 89 °C (192.2 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$: 74 °C (165.2 °F)
General information		
Use in the hazardous area	see instruction manuals	

Connection



Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 045585_eng.pdf