

Control interface unit

IC-KP2-2HB18-2V1



- LED status indicator of bus communication and read/write heads
- Max. 2 read/write heads can be connected
- Alternatively 1 read/write head and 1 trigger sensor can be connected

IDENTControl Compact control interface With CC-Link V2 interface


CC-Link V2



Function

The RFID identification system IDENTControl Compact from Pepperl+Fuchs offers a vast number of benefits compared to other systems, thanks to its innovative design. The control interfaces IDENTControl and IDENTControl Compact make up the core of the system. With its integrated interfaces to all commercially available fieldbus systems such as PROFIBUS, PROFINET, Ethernet, EtherCAT, CC-Link, serial connections (RS 232 or RS 485) and numerous connection options for read/write heads available for frequency ranges LF, HF and UHF, the IDENTControl Compact control interface can be easily and flexibly adapted to your requirements. LEDs on the front of the housing indicate bus communication, connected read/write heads and active read/write commands. Reliability of the application is further increased by using trigger sensors. The system is equally suited for use in control cabinets and field use in IP67. The interface to the higher-level fieldbus is integrated in the housing, and all connections are designed such that they are pluggable. This enables simple installation and quick, problem-free replacement in case of device failure. The consistent EMC design, with metal housing, grounding and shielded wires, offers a high degree of reliability.

Dimensions

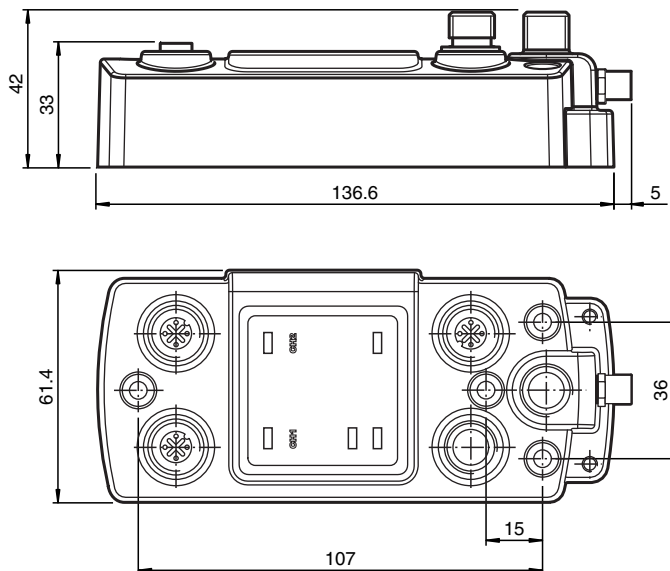

Release date: 2020-03-27 Date of issue: 2020-03-27 Filename: 223349_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data


General specifications	
Number of read/write heads	max. 2 alternatively 1 read/write head and 1 trigger sensor
UL File Number	E87056
Functional safety related parameters	
MTTF _d	170 a
Mission Time (T _M)	10 a
Diagnostic Coverage (DC)	0 %
Indicators/operating means	
LEDs 1, 2	Status indicator for read/write heads green: command at read/write head active yellow: approx. 1 second long, if command was successfully executed
LEDs CH1, CH2	green: read head detected red: Configuration error
LED PWR/ERR	green: power on red: Hardware fault
LED L RUN	green: on, data communication active
LED L ERR	red: on, invalid rotary switch setting or data transfer failure red: flashing, rotary switch setting changed since last switched on
Rotary switch	Address setting 01 ... 64 (decimal) Station no.: 0 ... 6 (x10) Station no.: 0 ... 9 (x1) Baud rate setting: 0 ... 4 Extended cyclic setting: 0, 1, 2, 4, 8
Electrical specifications	
Rated operating voltage	U _e 20 ... 30 V DC , PELV
Ripple	≤ 10 % at 30 V DC
Current consumption	≤ 4 A incl. read/write heads
Power consumption	P ₀ 3.5 W Without read/write heads
Galvanic isolation	basic insulation acc. to DIN EN 50178, rated insulation voltage of 50 V _{eff}
Interface 1	
Interface type	CC-Link
Physical	RS-485
Protocol	CC-Link
Transfer rate	156; 625 kBit/s 2,5;5;10 Mbit/s
Interface 2	
Interface type	Diagnostic Interface
Physical	RS 232
Protocol	ASCII
Transfer rate	38.4 kBit/s
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61000-6-2:2005, EN 61000-6-4:2007
Standard conformity	
Degree of protection	IEC 60529:2001
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Climatic conditions	air humidity max. 96 % Salt spray resistant to EN 60068-2-52
Shock and impact resistance	Oscillation (Sine): 5 g, 10 - 1000 Hz to EN 60068-2-6 Shock (Half-sine): 30 g, 11 ms in accordance with EN 60068-2-27
Mechanical specifications	
Degree of protection	IP67

Release date: 2020-03-27 Date of issue: 2020-03-27 Filename: 223349_eng.pdf


Technical Data

Connection	Read/write heads: shielded, 4-pin, M12 connector Power supply: M12 connector Protective earth: M4 earthing screw Diagnostic RS 232: M8 connector CC-Link: M12 connector, A-coded
Material	
Housing	powder coated aluminum
Installation	screw fixing
Mass	approx. 300 g

Connection

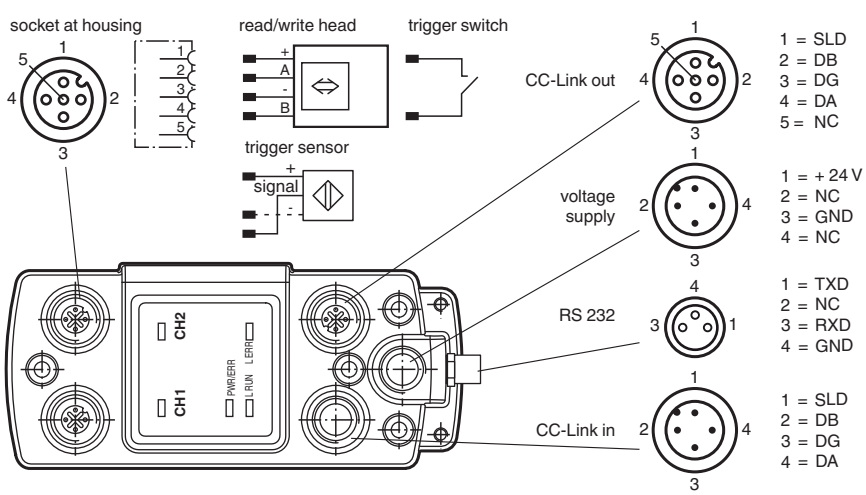

Assembly

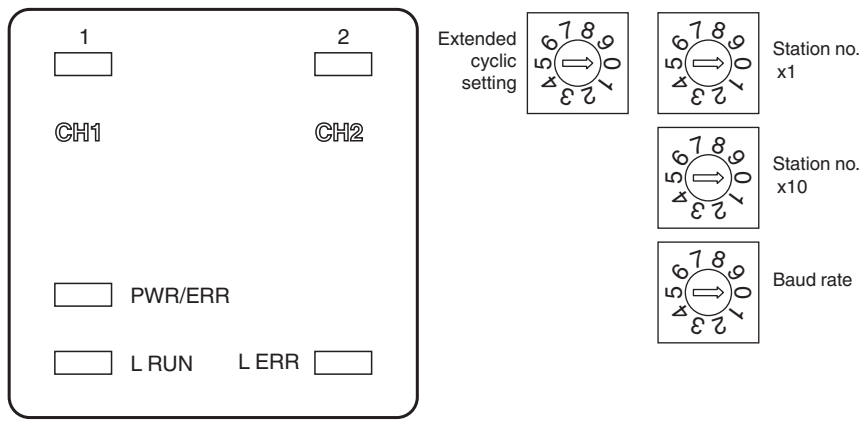







Accessories

	V1-G-5M-PUR-ABG-V1-W	Connecting cable, M12 to M12, PUR cable 4-pin, shielded
	V1-G-10M-PUR-ABG-V1-W	Connecting cable, M12 to M12, PUR cable 4-pin, shielded
	ICZ-MH05-SACB-8	Mounting aid for DIN rail

Release date: 2020-03-27 Date of issue: 2020-03-27 Filename: 223349_eng.pdf

Accessories

	V1-G-ABG-PG9	Female connector, M12, 4-pin, screened, field attachable
	V1S-G-ABG-PG9	4-pin, M12, screened cable connector, field attachable
	ICZ-3T-0,3M-PVC-CCL-V1-G	Y connection cable for CC-Link
	V3S-GM-0,15M-PUR-ABG-SUBD	Adapter M8 on Sub-D for PC connection with null modem cable
	ICZ-TR-V1-130R	Terminal resistor for CC-Link
	ICZ-TR-V1-110R	Terminal resistor for CC-Link