



Model Number


IPC03-C1 10pcs

Data carrier

Features

- Battery-free data carrier
- 32 bit fixcode
- 928 bits memory available
- Readable and writable from both sides
- Degree of protection IP68
- ISO credit card format

Dimensions

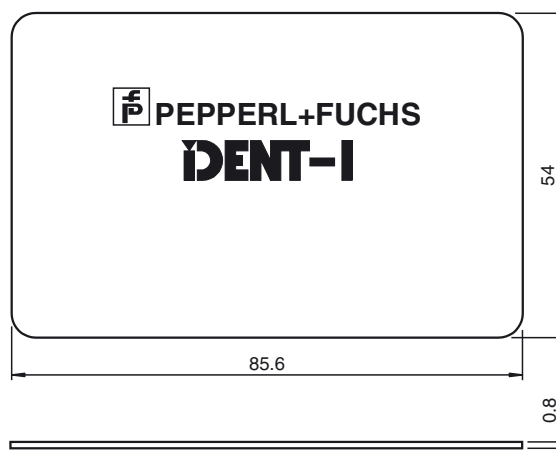

Technical data

General specifications

Operating frequency	125 kHz
Transfer rate	2 kBit/s
Color	white

Memory

Chip Type	EM4450 Titan (EM Microelectronic)
EEPROM	928 Bit
Read cycles	unlimited
Write cycles	> 100000
Data retention period	10 years at 55 °C (131 °F)

Directive conformity

Radio equipment	
Directive 2014/53/EU	EN 300330
RoHS	
Directive 2011/65/EU (RoHS)	EN 50581

Standard conformity

Degree of protection	EN 60529
RFID	ISO/IEC 18000-2

Ambient conditions

Ambient temperature	-25 ... 50 °C (-13 ... 122 °F)
Storage temperature	-25 ... 50 °C (-13 ... 122 °F)

Mechanical specifications

Degree of protection	IP68
Material	
Housing	PVC
Installation	
In air	yes
Mass	6 g
Construction type	Card
Note	Packaging unit, 10-piece

Notes

The transponder can be read and written from either side.