


Inductive sensor


NJ1,5-8GM-N



- 1.5 mm flush
- Usable up to SIL 2 acc. to IEC 61508

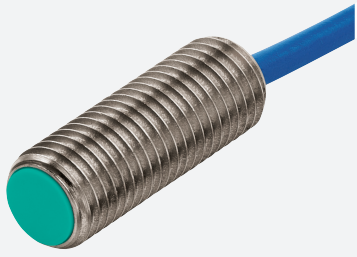

Dimensions



Technical Data

General specifications

Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	s_n	1.5 mm
Installation		flush
Assured operating distance	s_a	0 ... 1.215 mm
Actual operating distance	s_r	1.35 ... 1.65 mm typ.
Reduction factor r_{AI}		0.4
Reduction factor r_{Cu}		0.3
Reduction factor r_{304}		0.85
Output type		2-wire

Nominal ratings

Nominal voltage	U_o	8.2 V (R_i approx. 1 k Ω)
-----------------	-------	--------------------------------------

Technical Data

Switching frequency	f	0 ... 5000 Hz
Hysteresis	H	1 ... 10 typ. 5 %
Suitable for 2:1 technology		yes , Reverse polarity protection diode not required
Current consumption		
Measuring plate not detected		min. 3 mA
Measuring plate detected		≤ 1 mA
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 2
Compliance with standards and directives		
Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
Approvals and certificates		
EAC conformity		TR CU 012/2011
FM approval		
Control drawing		116-0165
UL approval		
Ordinary Location		E87056
Hazardous Location		E501628
Control drawing		116-0452
CSA approval		cCSAus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 100 °C (-13 ... 212 °F)
Mechanical specifications		
Connection type		cable PVC , 2 m
Core cross-section		0.14 mm ²
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		PBT
Degree of protection		IP66 / IP67
Cable		
Cable diameter		2.6 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Data for application in connection with hazardous areas		
Equipment protection level		Ga , Gb , Da , Mb
Equipment protection level Ga		
Type of protection		intrinsic safety
CE marking		[*PD-Z02585A*]
Certificates		
Appropriate type		NJ1,5-8GM-N...
ATEX certificate		PTB 00 ATEX 2048 X
ATEX marking		Ⓜ II 1G Ex ia IIC T6...T1 Ga
Standards		EN 60079-0:2012 +A11:2013, EN 60079-11:2012
IECEX certificate		IECEX PTB 11.0037X
IECEX marking		Ex ia IIC T6...T1 Ga
Standards		IEC 60079-0:2011 , IEC 60079-11:2011
Effective internal capacitance	C _i	max. 30 nF A cable length of 10 m is considered.
Effective internal inductance	L _i	max. 50 µH A cable length of 10 m is considered.

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 106361_eng.pdf

Technical Data

Maximum permissible ambient temperature	T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values.
for ATEX		at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$, T6 : 56 °C (132.8 °F) T5 : 68 °C (154.4 °F) T4 : 96 °C (204.8 °F) T3 : 96 °C (204.8 °F) T2 : 96 °C (204.8 °F) T1 : 96 °C (204.8 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$, T6 : 51 °C (123.8 °F) T5 : 63 °C (145.4 °F) T4 : 91 °C (195.8 °F) T3 : 91 °C (195.8 °F) T2 : 91 °C (195.8 °F) T1 : 91 °C (195.8 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$, T6 : 32 °C (89.6 °F) T5 : 44 °C (111.2 °F) T4 : 67 °C (152.6 °F) T3 : 67 °C (152.6 °F) T2 : 67 °C (152.6 °F) T1 : 67 °C (152.6 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$, T6 : 19 °C (66.2 °F) T5 : 31 °C (87.8 °F) T4 : 41 °C (105.8 °F) T3 : 41 °C (105.8 °F) T2 : 41 °C (105.8 °F) T1 : 41 °C (105.8 °F)
for IECEx		at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$, T6 : 73 °C (163.4 °F) T5 : 88 °C (190.4 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$, T6 : 68 °C (154.4 °F) T5 : 83 °C (181.4 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$, T6 : 49 °C (120.2 °F) T5 : 64 °C (147.2 °F) T4 : 67 °C (152.6 °F) T3 : 67 °C (152.6 °F) T2 : 67 °C (152.6 °F) T1 : 67 °C (152.6 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$, T6 : 36 °C (96.8 °F) T5 : 42 °C (107.6 °F) T4 : 42 °C (107.6 °F) T3 : 42 °C (107.6 °F) T2 : 42 °C (107.6 °F) T1 : 42 °C (107.6 °F)
Equipment protection level Gb		
Type of protection		intrinsic safety
CE marking		[*PD-Z02585A*]
Certificates		
Appropriate type		NJ1,5-8GM-N...
ATEX certificate		PTB 00 ATEX 2048 X
ATEX marking		Ⓜ II 1G Ex ia IIC T6...T1 Ga
Standards		EN 60079-0:2012+A11:2013 , EN 60079-11:2012
IECEx certificate		IECEx PTB 11.0037X
IECEx marking		Ex ia IIC T6...T1 Ga
Standards		IEC 60079-0:2011 , IEC 60079-11:2011
Effective internal capacitance	C_i	max. 30 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	max. 50 µH A cable length of 10 m is considered.

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 106361_eng.pdf

Technical Data

Maximum permissible ambient temperature	T_{amb}	<p>Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$, $T_6 : 73\text{ °C}$ (163.4 °F) $T_5 : 88\text{ °C}$ (190.4 °F) $T_4 : 100\text{ °C}$ (212 °F) $T_3 : 100\text{ °C}$ (212 °F) $T_2 : 100\text{ °C}$ (212 °F) $T_1 : 100\text{ °C}$ (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$, $T_6 : 68\text{ °C}$ (154.4 °F) $T_5 : 83\text{ °C}$ (181.4 °F) $T_4 : 100\text{ °C}$ (212 °F) $T_3 : 100\text{ °C}$ (212 °F) $T_2 : 100\text{ °C}$ (212 °F) $T_1 : 100\text{ °C}$ (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$, $T_6 : 49\text{ °C}$ (120.2 °F) $T_5 : 64\text{ °C}$ (147.2 °F) $T_4 : 67\text{ °C}$ (152.6 °F) $T_3 : 67\text{ °C}$ (152.6 °F) $T_2 : 67\text{ °C}$ (152.6 °F) $T_1 : 67\text{ °C}$ (152.6 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$, $T_6 : 36\text{ °C}$ (96.8 °F) $T_5 : 42\text{ °C}$ (107.6 °F) $T_4 : 42\text{ °C}$ (107.6 °F) $T_3 : 42\text{ °C}$ (107.6 °F) $T_2 : 42\text{ °C}$ (107.6 °F) $T_1 : 42\text{ °C}$ (107.6 °F)</p>
---	-----------	--

Equipment protection level Da

Type of protection		intrinsic safety
CE marking		[*PD-Z02585A*]
Certificates		
Appropriate type		NJ1,5-8GM-N...
ATEX certificate		PTB 00 ATEX 2048 X
ATEX marking		Ⓜ II 1D Ex ia IIIC T135°C Da
Standards		EN 60079-0:2012+A11:2013, EN 60079-11:2012
IECEx certificate		IECEx PTB 11.0037X
IECEx marking		Ex ia IIIC T135°C Da
Standards		IEC 60079-0:2011, IEC 60079-11:2011
Effective internal capacitance	C_i	max. 30 μF A cable length of 10 m is considered.
Effective internal inductance	L_i	max. 50 μH A cable length of 10 m is considered.
Maximum permissible ambient temperature	T_{amb}	<p>Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$: 67 °C (152.6 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$: 41 °C (105.8 °F)</p>

Equipment protection level Mb

Type of protection		intrinsic safety
Certificates		
Appropriate type		NJ1,5-8GM-N...
IECEx certificate		IECEx PTB 11.0037X
IECEx marking		Ex ia I Mb
Standards		IEC 60079-0:2011, IEC 60079-11:2011
Effective internal capacitance	C_i	max. 30 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	max. 50 μH A cable length of 10 m is considered.
Maximum permissible ambient temperature	T_{amb}	<p>Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$: 67 °C (152.6 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$: 41 °C (105.8 °F)</p>

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 106361_eng.pdf


Technical Data

General information

Use in the hazardous area

see instruction manuals

Connection



Accessories

	<p>BF 8</p>	<p>Mounting flange, 8 mm</p>
---	--------------------	------------------------------