


Dimensions

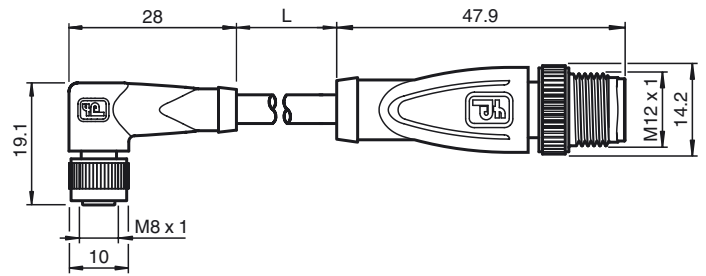

Model Number

V3-WM-5M-PUR-V11-G

Double-ended cordset, M8 to M12 3-pin, PUR cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold-plated and machined contacts
- Halogen-free
- Suitable for 2- and 3-wire technology

Technical data

General specifications

| | |
|---------------------|----------------|
| Number of pins | 3 |
| Connection 1 | socket |
| Construction type 1 | right angle |
| Threading 1 | M8 |
| Connection 2 | Male connector |
| Construction type 2 | straight |
| Threading 2 | M12 |

Electrical specifications

| | | |
|-------------------|-------|------------------------|
| Operating voltage | U_B | max. 48 V AC / 60 V DC |
| Operating current | I_B | max. 3 A |
| Volume resistance | | < 5 m Ω |

Ambient conditions

| | |
|---------------------|---|
| Ambient temperature | cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F) |
| Pollution degree | 3 |


Mechanical specifications

| | |
|------------------------|--|
| Contact elements | spring-loaded contact socket |
| Pin diameter | 1 mm |
| Degree of protection | IP67 |
| Material | |
| Contacts | CuSn / Au |
| Contact surface | Au |
| Body | TPU, green |
| Cable | PUR |
| Slotted nut | Diecast zinc |
| Sleeve connector | Diecast zinc |
| Core insulation | PP |
| Cable | fine-strand, flexible |
| Sheath diameter | Ø 4.3 mm |
| Bending radius | > 15 x cable diameter, moving > 8 x cable diameter, fixed |
| Color | grey |
| Cores | 3 x 0.25 mm ² |
| Conductor construction | 14 x 0.15 mm Ø |
| Length | L 5 m |

Compliance with standards and directives

| | |
|---------------------|---|
| Standard conformity | |
| Specification | connector M8 x 1 : IEC 61076-2-104 connector M12 x 1 : IEC 61076-2-101 |

Electrical connection

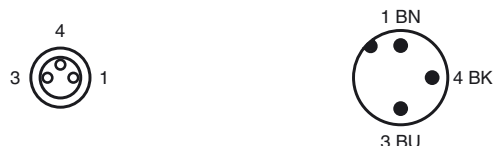

Release date: 2019-07-15 13:37 Date of issue: 2019-07-15 192211_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".