



## Model Number

SJ5-N

## Features

- 5 mm slot width
- Usable up to SIL 2 acc. to IEC 61508

## Technical Data

### General specifications

Switching function	Normally closed (NC)
Output type	NAMUR
Slot width	5 mm
Depth of immersion (lateral)	5 ... 7 mm , typ. 6 mm
Output type	2-wire

### Nominal ratings

Nominal voltage	$U_o$	8.2 V ( $R_i$ approx. 1 k $\Omega$ )
Operating voltage	$U_B$	5 ... 25 V
Switching frequency	f	0 ... 2000 Hz
Hysteresis	H	0.05 ... 0.65 mm

### Design data

Current consumption		
Measuring plate not detected	$\geq$ 3 mA	at nominal voltage
Measuring plate detected	$\leq$ 1 mA	at nominal voltage

### Functional safety related parameters

Safety Integrity Level (SIL)	SIL 2
MTTF <sub>d</sub>	9060 a
Mission Time ( $T_M$ )	20 a
Diagnostic Coverage (DC)	0 %

### Ambient conditions

Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)
---------------------	---------------------------------

### Mechanical specifications

Connection type	flexible leads LiY , 500 mm
Core cross-section	0.14 mm <sup>2</sup>
Housing material	PBT
Degree of protection	IP67

### General information

Use in the hazardous area	see instruction manuals
---------------------------	-------------------------


### Compliance with standards and directives

Standard conformity	
NAMUR	EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012


### Approvals and certificates

EAC conformity	TR CU 012/2011
FM approval	
Control drawing	116-0165
UL approval	cULus Listed, General Purpose
Ordinary Location	E87056
Hazardous Location	E501628
Control drawing	116-0453
CSA approval	cCSAus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated $\leq$ 36 V

## Dimensions

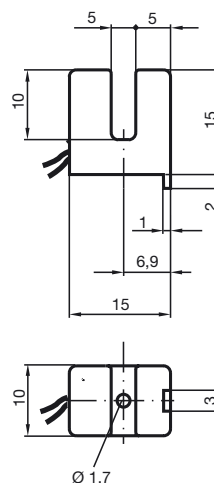

Electrical Connection



**Data for application in connection with hazardous areas**

Equipment protection level	Ga , Gb , Da , Mb
----------------------------	-------------------

**Equipment protection level Ga**

Type of protection	intrinsic safety
CE marking	CE 0102

**Certificates**

Appropriate type	SJ5-...-N...
ATEX certificate	PTB 99 ATEX 2219 X
ATEX marking	Ⓔ II 1G Ex ia IIC T6...T1 Ga
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012
IECEX certificate	IECEX PTB 11.0091X
IECEX marking	Ex ia IIC T6...T1 Ga
Standards	IEC 60079-0:2011 , IEC 60079-11:2011

Effective internal capacitance	$C_i$	$\leq 50$ nF A cable length of 10 m is considered.
--------------------------------	-------	---

Effective internal inductance	$L_i$	$\leq 250$ $\mu$ H A cable length of 10 m is considered.
-------------------------------	-------	---

Maximum permissible ambient temperature $T_{amb}$	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values.
---	--

for ATEX	<p>at <math>U_i = 16</math> V , <math>I_i = 25</math> mA , <math>P_i = 34</math> mW ,  T6 : 56 °C (132.8 °F)  T5 : 68 °C (154.4 °F)  T4 : 96 °C (204.8 °F)  T3 : 96 °C (204.8 °F)  T2 : 96 °C (204.8 °F)  T1 : 96 °C (204.8 °F)</p> <p>at <math>U_i = 16</math> V , <math>I_i = 25</math> mA , <math>P_i = 64</math> mW ,  T6 : 49 °C (120.2 °F)  T5 : 61 °C (141.8 °F)  T4 : 89 °C (192.2 °F)  T3 : 89 °C (192.2 °F)  T2 : 89 °C (192.2 °F)  T1 : 89 °C (192.2 °F)</p> <p>at <math>U_i = 16</math> V , <math>I_i = 52</math> mA , <math>P_i = 169</math> mW ,  T6 : 28 °C (82.4 °F)  T5 : 40 °C (104 °F)  T4 : 68 °C (154.4 °F)  T3 : 68 °C (154.4 °F)  T2 : 68 °C (154.4 °F)  T1 : 68 °C (154.4 °F)</p> <p>at <math>U_i = 16</math> V , <math>I_i = 76</math> mA , <math>P_i = 242</math> mW ,  T6 : 13 °C (55.4 °F)  T5 : 25 °C (77 °F)  T4 : 53 °C (127.4 °F)  T3 : 53 °C (127.4 °F)  T2 : 53 °C (127.4 °F)  T1 : 53 °C (127.4 °F)</p>
----------	--

for IECEX	<p>at <math>U_i = 16</math> V , <math>I_i = 25</math> mA , <math>P_i = 34</math> mW ,  T6 : 73 °C (163.4 °F)  T5 : 88 °C (190.4 °F)  T4 : 100 °C (212 °F)  T3 : 100 °C (212 °F)  T2 : 100 °C (212 °F)  T1 : 100 °C (212 °F)</p> <p>at <math>U_i = 16</math> V , <math>I_i = 25</math> mA , <math>P_i = 64</math> mW ,  T6 : 66 °C (150.8 °F)  T5 : 81 °C (177.8 °F)  T4 : 100 °C (212 °F)  T3 : 100 °C (212 °F)  T2 : 100 °C (212 °F)  T1 : 100 °C (212 °F)</p> <p>at <math>U_i = 16</math> V , <math>I_i = 52</math> mA , <math>P_i = 169</math> mW ,  T6 : 45 °C (113 °F)  T5 : 60 °C (140 °F)  T4 : 89 °C (192.2 °F)  T3 : 89 °C (192.2 °F)  T2 : 89 °C (192.2 °F)  T1 : 89 °C (192.2 °F)</p> <p>at <math>U_i = 16</math> V , <math>I_i = 76</math> mA , <math>P_i = 242</math> mW ,  T6 : 30 °C (86 °F)  T5 : 45 °C (113 °F)  T4 : 74 °C (165.2 °F)  T3 : 74 °C (165.2 °F)  T2 : 74 °C (165.2 °F)  T1 : 74 °C (165.2 °F)</p>
-----------	--

Release date: 2019-08-27 16:39 Date of issue: 2019-08-27 106607\_eng.xml

**Equipment protection level Gb**

Type of protection	intrinsic safety	
CE marking	CE 0102	
<b>Certificates</b>		
Appropriate type	SJ5-...-N...	
ATEX certificate	PTB 99 ATEX 2219 X	
ATEX marking	II 1G Ex ia IIC T6...T1 Ga	
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012	
IECEX certificate	IECEX PTB 11.0091X	
IECEX marking	Ex ia IIC T6...T1 Ga	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	$C_i$	$\leq 50$ nF A cable length of 10 m is considered.
Effective internal inductance	$L_i$	$\leq 250$ $\mu$ H A cable length of 10 m is considered.
Maximum permissible ambient temperature $T_{amb}$	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16$ V , $I_i = 25$ mA , $P_i = 34$ mW , T6 : 73 °C (163.4 °F) T5 : 88 °C (190.4 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16$ V , $I_i = 25$ mA , $P_i = 64$ mW , T6 : 66 °C (150.8 °F) T5 : 81 °C (177.8 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16$ V , $I_i = 52$ mA , $P_i = 169$ mW , T6 : 45 °C (113 °F) T5 : 60 °C (140 °F) T4 : 89 °C (192.2 °F) T3 : 89 °C (192.2 °F) T2 : 89 °C (192.2 °F) T1 : 89 °C (192.2 °F) at $U_i = 16$ V , $I_i = 76$ mA , $P_i = 242$ mW , T6 : 30 °C (86 °F) T5 : 45 °C (113 °F) T4 : 74 °C (165.2 °F) T3 : 74 °C (165.2 °F) T2 : 74 °C (165.2 °F) T1 : 74 °C (165.2 °F)	

**Equipment protection level Da**

Type of protection	intrinsic safety	
CE marking	CE 0102	
<b>Certificates</b>		
Appropriate type	SJ5-...-N...	
ATEX certificate	PTB 99 ATEX 2219 X	
ATEX marking	II 1D Ex ia IIIC T135°C Da	
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012	
IECEX certificate	IECEX PTB 11.0091X	
IECEX marking	Ex ia IIIC T135°C Da	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	$C_i$	$\leq 50$ $\mu$ F A cable length of 10 m is considered.
Effective internal inductance	$L_i$	$\leq 250$ $\mu$ H A cable length of 10 m is considered.
Maximum permissible ambient temperature $T_{amb}$	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16$ V , $I_i = 25$ mA , $P_i = 34$ mW : 100 °C (212 °F) at $U_i = 16$ V , $I_i = 25$ mA , $P_i = 64$ mW : 100 °C (212 °F) at $U_i = 16$ V , $I_i = 52$ mA , $P_i = 169$ mW : 89 °C (192.2 °F) at $U_i = 16$ V , $I_i = 76$ mA , $P_i = 242$ mW : 74 °C (165.2 °F)	

**Equipment protection level Mb**

Type of protection	intrinsic safety	
<b>Certificates</b>		
Appropriate type	SJ5-...-N...	
IECEX certificate	IECEX PTB 11.0091X	
IECEX marking	Ex ia I Mb	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	$C_i$	$\leq 50$ nF A cable length of 10 m is considered.
Effective internal inductance	$L_i$	$\leq 250$ $\mu$ H A cable length of 10 m is considered.

Maximum permissible ambient temperature  $T_{amb}$

Also observe the maximum permissible ambient temperature stated in the general technical data.  
Keep to the lower of the two values.

at  $U_i = 16\text{ V}$ ,  $I_i = 25\text{ mA}$ ,  $P_i = 34\text{ mW}$  :  $100\text{ °C}$  ( $212\text{ °F}$ )

at  $U_i = 16\text{ V}$ ,  $I_i = 25\text{ mA}$ ,  $P_i = 64\text{ mW}$  :  $100\text{ °C}$  ( $212\text{ °F}$ )

at  $U_i = 16\text{ V}$ ,  $I_i = 52\text{ mA}$ ,  $P_i = 169\text{ mW}$  :  $89\text{ °C}$  ( $192.2\text{ °F}$ )

at  $U_i = 16\text{ V}$ ,  $I_i = 76\text{ mA}$ ,  $P_i = 242\text{ mW}$  :  $74\text{ °C}$  ( $165.2\text{ °F}$ )

Release date: 2019-08-27 16:39 Date of issue: 2019-08-27 106607\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**