



Model Number

NJ15S+U4+N

Features

- 15 mm flush

Accessories

MHW 01

Modular mounting bracket

MH 04-2681F

Mounting aid for VariKont, +U1+ and +U9*

MH 04-2057B

Mounting aid for VariKont and +U1+

Technical Data

General specifications

Switching function	Normally closed (NC)
Output type	NAMUR with safety function
Rated operating distance	s_n 15 mm
Installation	flush
Assured operating distance	s_a 0 ... 12.15 mm
Reduction factor r_{AI}	0.4
Reduction factor r_{Cu}	0.3
Reduction factor r_{304}	0.85
Output type	2-wire

Nominal ratings

Nominal voltage	U_o	8.2 V (R_i approx. 1 k Ω)
Switching frequency	f	0 ... 150 Hz
Current consumption		
Measuring plate not detected		≥ 3 mA
Measuring plate detected		≤ 1 mA

Functional safety related parameters

MTTF _d	8119 a
Mission Time (T_M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-40 ... 100 °C (-40 ... 212 °F)
---------------------	---------------------------------

Mechanical specifications

Connection type	screw terminals
Information for connection	A maximum of two conductors with the same core cross section may be mounted on one terminal connection! tightening torque 1.2 Nm + 10 %
Core cross-section	up to 2.5 mm ²
Minimum core cross-section	without wire end ferrule 0.5 mm ² , with connector sleeves 0.34 mm ²
Maximum core cross-section	without wire end ferrule 2.5 mm ² , with connector sleeves 1.5 mm ²
Housing material	PBT/metal
Sensing face	PBT
Degree of protection	IP68

General information

Use in the hazardous area	see instruction manuals
---------------------------	-------------------------


Compliance with standards and directives

Standard conformity	
NAMUR	EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012


Approvals and certificates

FM approval	
Control drawing	116-0165
UL approval	cULus Listed, General Purpose
Ordinary Location	E87056
Hazardous Location	E501628
Control drawing	116-0454
CSA approval	cCSAus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤ 36 V

Dimensions

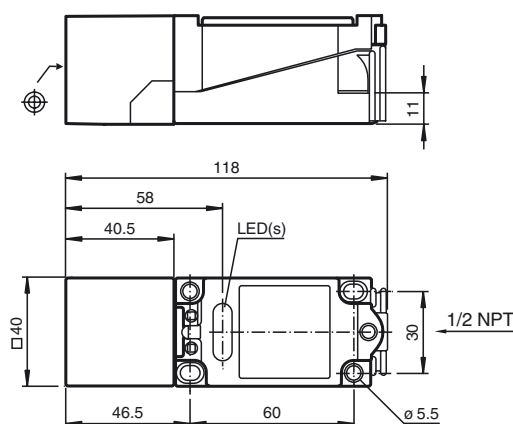

Electrical Connection




Data for application in connection with hazardous areas

Equipment protection level Ga , Gb , Da , Mb

Equipment protection level Ga

Type of protection intrinsic safety

CE marking  0102**Certificates**

Appropriate type NJ15S+U.-N..

ATEX certificate PTB 00 ATEX 2049 X

ATEX marking  II 1G Ex ia IIC T6...T1 Ga

Standards EN 60079-0:2012+A11:2013 , EN 60079-11:2012

IECEX certificate IECEX PTB 11.0092X

IECEX marking Ex ia IIC T6...T1 Ga

Standards IEC 60079-0:2011 , IEC 60079-11:2011

Effective internal capacitance C_i ≤ 180 nF
A cable length of 10 m is considered.Effective internal inductance L_i ≤ 150 μ H
A cable length of 10 m is considered.Maximum permissible ambient temperature T_{amb} Also observe the maximum permissible ambient temperature stated in the general technical data.
Keep to the lower of the two values.

for ATEX

at $U_i = 16$ V , $I_i = 25$ mA , $P_i = 34$ mW ,
T6 : 56 °C (132.8 °F)
T5 : 68 °C (154.4 °F)
T4 : 96 °C (204.8 °F)
T3 : 96 °C (204.8 °F)
T2 : 96 °C (204.8 °F)
T1 : 96 °C (204.8 °F)

at $U_i = 16$ V , $I_i = 25$ mA , $P_i = 64$ mW ,
T6 : 49 °C (120.2 °F)
T5 : 61 °C (141.8 °F)
T4 : 89 °C (192.2 °F)
T3 : 89 °C (192.2 °F)
T2 : 89 °C (192.2 °F)
T1 : 89 °C (192.2 °F)

at $U_i = 16$ V , $I_i = 52$ mA , $P_i = 169$ mW ,
T6 : 28 °C (82.4 °F)
T5 : 40 °C (104 °F)
T4 : 68 °C (154.4 °F)
T3 : 68 °C (154.4 °F)
T2 : 68 °C (154.4 °F)
T1 : 68 °C (154.4 °F)

at $U_i = 16$ V , $I_i = 76$ mA , $P_i = 242$ mW ,
T6 : 13 °C (55.4 °F)
T5 : 25 °C (77 °F)
T4 : 53 °C (127.4 °F)
T3 : 53 °C (127.4 °F)
T2 : 53 °C (127.4 °F)
T1 : 53 °C (127.4 °F)

for IECEX

at $U_i = 16$ V , $I_i = 25$ mA , $P_i = 34$ mW ,
T6 : 73 °C (163.4 °F)
T5 : 88 °C (190.4 °F)
T4 : 100 °C (212 °F)
T3 : 100 °C (212 °F)
T2 : 100 °C (212 °F)
T1 : 100 °C (212 °F)

at $U_i = 16$ V , $I_i = 25$ mA , $P_i = 64$ mW ,
T6 : 66 °C (150.8 °F)
T5 : 81 °C (177.8 °F)
T4 : 100 °C (212 °F)
T3 : 100 °C (212 °F)
T2 : 100 °C (212 °F)
T1 : 100 °C (212 °F)

at $U_i = 16$ V , $I_i = 52$ mA , $P_i = 169$ mW ,
T6 : 45 °C (113 °F)
T5 : 60 °C (140 °F)
T4 : 89 °C (192.2 °F)
T3 : 89 °C (192.2 °F)
T2 : 89 °C (192.2 °F)
T1 : 89 °C (192.2 °F)

at $U_i = 16$ V , $I_i = 76$ mA , $P_i = 242$ mW ,
T6 : 30 °C (86 °F)
T5 : 45 °C (113 °F)
T4 : 74 °C (165.2 °F)
T3 : 74 °C (165.2 °F)
T2 : 74 °C (165.2 °F)
T1 : 74 °C (165.2 °F)

Equipment protection level Gb

Type of protection	intrinsic safety	
CE marking	CE 0102	
Certificates		
Appropriate type	NJ15S+U.-N..	
ATEX certificate	PTB 00 ATEX 2049 X	
ATEX marking	II 1G Ex ia IIC T6...T1 Ga	
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012	
IECEX certificate	IECEX PTB 11.0092X	
IECEX marking	Ex ia IIC T6...T1 Ga	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Appropriate type	NJ15S+U.-N..	
Effective internal capacitance	C_i	≤ 180 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	≤ 150 μH A cable length of 10 m is considered.
Maximum permissible ambient temperature T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$, T6 : 73 °C (163.4 °F) T5 : 88 °C (190.4 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$, T6 : 66 °C (150.8 °F) T5 : 81 °C (177.8 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$, T6 : 45 °C (113 °F) T5 : 60 °C (140 °F) T4 : 89 °C (192.2 °F) T3 : 89 °C (192.2 °F) T2 : 89 °C (192.2 °F) T1 : 89 °C (192.2 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$, T6 : 30 °C (86 °F) T5 : 45 °C (113 °F) T4 : 74 °C (165.2 °F) T3 : 74 °C (165.2 °F) T2 : 74 °C (165.2 °F) T1 : 74 °C (165.2 °F)	

Equipment protection level Da

Type of protection	intrinsic safety	
CE marking	CE 0102	
Certificates		
Appropriate type	NJ15S+U.-N..	
ATEX certificate	PTB 00 ATEX 2049 X	
ATEX marking	II 1D Ex ia IIIC T135°C Da	
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012	
IECEX certificate	IECEX PTB 11.0092X	
IECEX marking	Ex ia IIIC T135°C Da	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	C_i	≤ 180 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	≤ 150 μH A cable length of 10 m is considered.
Maximum permissible ambient temperature T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$: 100 °C (212 °F) at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$: 89 °C (192.2 °F) at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$: 74 °C (165.2 °F)	

Equipment protection level Mb

Type of protection	intrinsic safety	
Certificates		
Appropriate type	NJ15S+U.-N..	
IECEX certificate	IECEX PTB 11.0092X	
IECEX marking	Ex ia I Mb	
Standards	IEC 60079-0:2011 , IEC 60079-11:2011	
Effective internal capacitance	C_i	≤ 180 nF A cable length of 10 m is considered.
Effective internal inductance	L_i	≤ 100 μH A cable length of 10 m is considered.

Release date: 2020-01-03 10:11 Date of issue: 2020-01-03 106680_eng.xml

Maximum permissible ambient temperature T_{amb}

Also observe the maximum permissible ambient temperature stated in the general technical data.
Keep to the lower of the two values.

at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$: 100 °C (212 °F)

at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$: 100 °C (212 °F)

at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$: 89 °C (192.2 °F)

at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$: 74 °C (165.2 °F)